

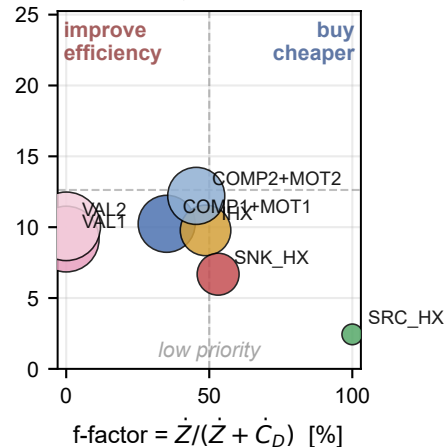
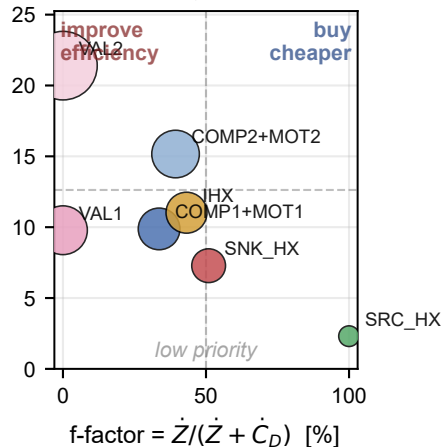
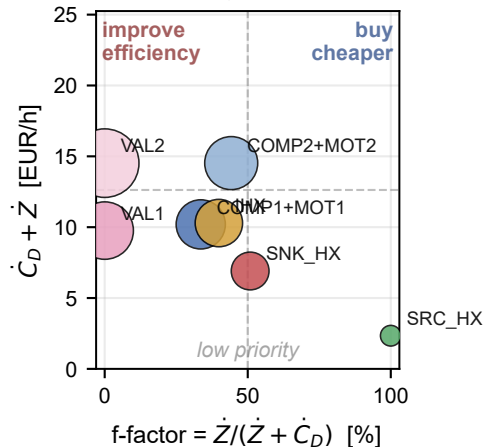
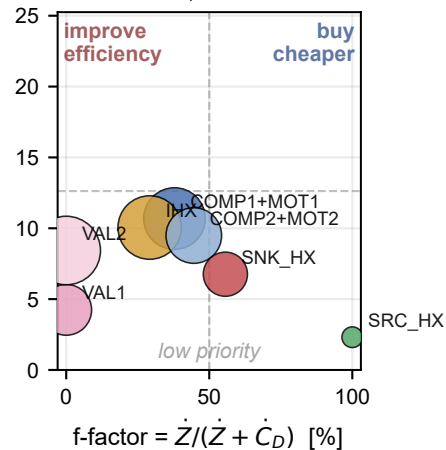


Tsatsaronis quadrant — best design per fluid pair ($T_{\text{steam}} = 110\text{ }^{\circ}\text{C}$)

R1270/R600 $LS = 30\%$ $T_{\text{src, in}} = 50\text{ }^{\circ}\text{C}$ $C_P = 90.2\text{ EUR/GJ}_{\text{ex}}$ $T_{\text{src, in}} = 50\text{ }^{\circ}\text{C}$ $C_P = 90.2\text{ EUR/GJ}_{\text{ex}}$ $T_{\text{src, in}} = 60\text{ }^{\circ}\text{C}$ $C_P = 87.7\text{ EUR/GJ}_{\text{ex}}$

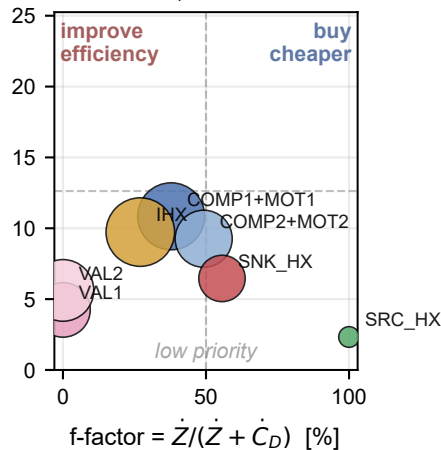

R290/R600a $LS = 30\%$ $T_{\text{src, in}} = 60\text{ }^{\circ}\text{C}$ $C_P = 81.7\text{ EUR/GJ}_{\text{ex}}$ $T_{\text{src, in}} = 60\text{ }^{\circ}\text{C}$ $C_P = 81.7\text{ EUR/GJ}_{\text{ex}}$ $T_{\text{src, in}} = 60\text{ }^{\circ}\text{C}$ $C_P = 81.8\text{ EUR/GJ}_{\text{ex}}$

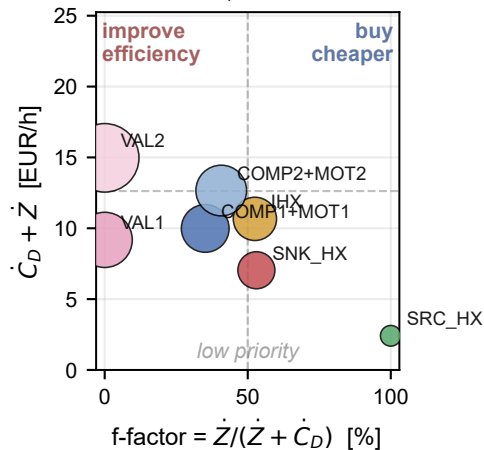

COMP1+MOT1 VAL1 IHX COMP2+MOT2 SNK_HX VAL2 marker size $\propto \dot{C}_D$
SRC_HX