

FIG. 1

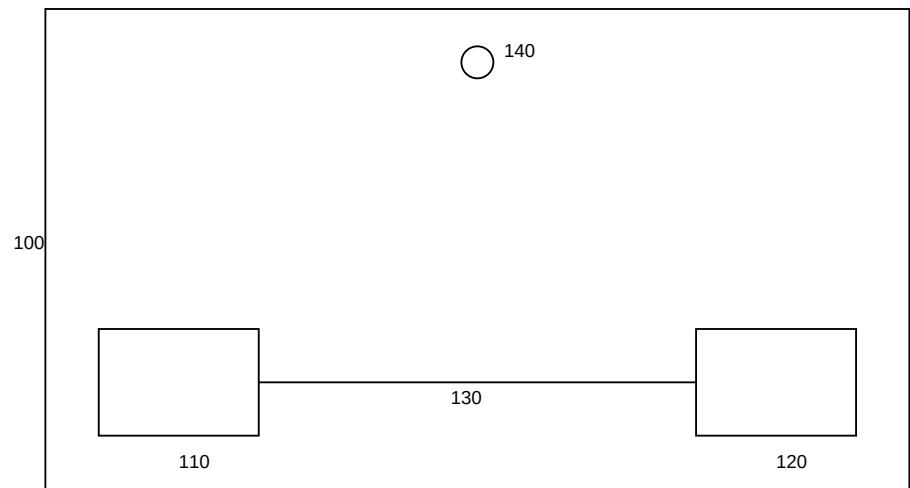


FIG. 1 shows a system 100 having sensor 110, actuator 120, communication bus 130, and controller 140.

DETAILED DESCRIPTION

Referring to FIG. 1, the system 100 includes a sensor 110 communicatively coupled to a controller 140 via a bus 130. An actuator 120 receives command signals from the controller 140 over the same bus 130. In some embodiments, the sensor 110 is an inertial measurement unit; in others, an optical encoder.

Claims

1. A system 100 comprising a sensor 110, an actuator 120, a bus 130, and a controller 140 coupled to said sensor 110 and said actuator 120 via said bus 130.
2. The system of claim 1, wherein the sensor 110 comprises an inertial measurement unit.