

## 1.8° Size 39mm Hybrid Stepping Motor

### ● General Specification for Hybrid Stepping Motor


| Item                  | Specifications                      |
|-----------------------|-------------------------------------|
| Step Angle            | 1.8°                                |
| Step Angle Accuracy   | ± 5% (full step, no load)           |
| Resistance Accuracy   | ± 10%                               |
| Inductance Accuracy   | ± 20%                               |
| Temperature Rise      | 80°C Max.(rated current,2 phase on) |
| Ambient Temperature   | -20°C~+50°C                         |
| Insulation Resistance | 100M Ω Min. ,500VDC                 |
| Dielectric Strength   | 500VAC for one minute               |
| Shaft Radial Play     | 0.02Max. (450 g-load)               |
| Shaft Axial Play      | 0.08Max. (450 g-load)               |
| Max. radial force     | 28N (20mm from the flange)          |
| Max. axial force      | 10N                                 |





### ● Size 39mm Hybrid Stepping Motor Specifications

| Model No.      |                | Rated Voltage | Current /Phase | Resistance /Phase | Inductance /Phase | Holding Torque | # of Leads | Rotor Inertia     | Weight | Detent Torque | Length |
|----------------|----------------|---------------|----------------|-------------------|-------------------|----------------|------------|-------------------|--------|---------------|--------|
| Single shaft   | Double shaft   | V             | A              | Ω                 | mH                | g-cm           |            | g-cm <sup>2</sup> | kg     | g-cm          | mm     |
| FL39ST20-0404A | FL39ST20-0404B | 2.64          | 0.4            | 6.6               | 7.5               | 650            | 4          | 11                | 0.12   | 50            | 20     |
| FL39ST20-0506A | FL39ST20-0506B | 6.5           | 0.5            | 13                | 7.5               | 800            | 6          |                   |        |               |        |
| FL39ST34-0404A | FL39ST34-0404B | 12            | 0.4            | 30                | 32                | 2100           | 4          | 20                | 0.18   | 120           | 34     |
| FL39ST34-0306A | FL39ST34-0306B | 12            | 0.3            | 40                | 20                | 1300           | 6          |                   |        |               |        |
| FL39ST38-0504A | FL39ST38-0504B | 12            | 0.5            | 24                | 45                | 2900           | 4          | 24                | 0.2    | 180           | 38     |
| FL39ST38-0806A | FL39ST38-0806B | 6             | 0.8            | 7.5               | 6                 | 2000           | 6          |                   |        |               |        |
| FL39ST44-0304A | FL39ST44-0304B | 12            | 0.3            | 40                | 100               | 2800           | 4          | 40                | 0.25   | 250           | 44     |

- **Dimension**

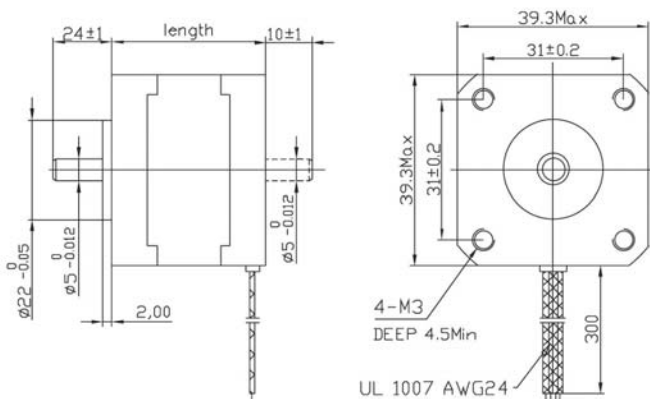

## Wiring Diagram



## 1.8° Size 39mm Hybrid Stepping Motor

### ● Pull out Torque Curve

