
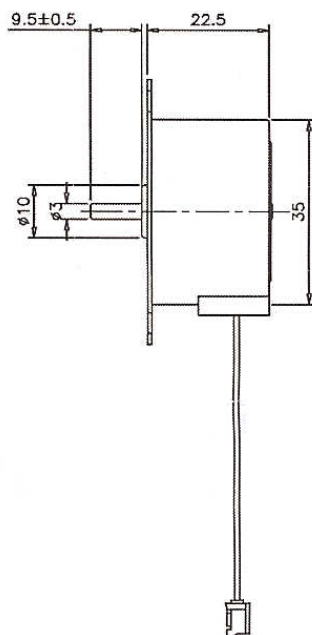


YM2754

Drive Voltage	12 VDC
Current per Phase	1.1 A
Resistance Per Winding	20 Ω
Phase	4
Excitation Mode	Uni-polar Drive
Pole	24 POLE
Step angle(Output shaft)	7.5°
Detent Torque	150 gf-cm
Holding Torque	700 gf-cm
Max.starting frequency	600 pps
Max.response frequency	550 pps
12V 100pps Temperature rise	65°C
Insulation Resistace	10M Ω (DC 500V)
Dielectric Strength	AV 600V, 1 SECOND (60Hz)
Weigth	90 gf
Noise Level	30 db

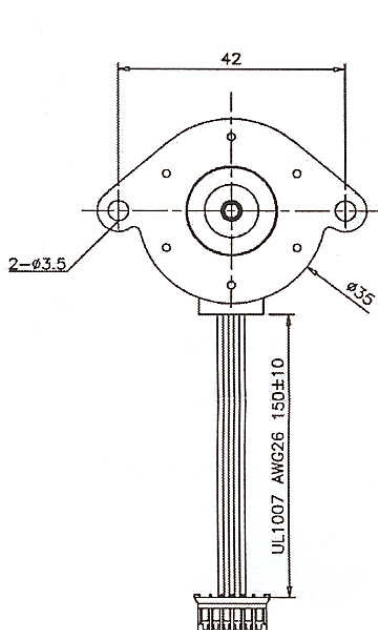

PIN CONNECTIONS

PIN	COLOR	CCW → CW					PHASE
1	ORANGE			+	+		/B
2	PURPLE		+	+			/A
3	YELLOW	+	+			+	B
4	BLUE	+			+	+	A
5							
6	WHITE	+	+	+	+	+	COM

