Disturbance profiles (first episode of each test family)

SYNTHETIC DRY RUN
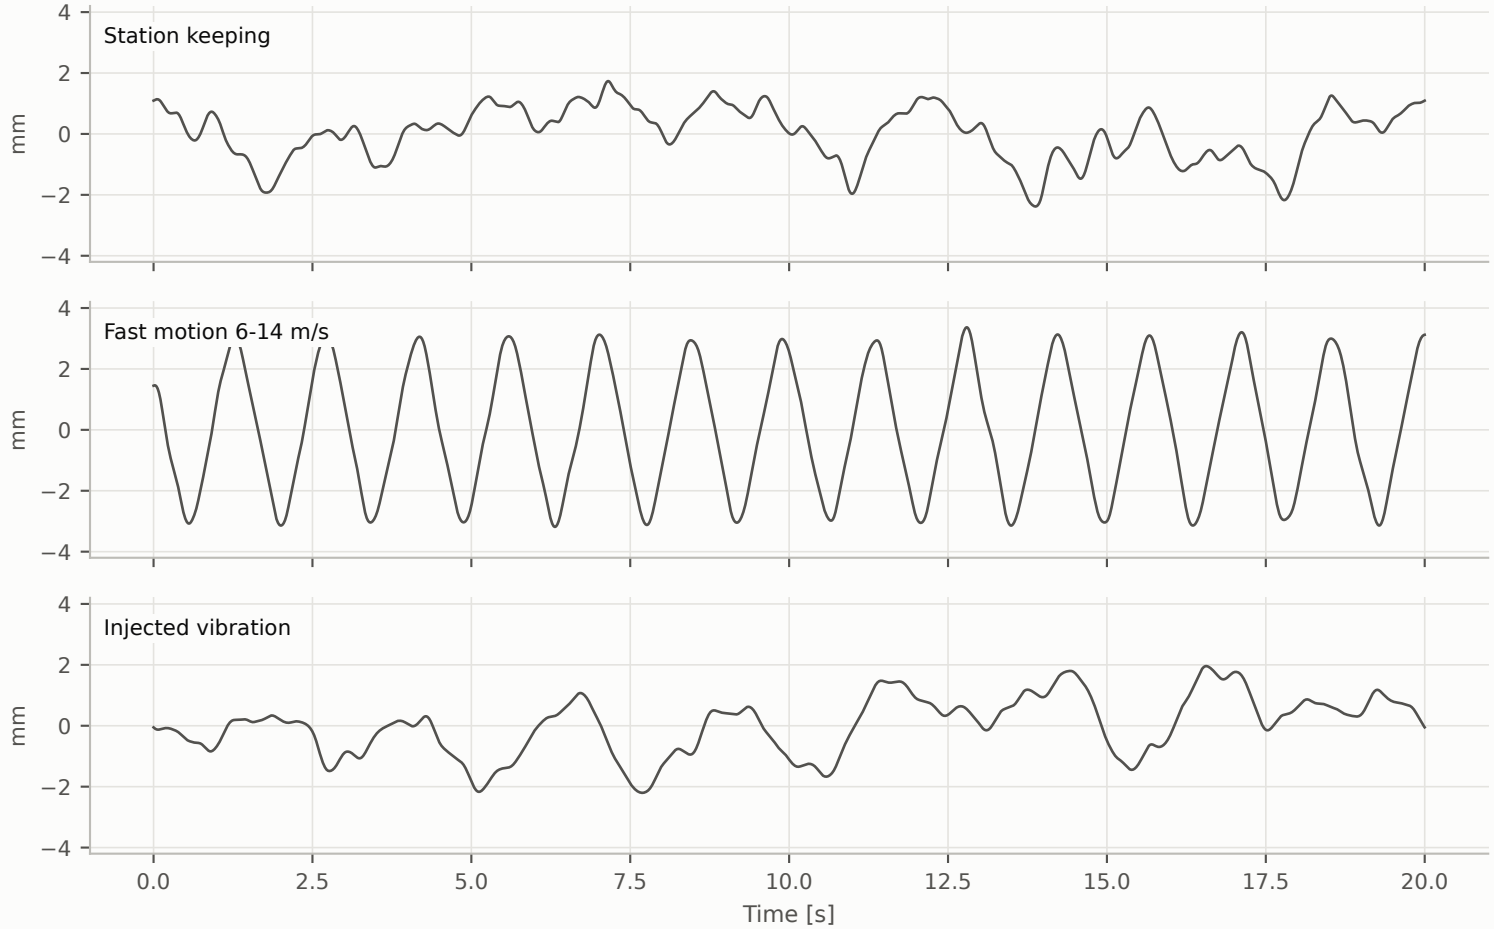
Rail encoder position (injected vibration not included). HAPS lateral position at 20 km = rail × 1000.