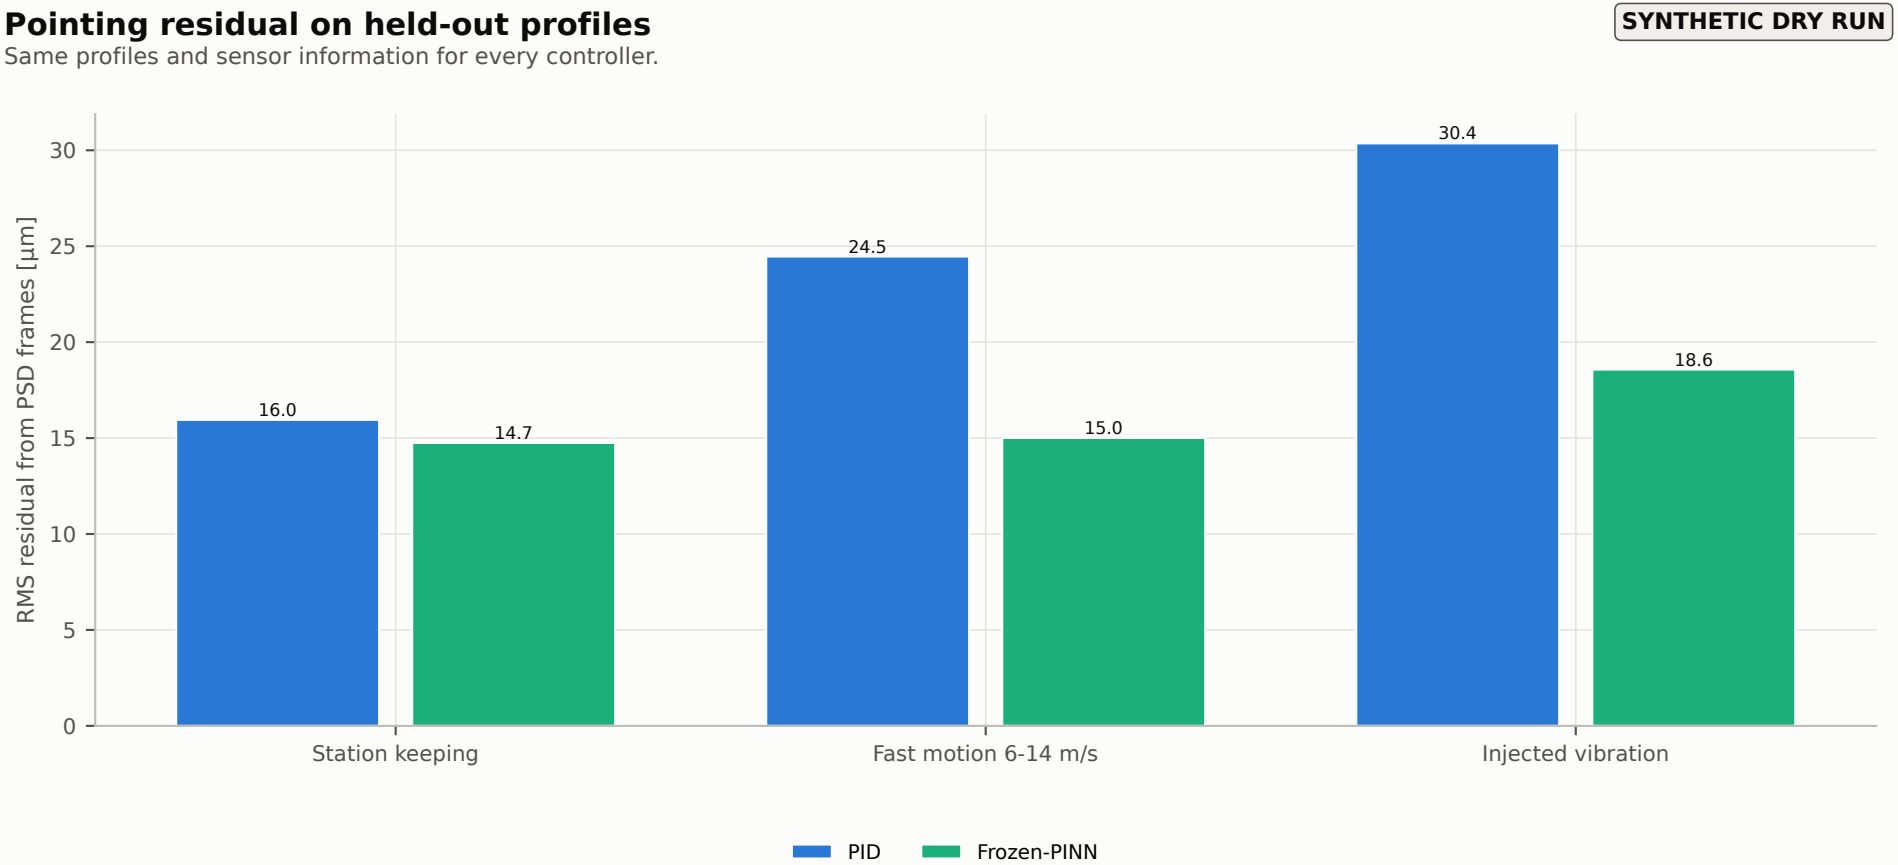
Pointing residual on held-out profiles
Same profiles and sensor information for every controller.
SYNTHETIC DRY RUN
RMS residual from PSD frames [µm]
0
5
10
15
20
25
30
16.0
14.7
24.5
15.0
30.4
18.6
Station keeping
Fast motion 6-14 m/s
Injected vibration
PID
Frozen-PINN