HAPS-equivalent adaptive-QAM data rate (10 Mbaud, 82.4% payload) versus link SNR

SYNTHETIC DRY RUN
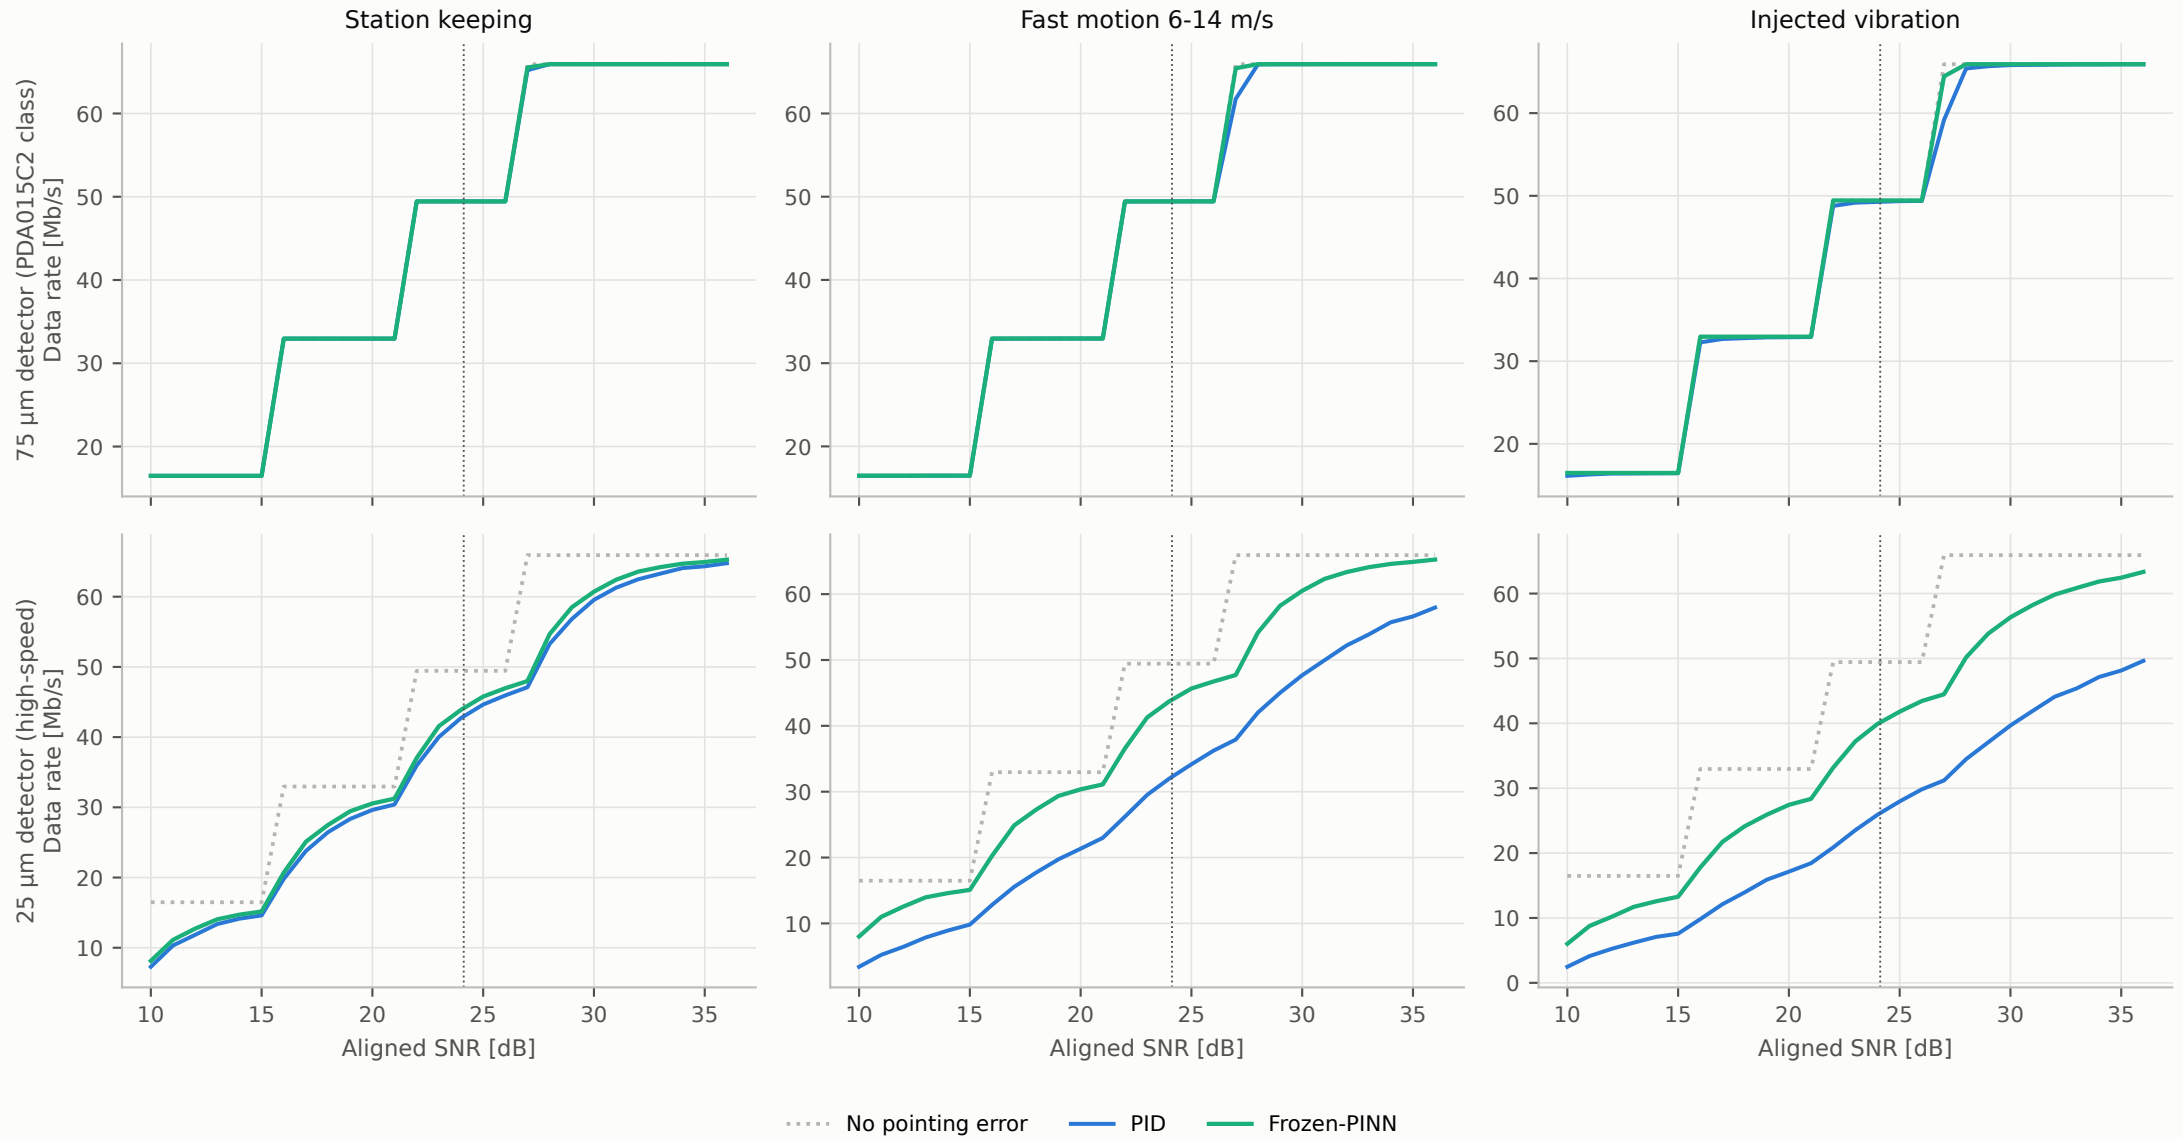
Dotted vertical: operating point (FEC threshold + 3 dB); dashed horizontal: HD-FEC 3.8e-3. SNR scales with received power squared (IM/DD).