64-QAM outage at the operating point

SYNTHETIC DRY RUN
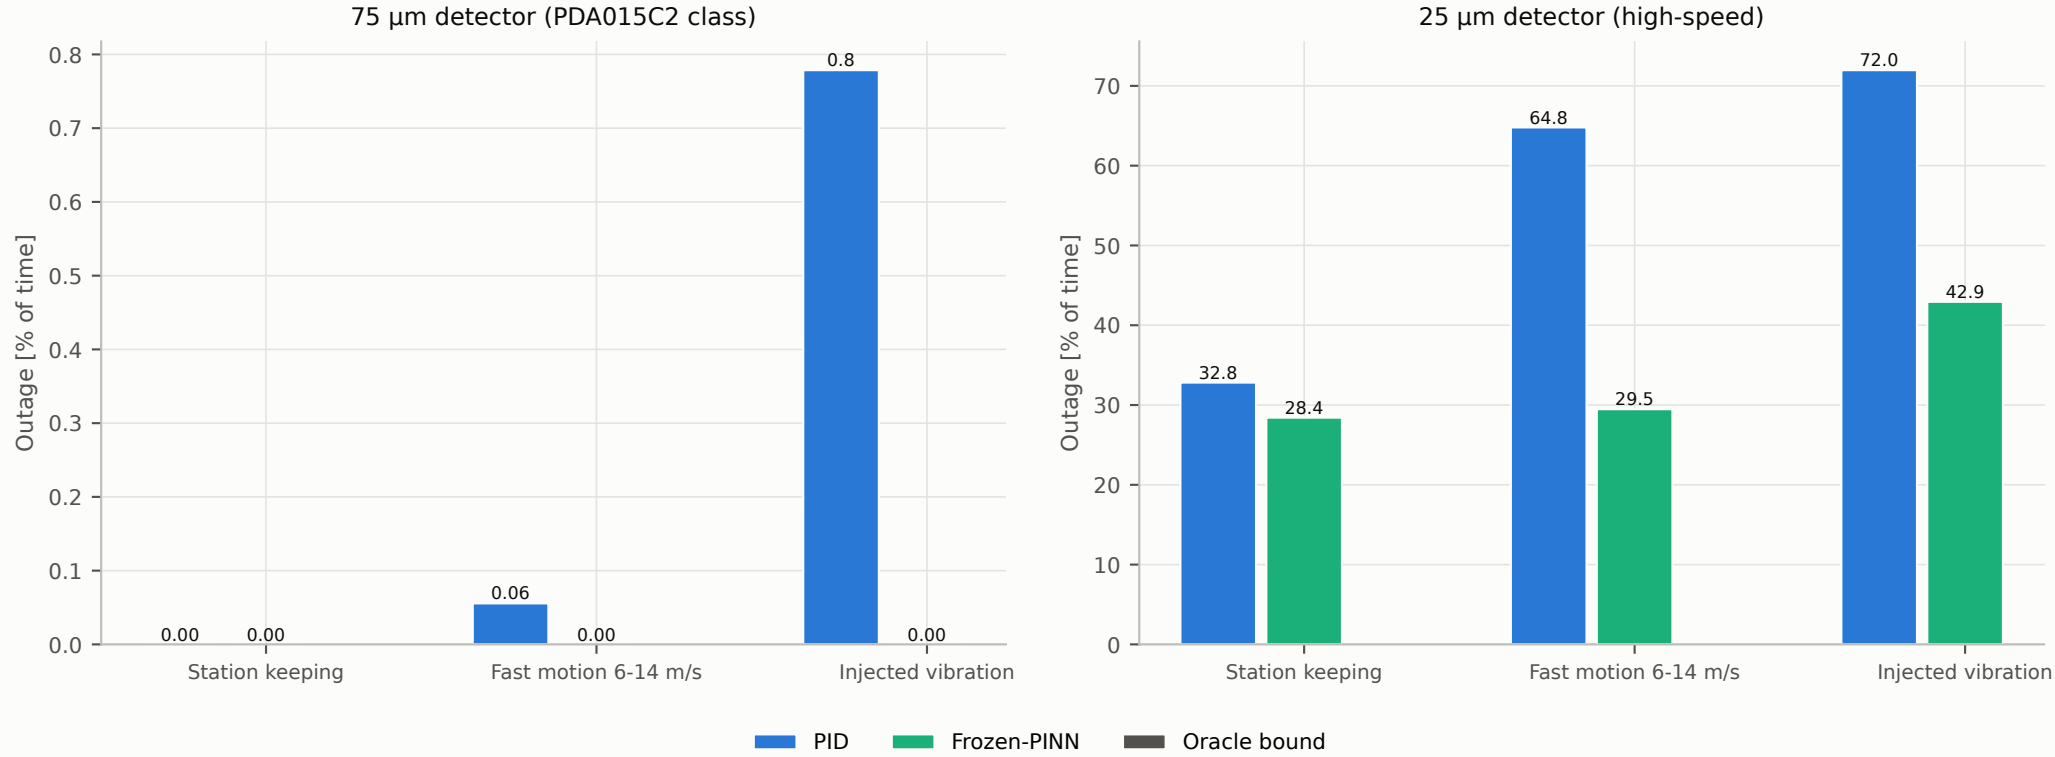
Fraction of time below the HD-FEC threshold, HAPS-equivalent receiver, aligned SNR = threshold + 3 dB. Lower is better.