传感层性能

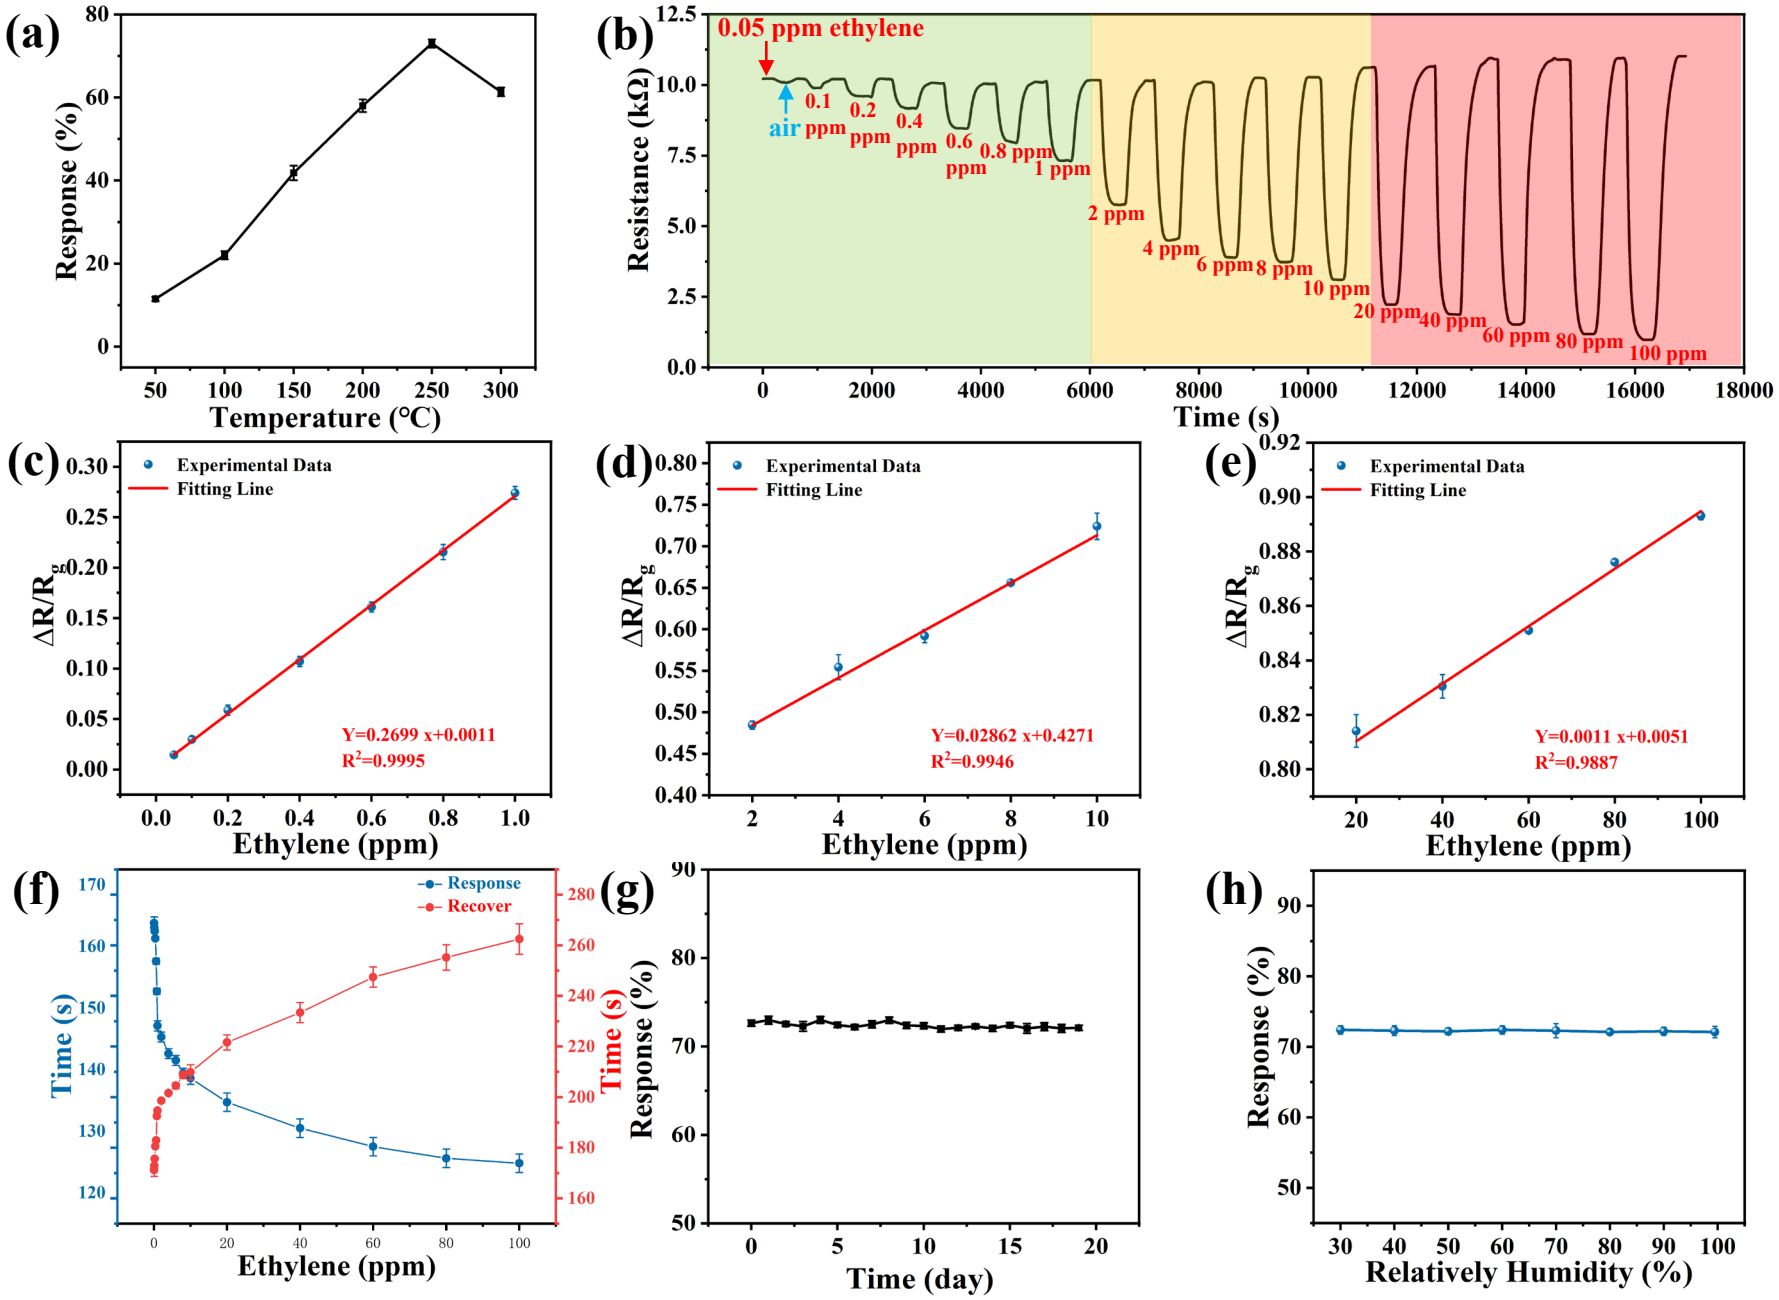
(a)
Response (%)
Temperature (°C)
(b)
0.05 ppm ethylene
air
0.1 ppm
0.2 ppm
0.4 ppm
0.6 ppm
0.8 ppm
1 ppm
2 ppm
4 ppm
6 ppm
8 ppm
10 ppm
20 ppm
40 ppm
60 ppm
80 ppm
100 ppm
Resistance (kΩ)
Time (s)
(c)
Experimental Data
Fitting Line
Y=0.2699 x+0.0011
R²=0.9995
ΔR/Rg
Ethylene (ppm)
(d)
Experimental Data
Fitting Line
Y=0.02862 x+0.4271
R²=0.9946
ΔR/Rg
Ethylene (ppm)
(e)
Experimental Data
Fitting Line
Y=0.0011 x+0.0051
R²=0.9887
ΔR/Rg
Ethylene (ppm)
(f)
Response
Recover
Time (s)
Time (s)
Ethylene (ppm)
(g)
Response (%)
Time (day)
(h)
Response (%)
Relatively Humidity (%)