




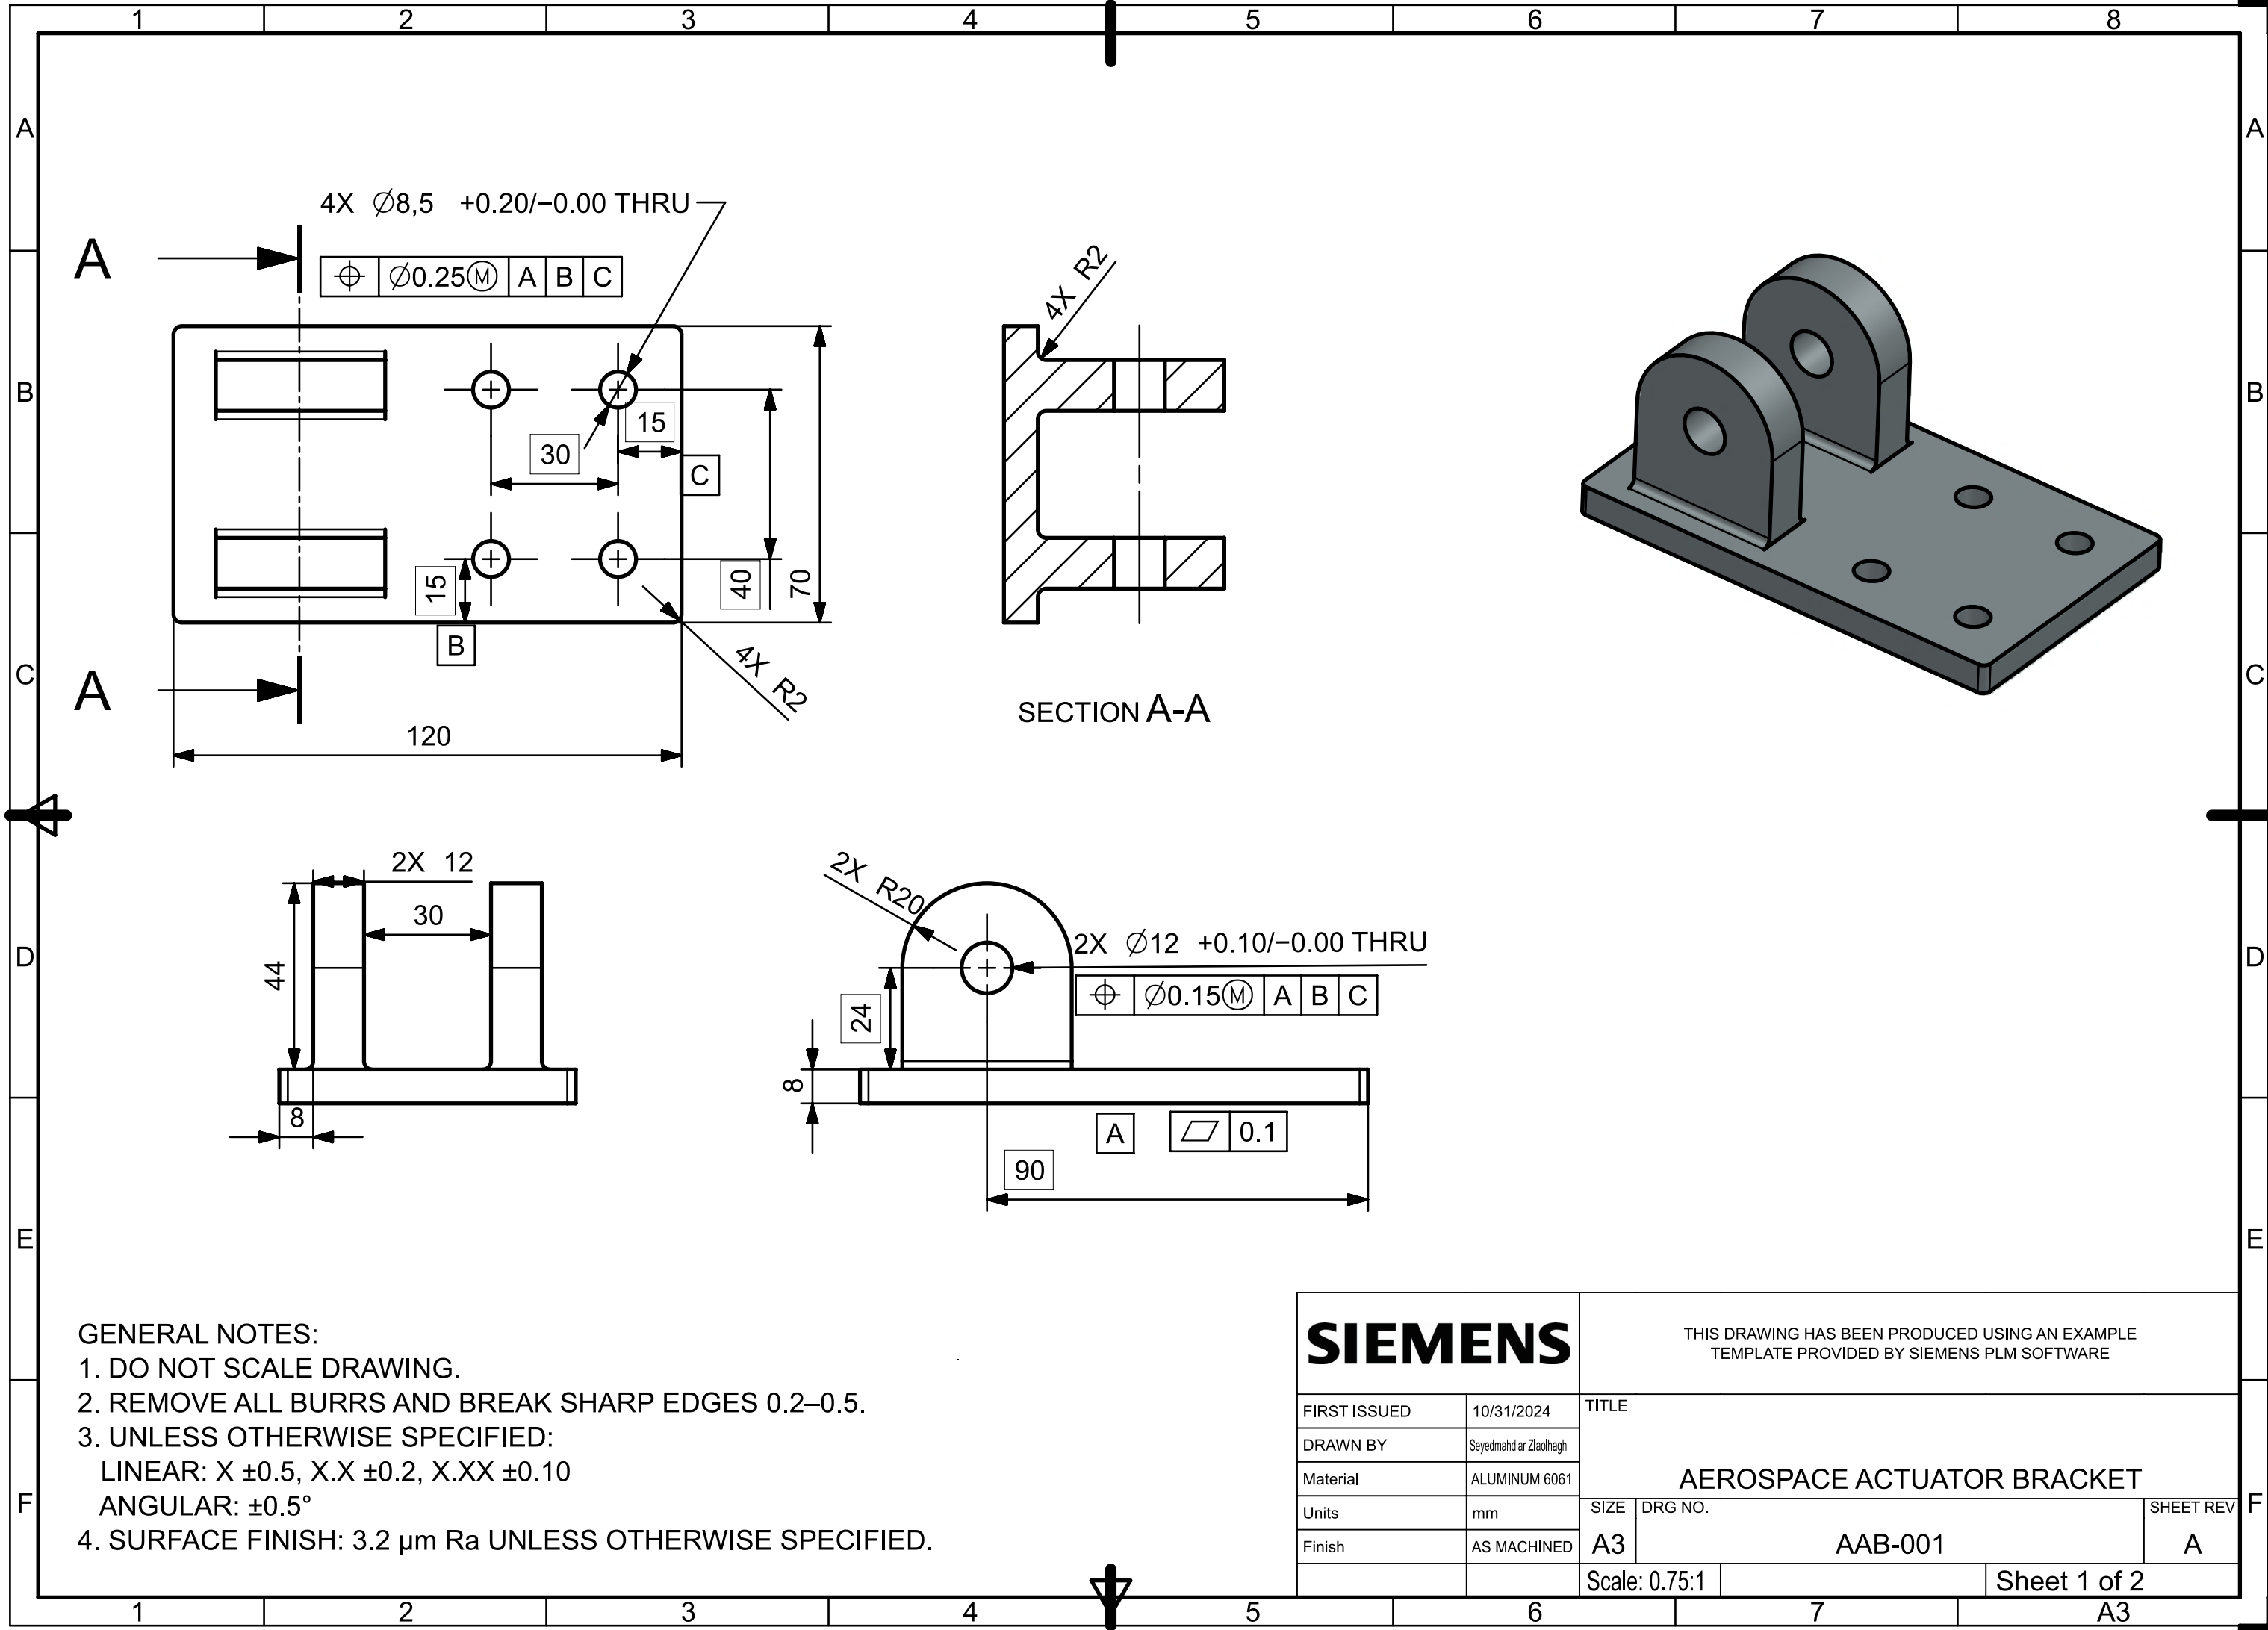

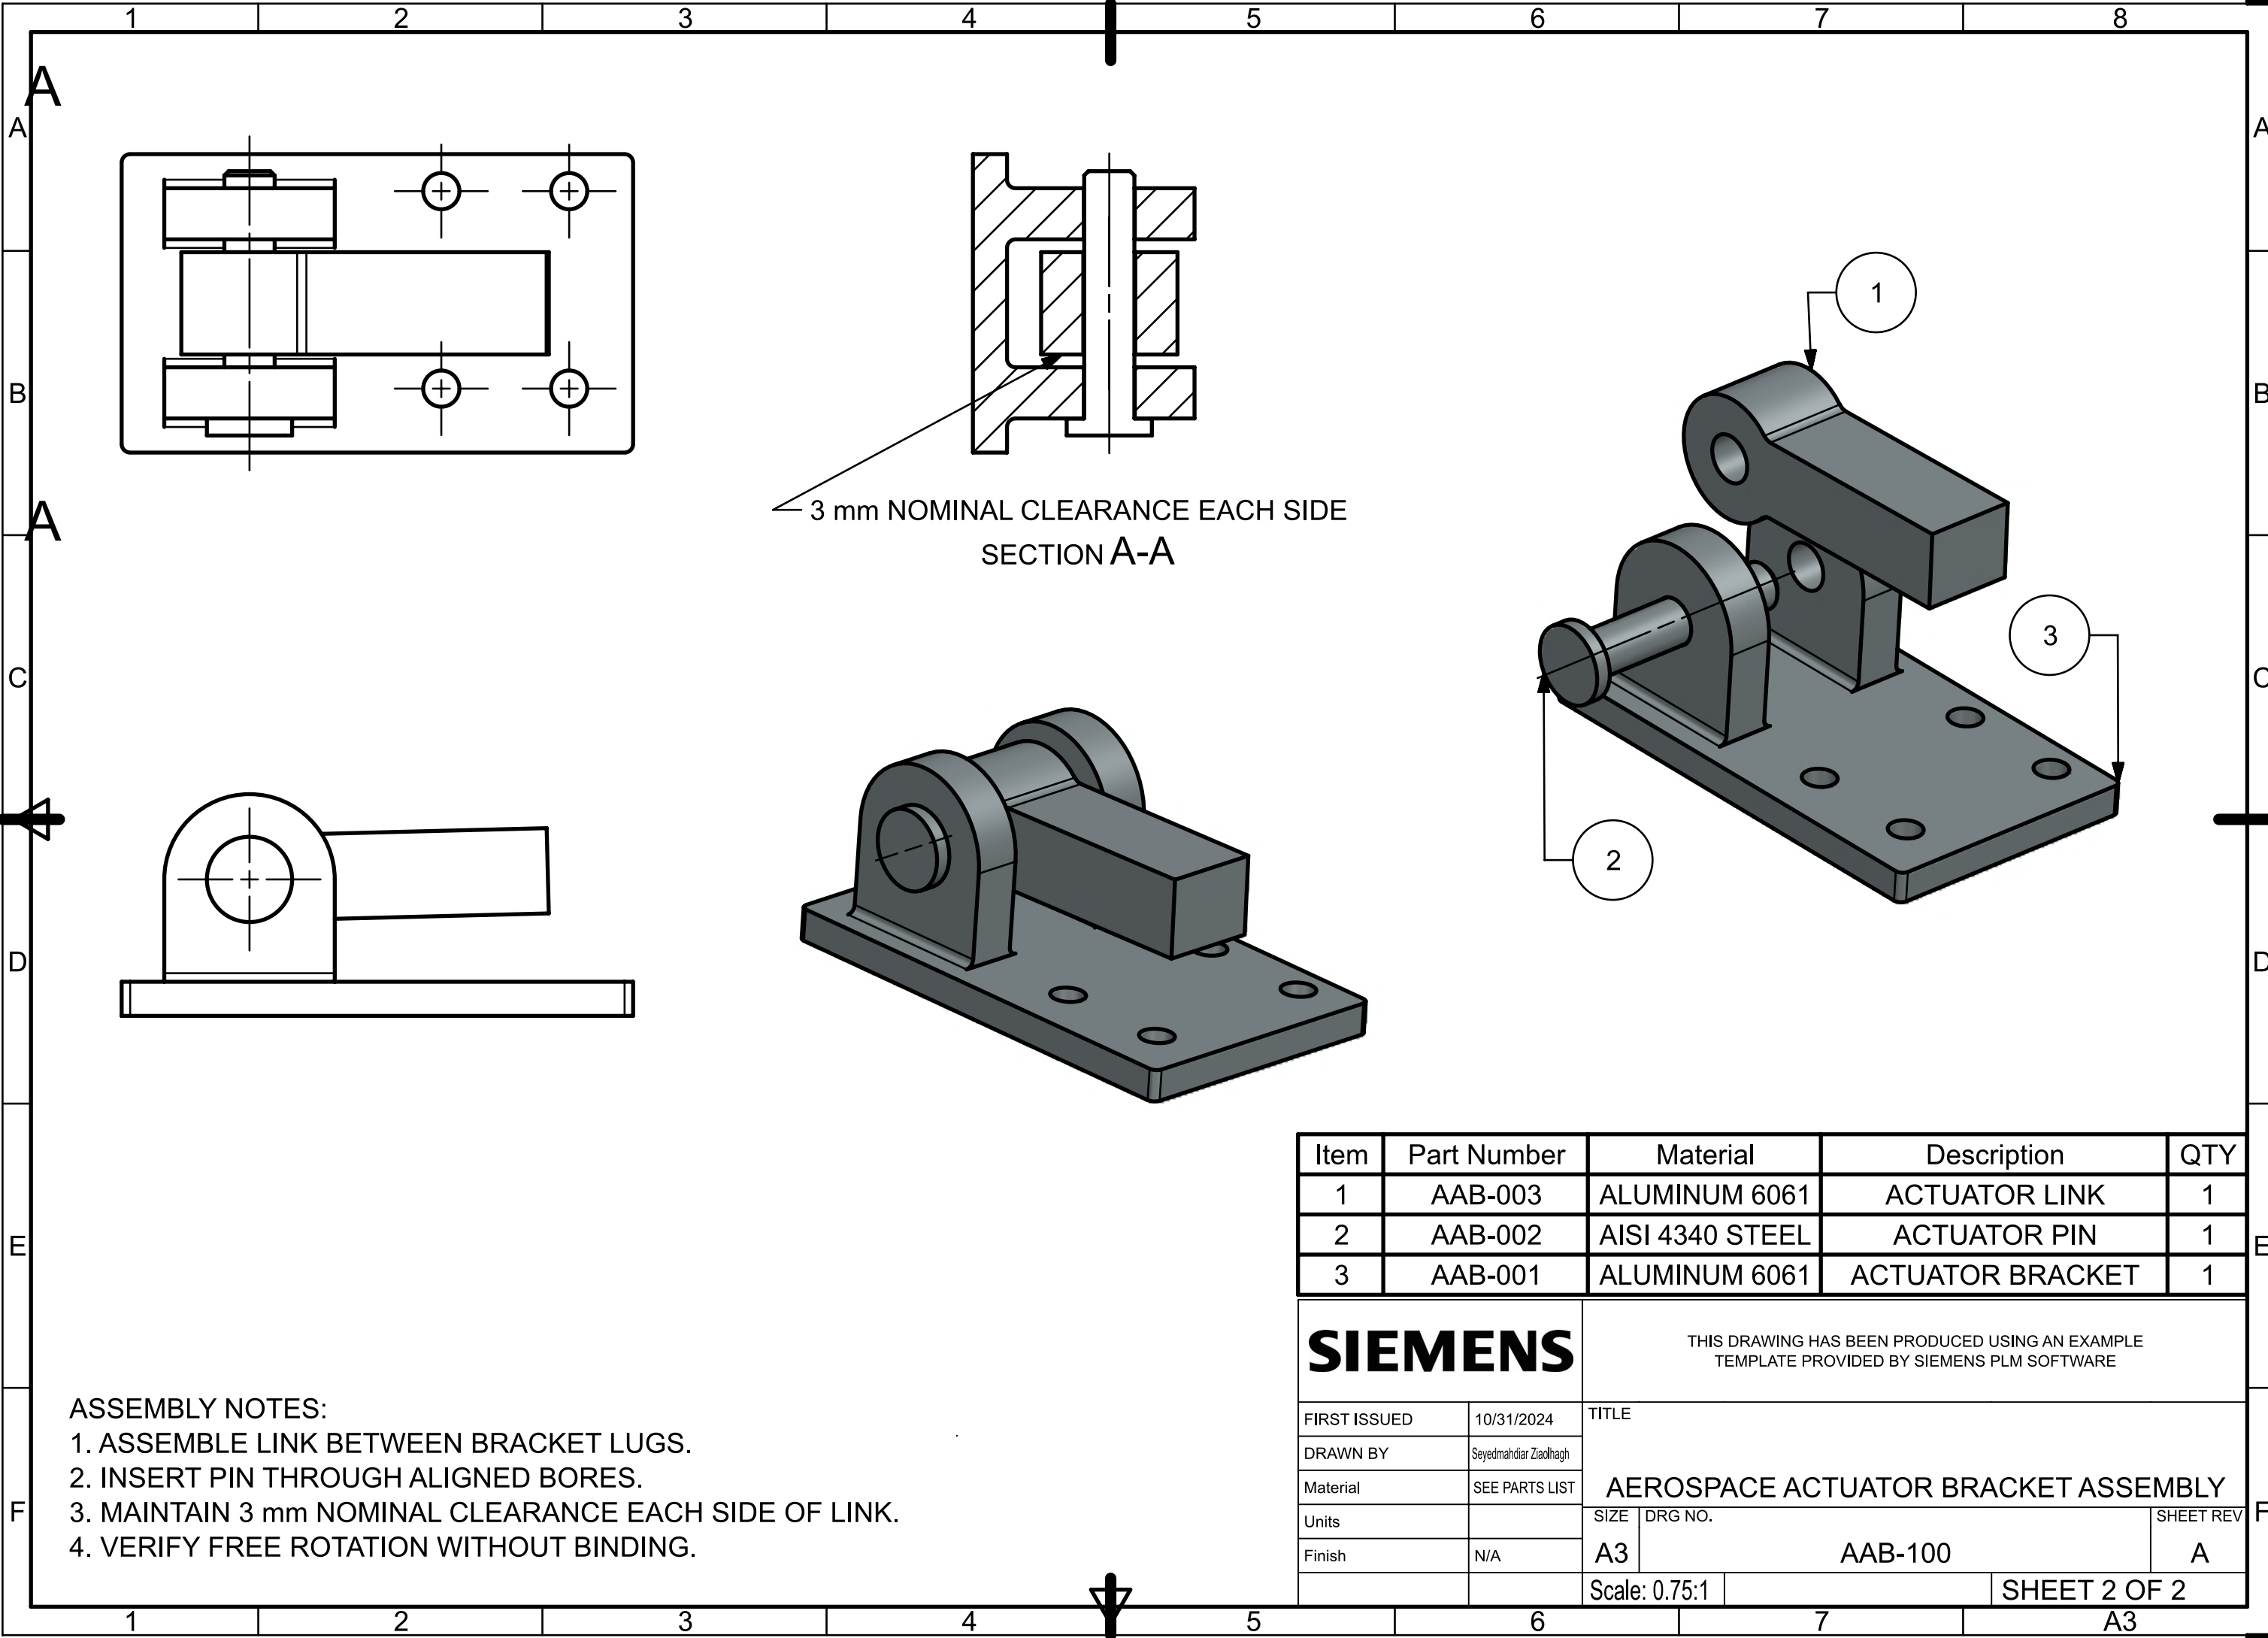

3 mm NOMINAL CLEARANCE EACH SIDE
SECTION A-A

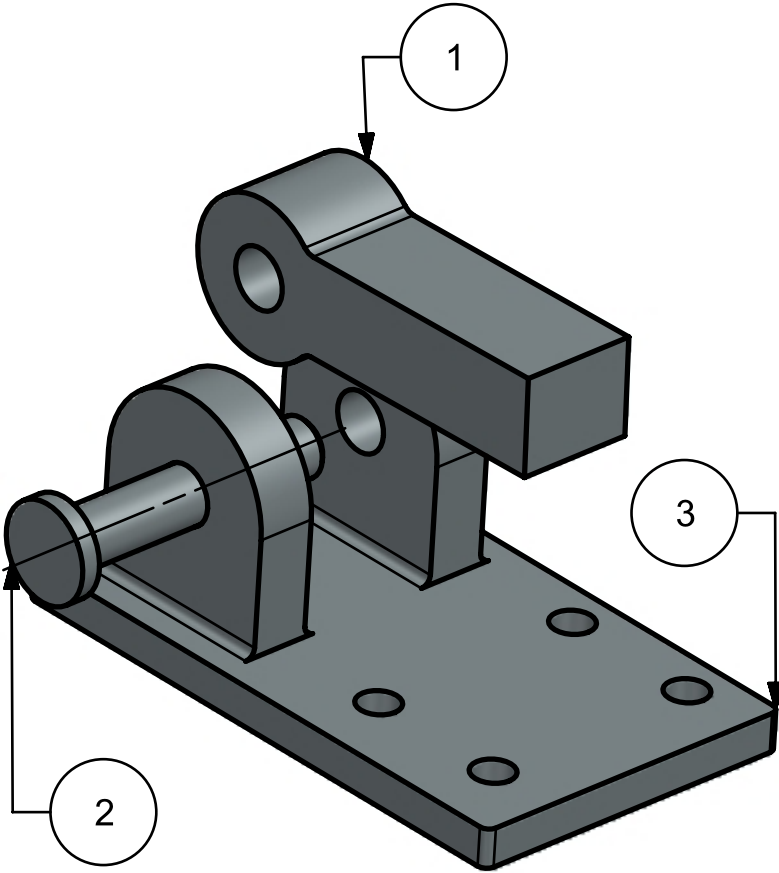

- ASSEMBLY NOTES:
1. ASSEMBLE LINK BETWEEN BRACKET LUGS.
 2. INSERT PIN THROUGH ALIGNED BORES.
 3. MAINTAIN 3 mm NOMINAL CLEARANCE EACH SIDE OF LINK.
 4. VERIFY FREE ROTATION WITHOUT BINDING.

Item	Part Number	Material	Description	QTY
1	AAB-003	ALUMINUM 6061	ACTUATOR LINK	1
2	AAB-002	AISI 4340 STEEL	ACTUATOR PIN	1
3	AAB-001	ALUMINUM 6061	ACTUATOR BRACKET	1

SIEMENS		THIS DRAWING HAS BEEN PRODUCED USING AN EXAMPLE TEMPLATE PROVIDED BY SIEMENS PLM SOFTWARE		
FIRST ISSUED	10/31/2024	TITLE		
DRAWN BY	Seyedmahdiar Ziaodinagh			
Material	SEE PARTS LIST	AEROSPACE ACTUATOR BRACKET ASSEMBLY		
Units		SIZE	DRG NO.	SHEET REV
Finish	N/A	A3	AAB-100	A
		Scale: 0.75:1	SHEET 2 OF 2	

A3