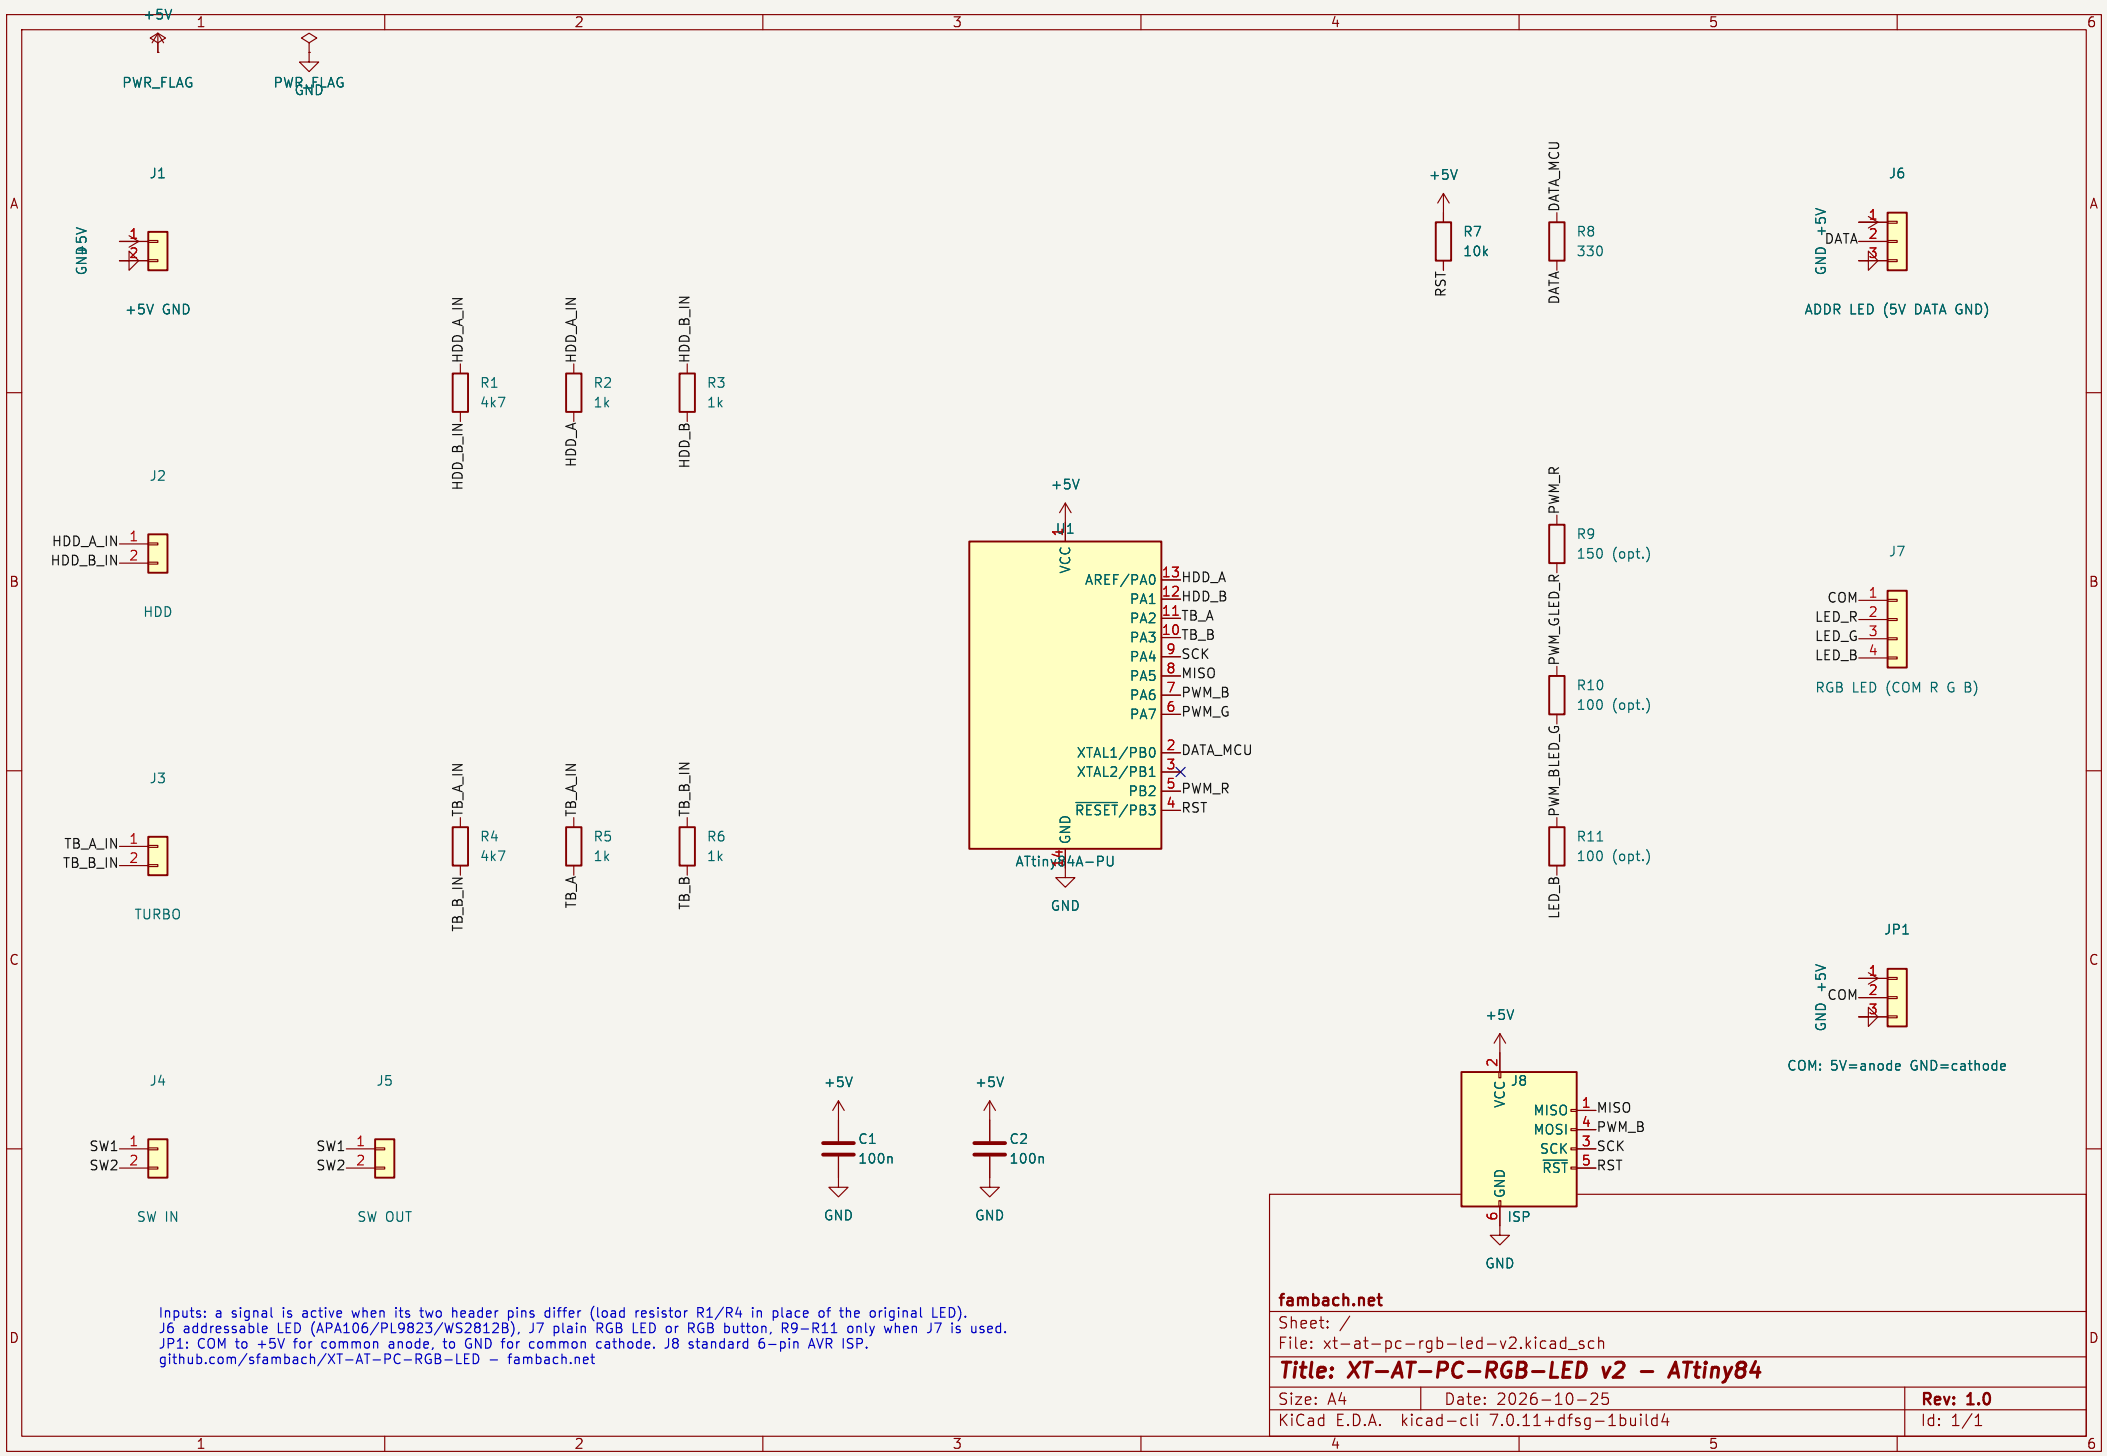



Inputs: a signal is active when its two header pins differ (load resistor R1/R4 in place of the original LED).
J6 addressable LED (APA106/PL9823/WS2812B), J7 plain RGB LED or RGB button, R9–R11 only when J7 is used.
JP1: COM to +5V for common anode, to GND for common cathode. J8 standard 6-pin AVR ISP.
github.com/sfambach/XT-AT-PC-RGB-LED – fambach.net

**fambach.net**

Sheet: /
File: xt-at-pc-rgb-led-v2.kicad_sch

***Title: XT-AT-PC-RGB-LED v2 – ATtiny84***

| Size: A4 | Date: 2026-10-25 | **Rev: 1.0** |
|---|---|---|
| KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4 | | Id: 1/1 |