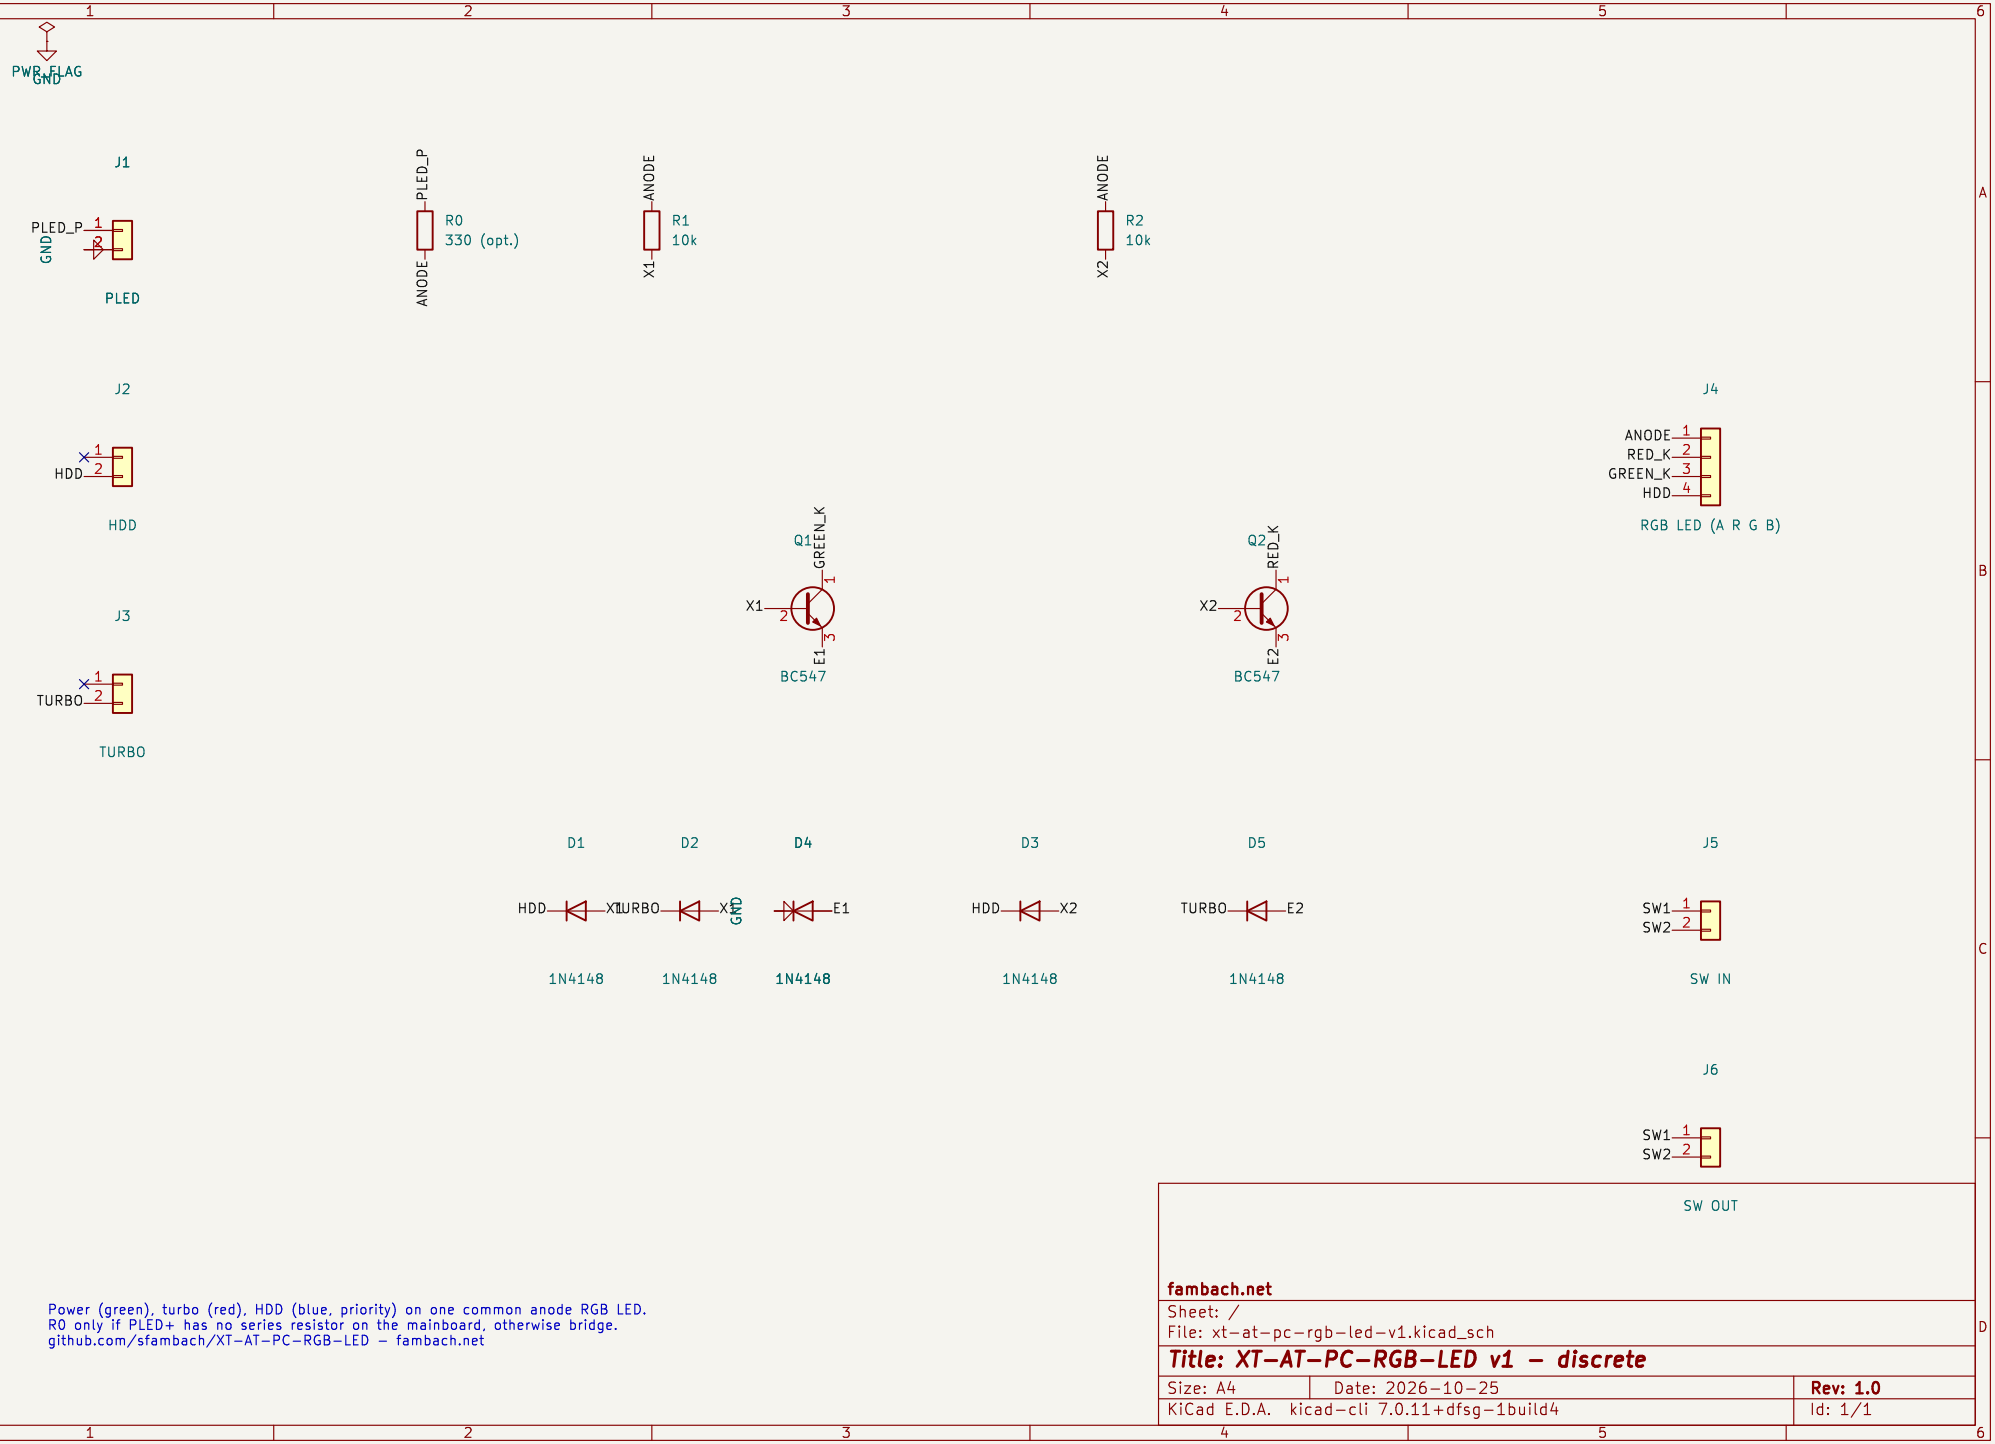

PWR_FLAG
GND
J1
PLED_P
GND
PLED
R0
330 (opt.)
PLED_P
ANODE
R1
10k
ANODE
X1
R2
10k
ANODE
X2
J2
HDD
HDD
J3
TURBO
TURBO
Q1
GREEN_K
X1
BC547
Q2
RED_K
X2
BC547
J4
ANODE
RED_K
GREEN_K
HDD
RGB LED (A R G B)
D1
HDD
X1
1N4148
D2
TURBO
X2
GND
1N4148
D4
E1
1N4148
D3
HDD
X2
1N4148
D5
TURBO
E2
1N4148
J5
SW1
SW2
SW IN
J6
SW1
SW2
SW OUT
Power (green), turbo (red), HDD (blue, priority) on one common anode RGB LED.
R0 only if PLED+ has no series resistor on the mainboard, otherwise bridge.
github.com/sfambach/XT-AT-PC-RGB-LED – fambach.net
fambach.net
Sheet: /
File: xt-at-pc-rgb-led-v1.kicad_sch
Title: XT-AT-PC-RGB-LED v1 – discrete
Size: A4
Date: 2026-10-25
Rev: 1.0
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4
Id: 1/1