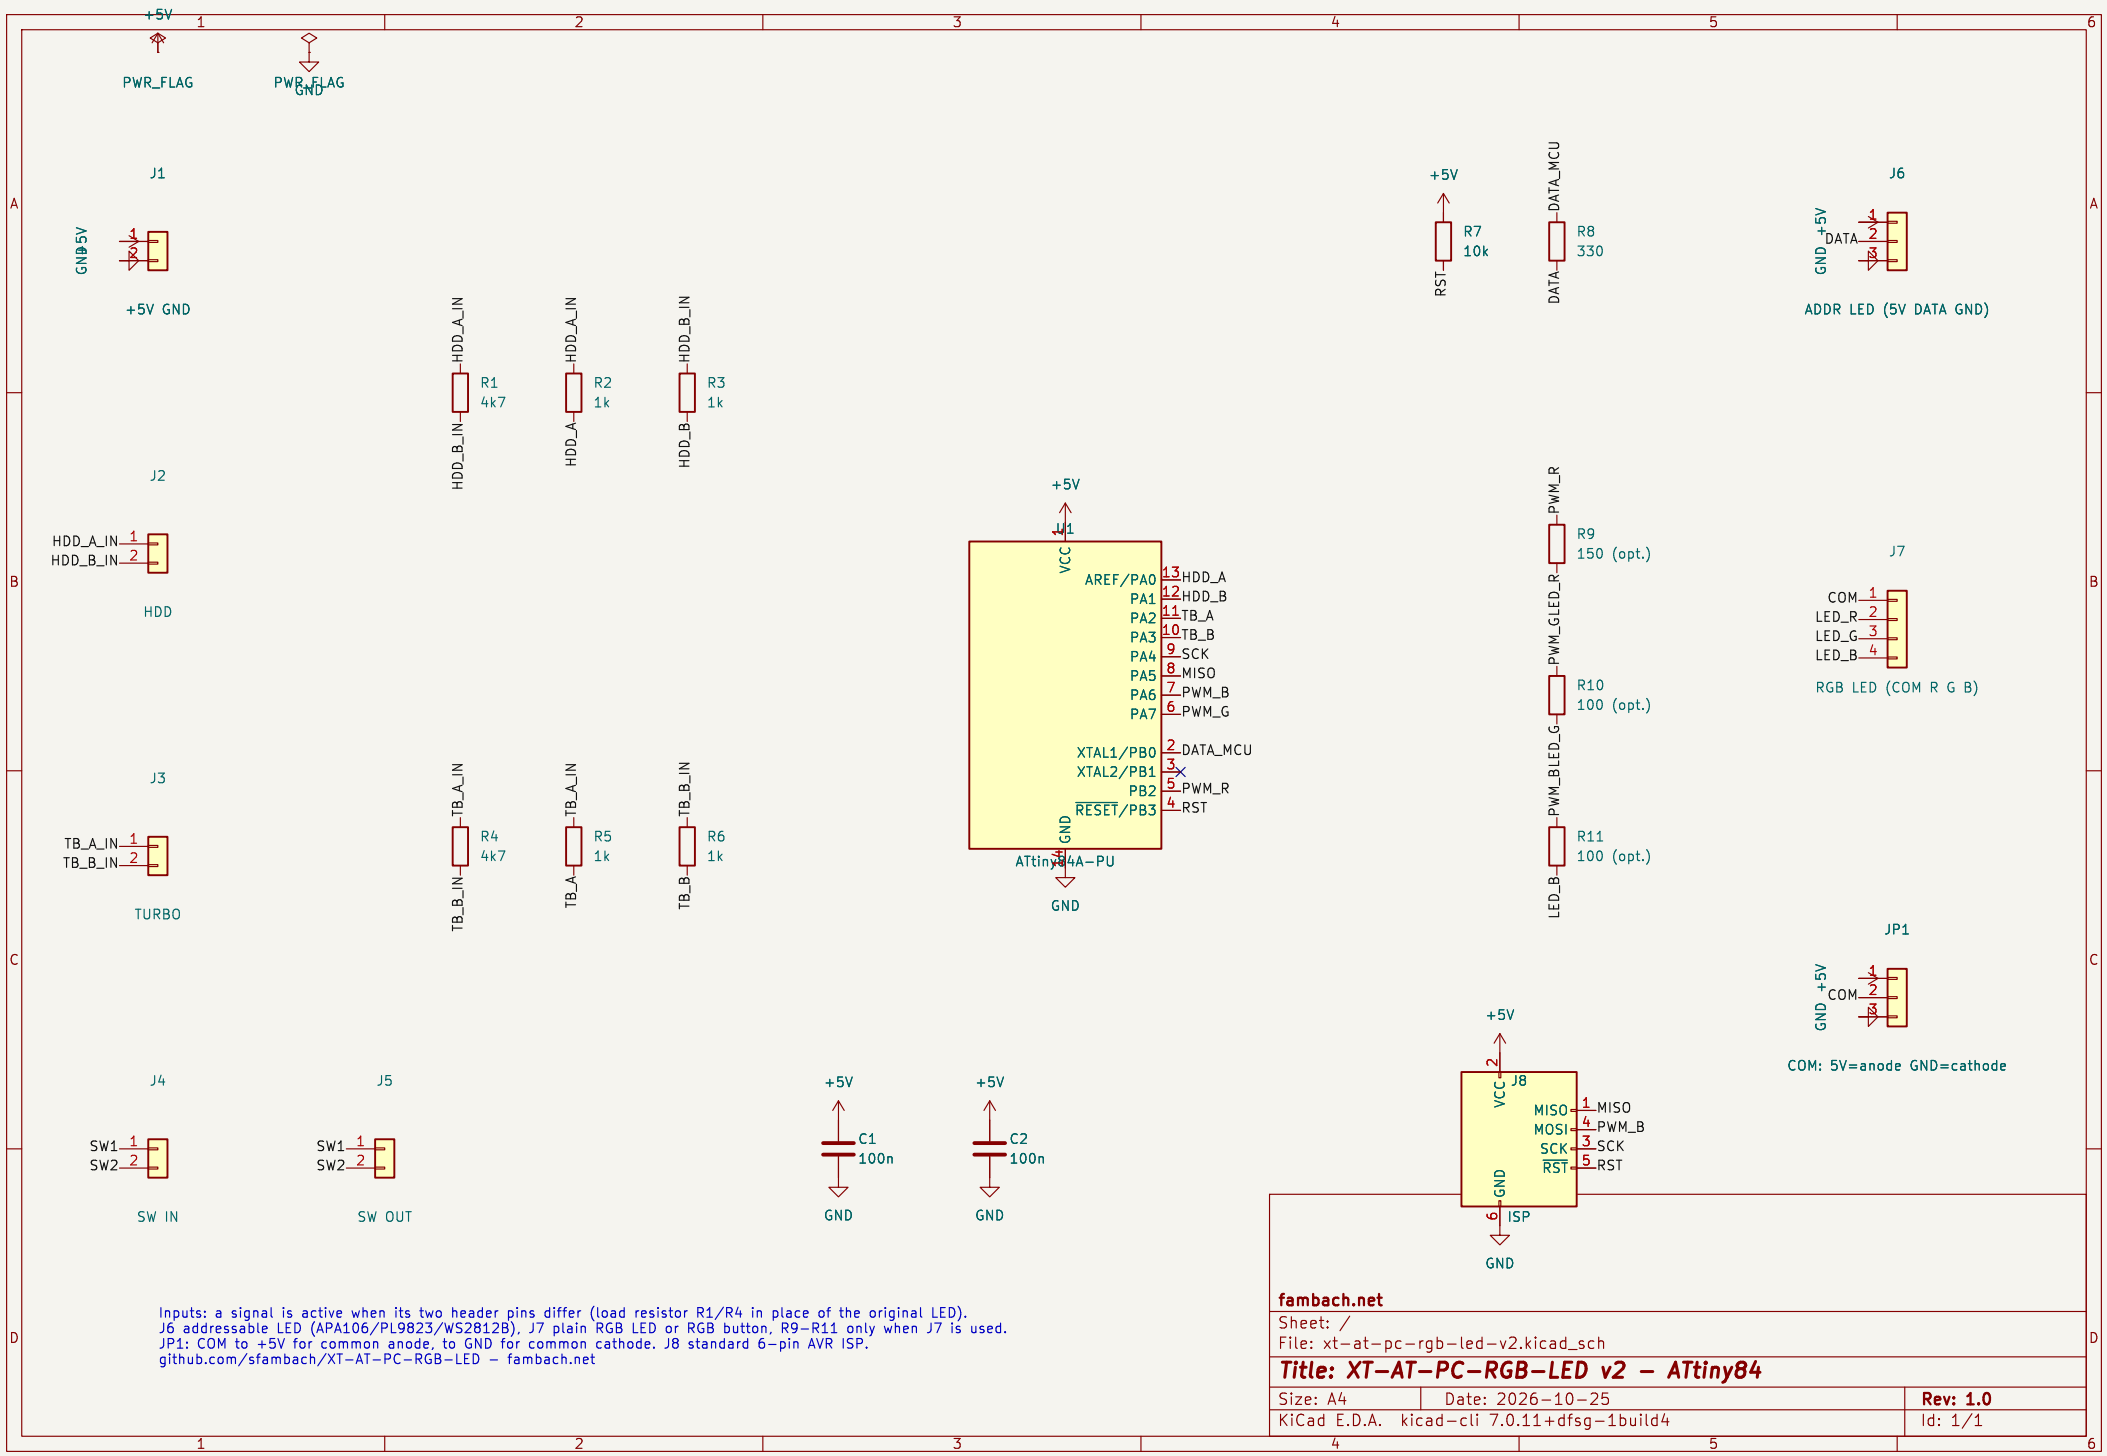


Inputs: a signal is active when its two header pins differ (load resistor R1/R4 in place of the original LED).
J6 addressable LED (APA106/PL9823/WS2812B), J7 plain RGB LED or RGB button, R9–R11 only when J7 is used.
JP1: COM to +5V for common anode, to GND for common cathode. J8 standard 6-pin AVR ISP.
github.com/sfambach/XT-AT-PC-RGB-LED – fambach.net

fambach.net

Sheet: /
File: xt-at-pc-rgb-led-v2.kicad_sch

Title: XT-AT-PC-RGB-LED v2 – ATtiny84

Size: A4	Date: 2026-10-25	**Rev: 1.0**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/1