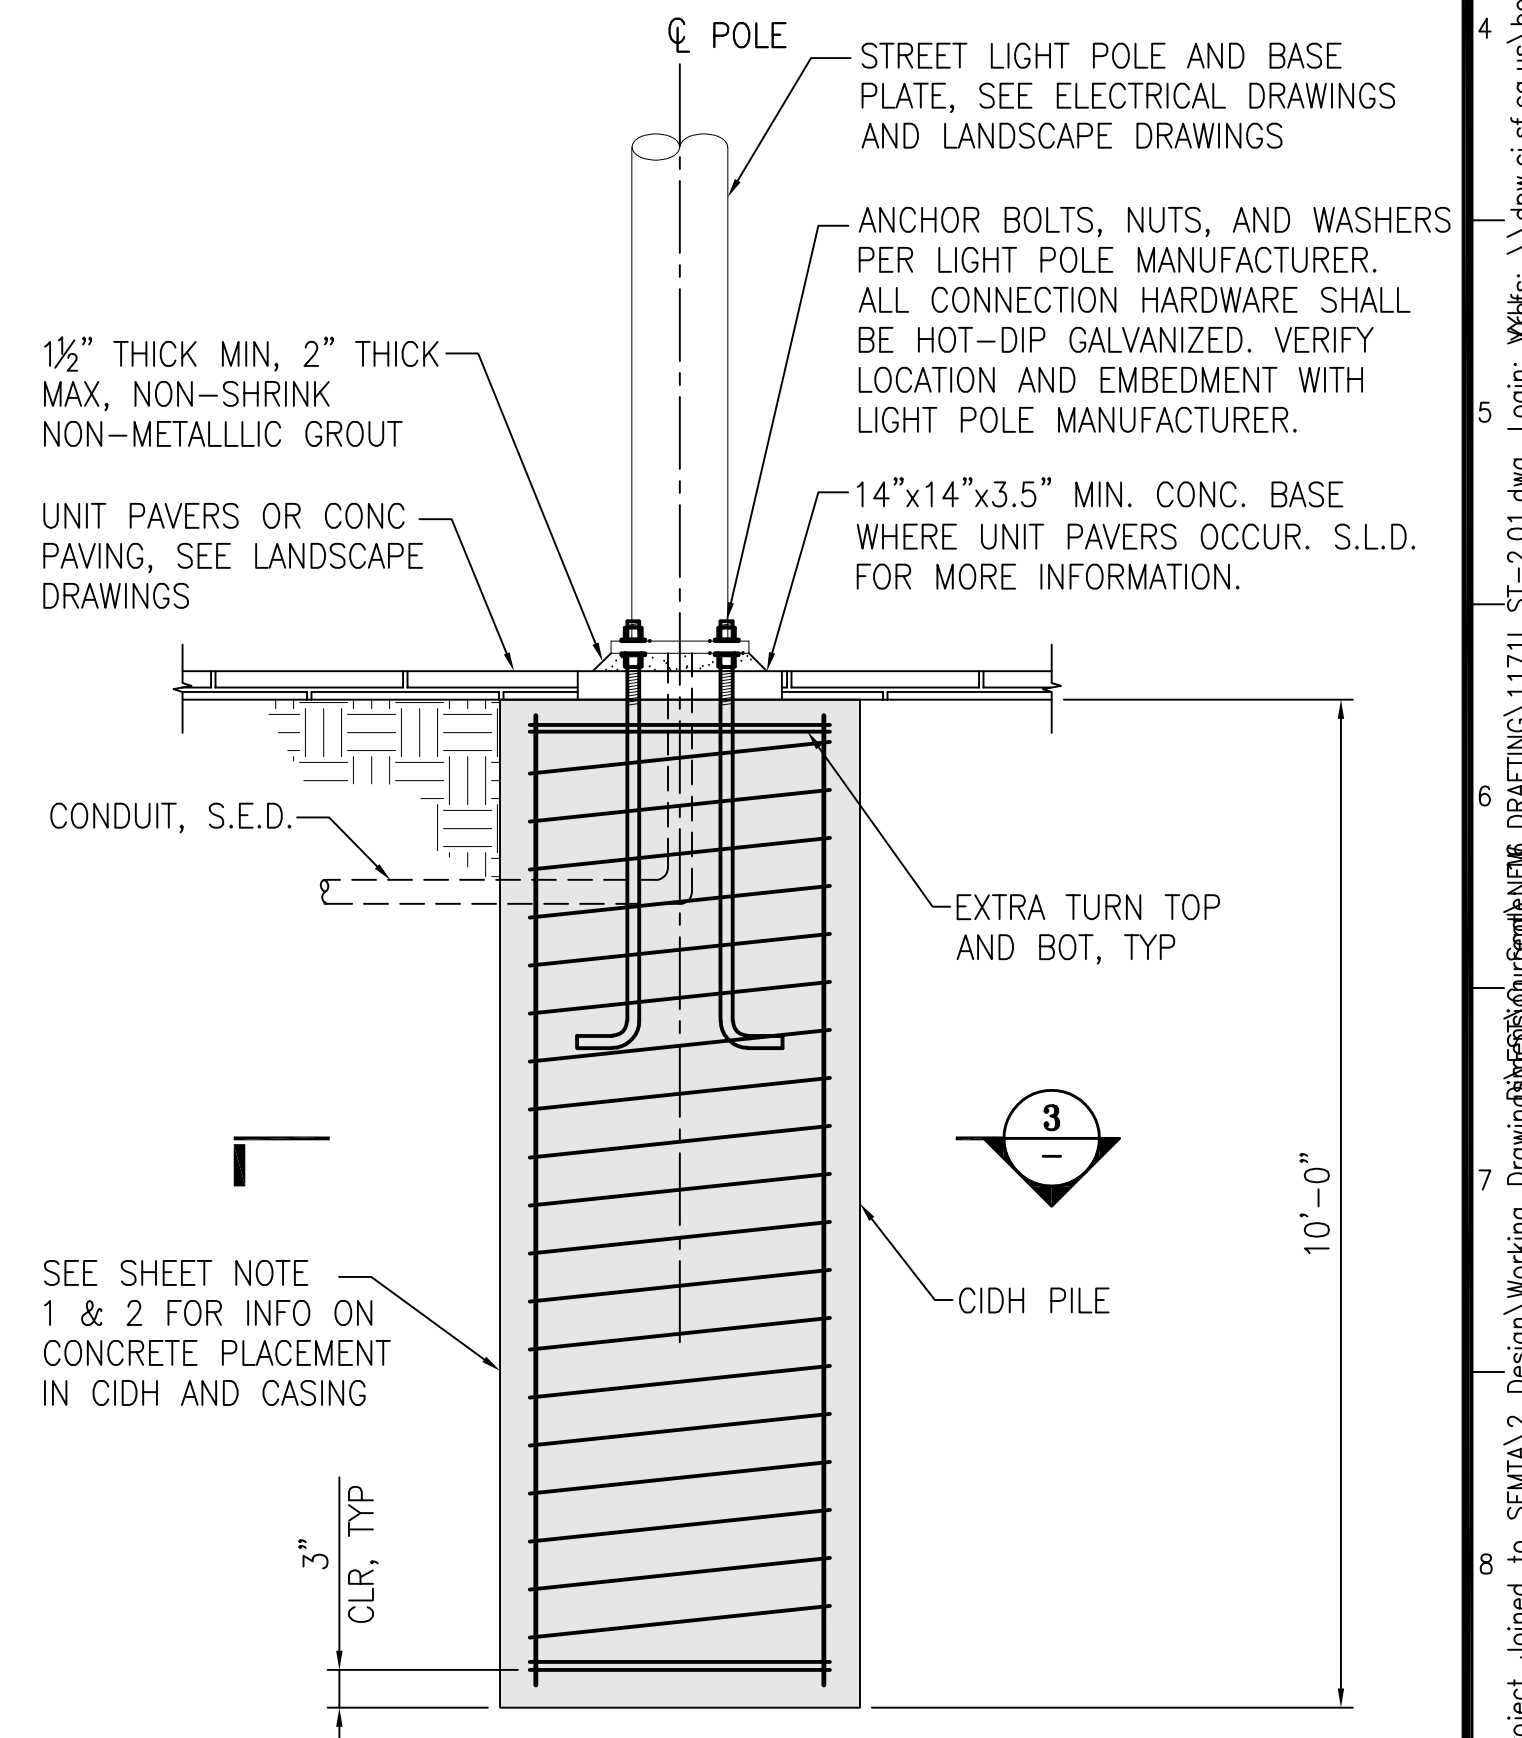
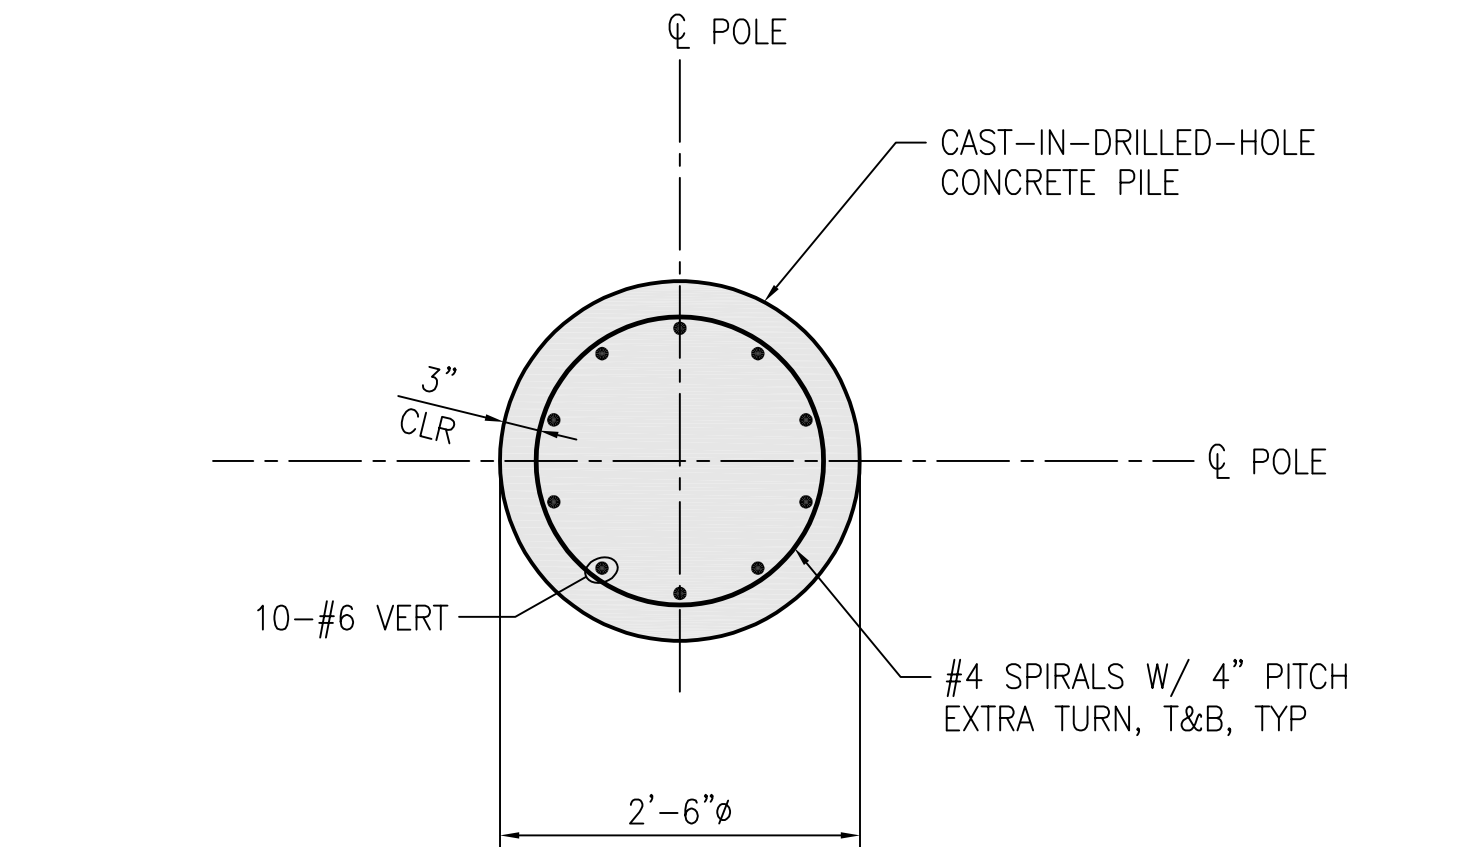


1. THE CONTRACTOR SHALL PROVIDE TEMPORARY CASINGS OR LINERS WHEN DRILLING FOR FOUNDATIONS IN THIS PROJECT UNLESS OTHERWISE NOTED BY THE GEOTECHNICAL ENGINEER OF RECORD. TEMPORARY CASING OR LINERS SHALL BE PROVIDED WHEN DRILLING IN SAND AND SILTY SAND, AND AS REQUIRED, TO STABILIZE THE DRILLED SHAFT EXCAVATION, AND TO FORM THE UPPER 2 FEET OF THE LIGHT POLE FOUNDATION. THE TEMPORARY CASING OR LINER SHALL BE REMOVED AFTER CONCRETE PLACEMENT EXCEPT THAT CORRUGATED STEEL METAL CASING IS ALLOWED TO REMAIN IN PLACE.
2. DEPOSIT CONCRETE AS NEAR AS PRACTICABLE TO ITS FINAL POSITION IN THE PLACEMENT IN A MANNER THAT DOES NOT CAUSE SEGREGATION. USE OF ELEPHANT TRUNK OR CONCRETE PUMP HOSE MAY BE REQUIRED.

[illegible]