



Layer	Name	Material	Thickness	Constant	Board Layer Stack
1	Top Paste				
2	Top Overlay				
3	Top Solder	Solder Resist	0.40mil	3.5	
4	Top	Copper	1.38mil		
5	Dielectric 1	FR-4	59.05mil	4.8	
6	PWR	Copper	1.42mil		
7	Dielectric 4		5.00mil	4.2	
8	GND	Copper	1.42mil		
9	Dielectric 2		10.00mil	4.2	
10	Bottom	Copper	1.38mil		
11	Bottom Solder	Solder Resist	0.40mil	3.5	
12	Bottom Overlay				
13	Bottom Paste				

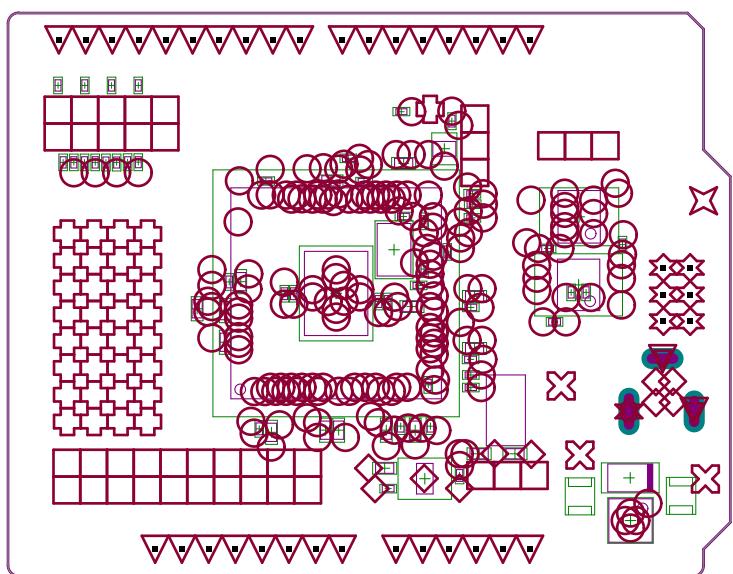

Symbol	Hit Count	Finished Hole Size	Plated	Hole Type	Physical Length	Rout Path Length
✿	1	39.37mil (1.000mm)	PTH	Slot	137.80mil (3.500mm)	98.43mil (2.500mm)
▼	2	39.37mil (1.000mm)	PTH	Slot		118.11mil (3.000mm)
○	188	10.00mil (0.254mm)	PTH	Round		
◊	10	16.00mil (0.406mm)	PTH	Round		
☒	3	28.00mil (0.711mm)	PTH	Round		
▽	32	34.00mil (0.864mm)	PTH	Round		
□	39	35.43mil (0.900mm)	PTH	Round		
✿	33	35.50mil (0.902mm)	PTH	Round		
✿	6	38.00mil (0.965mm)	PTH	Round		
☒	1	126.00mil (3.200mm)	PTH	Round		
315 Total						

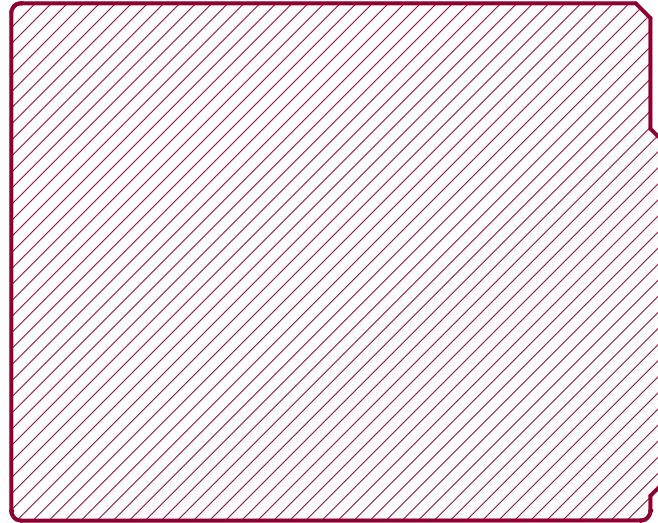