

P6 Series

Multifunctional Thermal Imaging Core Module Specification V1.0

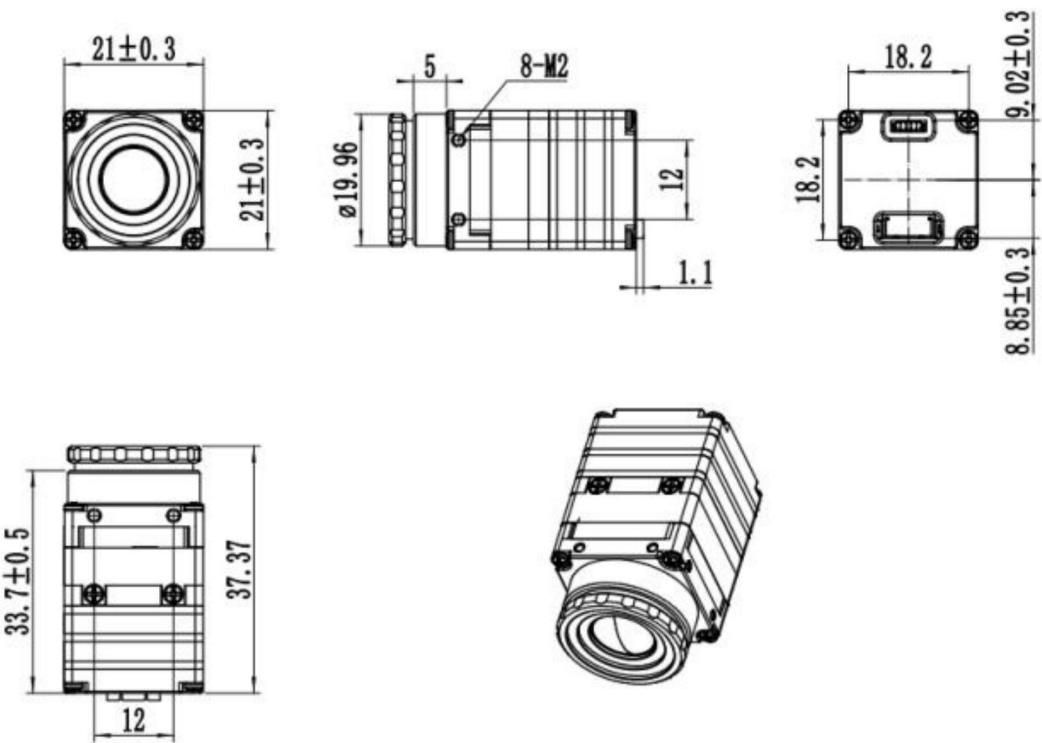


Product Model: P6-UC

Functional Specifications

Model		P6-UC-9
Lens Specifications	Focal Length (mm)	9mm
	Field of View(FOV)	46.2*37.7°
	Detection Distance	900m
	Recognition Distance	225m
	Identification Distance	113m
Detector Specifications	Detector Type	Uncooled Focal Plane Array Detector (VOx - Vanadium Oxide)
	Spectral Response	8~14um
	Pixel Pitch	12um
	Resolution	640*512(Effective FPA)
	NETD	≤35mK(f/1.0 50Hz 300K)
	Frame Rate	50Hz
Interface Specifications	Image Interface	USB (UVC)、 CVBS(PAL Format)
	Control Interface	UART (Baud Rate 115200)
	Interface Specification	SMD,P=0.8mm-4P、 SMD,P=1.25mm-5P
Function Specifications	Pseudo-color Modes	White Hot (default), Black Hot, Red Hot, Iron Red
	Image Enhancement Mode	Adjustable
	Image Noise Reduction	Adjustable
	Brightness	Adjustable
	Contrast	Adjustable
	Digital Zoom	1X–4X zoom, step 0.1
	Shutter Mode	With Shutter, Auto Shutter mode
	Lid Calibration	Supports PC software
	Non-Uniformity Correction (NUC)	Supports PC software
Physical Characteristics	Power Supply Input	USB(5V)、 CVBS (4.5-18V)
	Operating Temperature	-40°c~+60°c
	Power Consumption	≤0.5W (default) ≤0.5W (USB UVC)
	Shock	Vibration: Sinusoidal vibration, 10 m/s ² , 3 axes Shock: Half-sine wave, 15 g / 11 ms, 3 axes, 6 directions
	Weight	30g
	Dimension	21mm*21mm*37.3mm
	Secondary Development	Provide secondary development documentation

Dimension Specifications / Interface

Dimensions (vary by version)	 Technical drawings of the device showing dimensions: - Top view: 21±0.3 (width), 21±0.3 (height) - Side view: 5 (flange width), 8-M2 (thread), 12 (height), 1.1 (base thickness), 19.96 (total height) - Front view: 18.2 (width), 18.2 (height), 9.02±0.3 (top flange height), 8.85±0.3 (bottom flange height) - Bottom view: 33.7±0.5 (width), 37.37 (height), 12 (base width) Isometric view of the device.												
Interface Definition	 Photograph of the device showing the interface labels: - USB - PIN1 - PIN4 - PIN1 - PIN5 - CVBS <table><tr><td>4pin/0.8 terminal/USB</td><td>5pin/1.25 terminal/CVBS</td></tr><tr><td>1:VCC</td><td>1:RX</td></tr><tr><td>2: GND</td><td>2:TX</td></tr><tr><td>2: DP</td><td>3:CVBS</td></tr><tr><td>3: DM</td><td>4:GND</td></tr><tr><td></td><td>5:4.5-18V</td></tr></table>	4pin/0.8 terminal/USB	5pin/1.25 terminal/CVBS	1:VCC	1:RX	2: GND	2:TX	2: DP	3:CVBS	3: DM	4:GND		5:4.5-18V
4pin/0.8 terminal/USB	5pin/1.25 terminal/CVBS												
1:VCC	1:RX												
2: GND	2:TX												
2: DP	3:CVBS												
3: DM	4:GND												
	5:4.5-18V												