

Preface

Traffic volumes are exploding in the data center due to the increasing efficiency and density of highly virtualized cloud computing infrastructures and larger, more complex data sets. A single application or storage server connected at 10Gbps can now generate bi-directional flow rates in excess of two billion packets per day with aggregate daily traffic in many cloud data centers measurable in petabytes. To handle these loads, deployments of multi-path 40Gbps Ethernet spine and leaf interconnects are becoming the norm, with price-competitive 100Gbps Ethernet connectivity on the very near horizon. In addition, work is already started on defining the 400Gbps Ethernet standards in the IEEE. Indeed, continuing increases in speed and data volumes don't appear to have any end in sight.

The challenge remains in that IT organizations have requirements to perform the following functions with increasingly higher data volumes and higher network bandwidths, while controlling or reducing costs:

- Maintain security, compliance and reporting for all traffic
- Troubleshoot applications and performance problems
- Perform traffic interception when required such as for Lawful Intercept
- Manage overall customer satisfaction and response times

Arista Data ANalyZer (DANZ) is an integrated feature set in Arista's Extensible Operating System and is currently available on Arista Networks 7150-series switches. DANZ provides a solution to monitoring and visibility challenges at 10/40Gbps and higher with unmatched price-performance and precision. DANZ functionality will be available across the majority of the Arista product line in the summer of 2013.

The Challenges of Flying Blindfolded

The challenges of examining and analyzing massive amounts of data to diagnose network problems, troubleshoot applications, assure performance and secure the modern data center are becoming insurmountable with traditional technology. In effect many IT organizations have conceded and they are "flying blindfolded" to the actual conditions in their data center environment.

Lack of visibility facing IT operations teams continues to grow with the addition of high-density server virtualization, multi-tenant cloud environments, and big data applications like Hadoop. Never before have the challenges of maintaining visibility into the inner workings of the data center network been as great as today.

Here are some examples of some of untenable problems facing network administrators:

- Existing in-place management tools and methodologies that were designed for 1Gbps networks do not meet the needs of the explosive data-volume growth, and the precision selection and identification of the important traffic for detailed fine grain analysis has become nearly impossible.
- The increasing variety in terms of number of types of data requiring monitoring (transactions, databases, files, voice, video, images, telemetry, etc.) cannot be addressed in a cost-effective model with any existing tools.
- Monitoring large amounts of traffic traversing the network from integrated access/monitoring ports or passive Test Access Points (TAPs) requires a huge investment in probes and aggregation switches to scale to current speeds. Costs of these can exceed the cost of production networks by a factor of 2-4x.
- Virtualization, mobility, and the dynamic reconfiguration of the data center environments to address these needs are making it even more difficult to secure, trace and troubleshoot traffic and applications.

Data center instrumentation must deliver more than point-in-time statistics based on outdated metrics and capture methods. Tools used to analyze and correlate data traversing today's networks need to be ultra-precise in the selection and correlation of traffic, and must be sufficiently programmable to allow operations requirements to be met in extremely dynamic and virtualized data center infrastructures. Arista is committed to delivering new and innovative methods to automatically characterize and predict network behavior, to expose low level conditions, and to provide detailed capture and accounting of traffic for forensic analysis in these cloud networks.

Solution Overview

Arista's Precision Data Analysis with DANZ is the first and only solution to deliver scalable end-to-end monitoring. Utilizing Arista EOS's extremely flexible and programmable Software Defined Cloud Networking capabilities. DANZ leverages ultra-low latency switching capabilities of Arista switches to provide single-hop packet processing and data capture with exceptional flexibility and precision. Captured data can be delivered with highly accurate timestamps, fine-grained filtering, internal congestion detection and correlation, in-switch advanced filtering and capture, and advanced load balancing in hardware -- all at line-rate and without additional hardware.

The DANZ software features give IT operations and planning departments the following capabilities:

- Aggregate, replicate and capture traffic for processing without affecting production
- Apply advanced filtering and precision time stamping at wire rate in hardware
- Monitor, capture and correlate congestion and microburst events in real time
- Deliver application layer feedback directly to applications and tools
- Integrate with any standard 3rd party API and Application/Network management tools
- Achieve all of these features in Arista's full featured switches without additional equipment

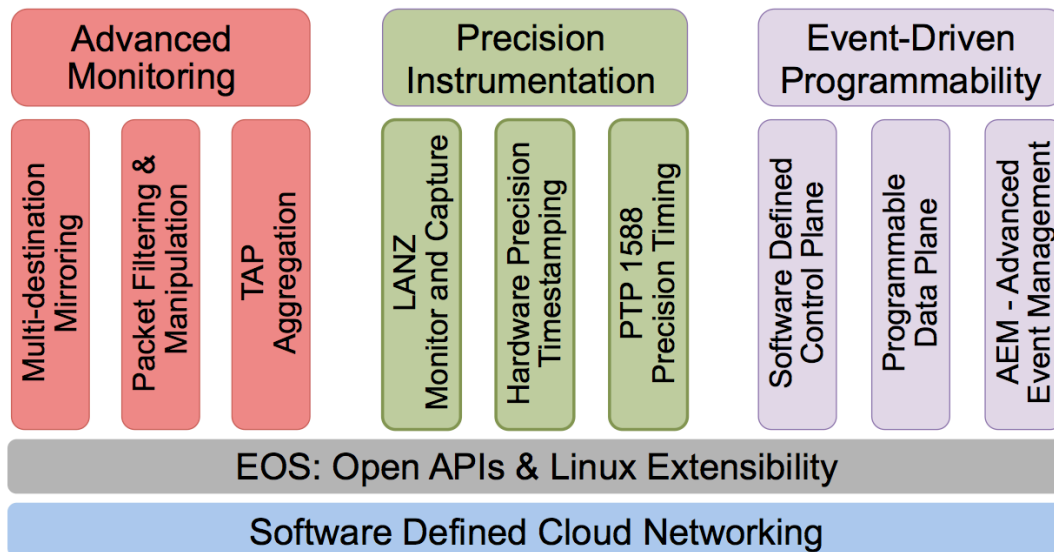


FIGURE 1. Elements of Precision Data Analysis with DANZ

In order to achieve these capabilities, there are three fundamental core capabilities provided by DANZ which include Advanced Monitoring, Precision Capture, and Event-Driven Programmability:

Advanced Monitoring: Advanced Monitoring provides a unique set of integrated functionality that operates as an adjunct to the Arista's high performance data center network at strategic monitoring points - such as in leaf and spine switches. This capability provides filtered multiport mirroring of selected production network traffic, where unique filters can be defined for traffic mirrored to a destination tool for further analysis at line rate. This feature also leverages advanced load-sharing functionality provided by Arista hardware to assure each flow is consistently redirected to the same destination tool with perfect symmetry and reliability.

Advanced monitoring delivers integrated TAP and mirror source aggregation for any mirrored or captured traffic arriving from passive capture devices, such as passive optical TAPs or existing switch mirror ports. With the capability to filter, modify and timestamp each individual packet at line rate in hardware at nanosecond accuracy it provides the extreme precision required for network analysis at multi-gigabit speeds.

Advanced monitoring also provides features like line-rate packet truncation, to allow IT departments to leverage their currently installed analysis tools and to enable detailed forensic analysis of recorded traffic at any location. In combination, these features can dramatically reduce the complexity and cost of positioning network and application analysis and security tools at every location and conforming to the dynamic cloud network requirements and scale of modern infrastructures.

Precision Instrumentation: Precision Instrumentations delivers enhancements to the current Latency ANalyZer (LANZ) feature in Arista switches and adds precision timing services for both LANZ and port mirroring, with the addition of deeper inspection of congestion events and precision time correlation of events with advanced monitoring. These services allow microbursts and other congestion related events to be captured and recorded in real time.

LANZ provides early warning and fine grain reporting of transient congestion events and microbursts that occur under bursty or heavily loaded conditions, even when traffic loads are not saturating links. It achieves this functionality through the use of hardware-triggered events that report real time queue depths at peak loads, along with start and end points of the congestion event, any resulting packet loss, and identification of devices and applications affected by the congestion.

With absolute precision and accurate system clocking, LANZ provides the ability to export this information utilizing an open streaming protocol for real-time external capture of data with precision timestamps included. Captured network load data can be correlated with mirrored and monitored traffic with simple post-processing in any capture platform or monitoring tool to identify which applications are causing congestion. Network operators can see exactly what was happening in the network when monitored traffic traversed through each individual switch and can pinpoint hotspots that are causing problems with greater precision than ever before.

Arista's timing services work with these features to assure reliability of timestamps to within 10ns through a high precision internal clock and optional external time sources that use the PTPv2 standard. With external GPS-based time sources the precision of Arista capture and analysis capabilities can be maintained, even for multi-data center networks and hybrid cloud infrastructures that span hundreds of thousands of miles.

Another unique feature of the LANZ functionality is the ability to detect congestion on the outgoing tool ports for switches that are aggregating mirrored or TAP traffic to analysis tools, thus identifying when analysis tools are losing visibility. It allows operators to perform appropriate actions based upon tool congestion, ensuring that 100% of captured traffic reaches the analysis tools and assuring the fidelity of information that the tools provide. Leveraging the Precision Timing capability of LANZ allows IT operators to proactively profile their network and applications, looking for network hot spots before critical business applications are impacted.

Event-Driven Programmability: Event-Driven Programmability in Arista EOS enhances the ability to sense, diagnose, react to and solve problems within the network through custom generated programming of the network infrastructure before the end user or application is negatively impacted. Arista EOS was designed for integration with these kinds of SDN services through it's implementation around a stable, open source Linux core with a central state-oriented database that makes EOS inherently self-healing, programmable, in-service upgradeable and extremely robust.

Embedded event-based functionality provided by Advanced Event Management (AEM) enables the network operator to detect system events and perform pre-defined software actions whenever that event occurs. Leveraging the programmability of Arista EOS's open APIs and the extensibility of it's standard Fedora Linux environment gives the IT operations team tremendous advantage in their ability to orchestrate and react to problems quickly without any human intervention.

Benefits of Precision Data Analysis with DANZ

Together, DANZ's advanced capabilities allow Arista customers to analyze, troubleshoot, manage and maintain their data center networks securely and reliably. Arista allows technology alliance partners to integrate with the most efficient and scalable network monitoring platform available. Some of the key benefits of this solution to customers are listed below:

- **Performance:** to offload compute-intensive processing from monitoring tools and to allow them to scale to 40/100Gbps and beyond, with zero impact on performance and scalability of the production network.
- **Efficiency:** provide end-to-end visibility and uninterrupted access to network traffic without the need to invest in new equipment, training, and methodologies.
- **Precision:** providing seamless integration of reporting and traffic capture with wire-rate inline packet time-stamping and clock synchronization between network infrastructures and management tools and precise data selection criteria for examination and recording of targeted traffic.
- **Extensibility:** unified and extensible architecture fully meshed with the operating network, cloud and virtualization infrastructure, and designed to allow monitoring and analysis tools to scale to multi-terabit scale and beyond.

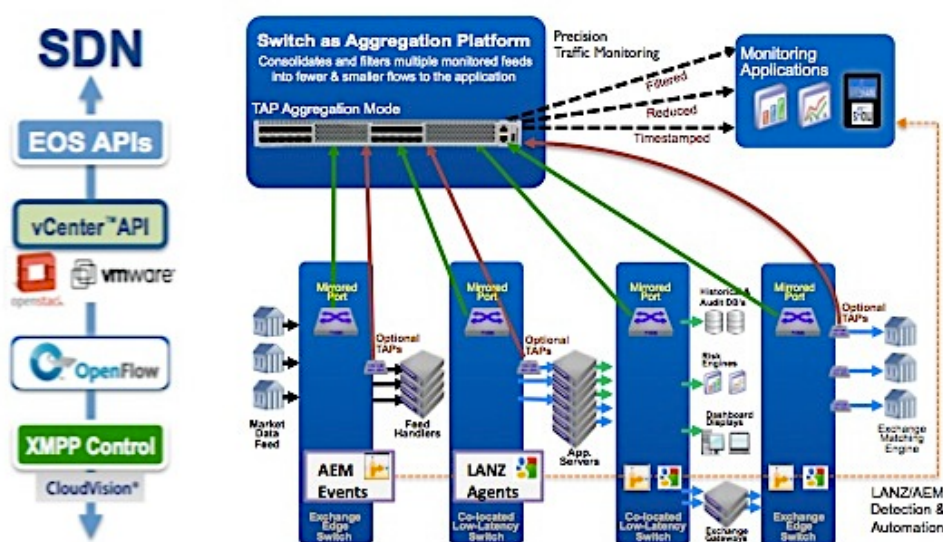


Figure 2. Arista DANZ Integrated Precision Monitoring Infrastructure

Applying Advanced Monitoring for Network Traffic

In many IT networks there is a need to copy traffic to a number of different tools for either real-time or forensic analysis. Multiple monitoring applications or tools may be necessary to deliver functions such as intrusion detection, traffic recording, auditing, compliance, troubleshooting, lawful intercept, and data security.

As the modern data center network grows it becomes cost prohibitive to scale-out the number of analysis tools to mirror the volume and number of sources. However the same analysis tools must often be scaled-up, or stacked, to match the capacity requirements of higher speed networks. To economically address the critical monitoring requirements of modern data center networks traffic must be selectively analyzed with minimal overhead and minimum cost before delivery to analysis tools. Important actions such as steering traffic reliably to the appropriate analysis tool, granular filtering of traffic, detecting and correlating events, and distribution or load balancing to multiple tool types is required.

Multi-destination Mirroring

Arista's multi-destination mirroring feature in its leaf and spine switch designs allows traffic from a single source to be replicated to multiple output ports with symmetrical load balancing, thus reducing the number of capture devices and probes needed within the network, and scaling the performance of probes designed for slower 1Gbps network connections to the needs of modern high performance data center speeds of 10/40 and 100Gbps. Conversely, as a result of intelligent filtering, timestamping and load sharing criteria that can be applied at the ingress to the network. Traffic arriving at multiple ports can be reduced and aggregated to a single tool for

detailed analysis and correlation of important events without the addition of proprietary backhaul fabrics and active monitoring TAPs.

Unlike older SPAN or port-mirroring technology, multi-destination mirroring in Arista's switches can scale to any dimension required in the data center network, and it is not limited to the number of ports designated for exclusive use as mirroring outputs on a switch, resulting in flexible software defined monitoring capabilities and subsequently reducing monitoring cost and increasing capabilities throughout the network.

Packet Filtering and Manipulation

Wire-rate packet filtering and manipulation in hardware allows Arista switches to redirect traffic to any destination with precision granularity based on L2-4 information including MAC Source/Destination Address, VLAN ID, Ethertype, IP Protocol, DSCP/TOS traffic class or priority, IP Source/Destination Address, UDP/TCP Port or Multicast Address, and arbitrary offset byte values within the packet. Packets can be re-written at line rate appended with new timestamp and checksum information, tagged for identification of source by analysis tools, and forwarded to physical or virtual network appliances over any network media.

Packet-filtering and manipulation in hardware enables very granular selection of mirrored traffic at line rate without addition of new hardware or loss of performance for production traffic. This enables the use of the existing tooling infrastructure by restricting the tool visibility to only interesting traffic at appropriate rates for the individual tool. Should the IT operations team wish to further enhance the scalability of the analysis tools packet manipulation provides the ability to truncate packets to deliver just the limited information necessary to diagnose a problem. Reducing the amount of data that is passed to the analysis tools enables even greater scale.

Mirroring Traffic Directly to EOS

Given that the reach of analysis tools is never 100%, there are instances where local analysis needs to take place on the network without ready access to any tools. There are also situations internal to a network switch where visualization into the control plane traffic is useful in troubleshooting an issue. The Mirror Direct to EOS feature in multi-destination mirroring provides a solution for both of these instances.

Local storage of mirrored data could include a local flash or SSD drive in the Arista switch, or a remote mount point. The resulting local control and data plane visibility can act as an actionable trigger for taking a programmed action through AEM or other mechanisms. When a condition requiring action is detected, the event manager can execute an EOS command or script to perform an action prior to degradation taking place and potential impact to the user experience. Alternatively an application can notify the administrator through a variety of mechanisms.

Integration of Analytic and Diagnostic Tools within EOS

Integrating applications directly with EOS allows customers the ability to run common cloud infrastructure automation applications such as Chef, Puppet or CFEngine for enhanced traffic analysis and visibility. Some tools that Arista customers currently use in EOS include Splunk connectors, sFlow analyzers, WireShark, Nagios, Ganglia, Ostinato, Cacti, and Tcpdump among others.

Local processing of mirrored traffic in the switch CPU can perform a valuable function and will not degrade the performance or operation of the switch, in part due to the robust nature of the EOS architecture. Utilizing standard Linux analysis tools integral to EOS such as Tcpdump or other open source monitoring services, a customer can select control plane or data plane traffic to mirror to the local memory on the Arista device for local analysis.

The powerful multi-core x86 Xeon-class supervisory CPU with multi-gigabyte core memory, combined with Arista's EOS software architecture, enables virtually any application to be run on the switch platform itself, and assures isolation from critical network functions with full access to a rich set of EOS services and data.

TAP Aggregation

Arista's 7150-series product line delivers additional advanced monitoring capabilities through the delivery of TAP and mirror-source aggregation functionality. This TAP aggregation capability provides a familiar industry-standard CLI interface and EOS API with a distributed switching architecture for aggregating any-to-any mirroring of traffic captured at passive and embedded network interfaces at line rate, with precision hardware time stamping

accuracy at the capture point, at current interface speeds up to 40Gbps. Where large numbers of mirrored ports need to be aggregated to tools farms, or traffic needs to be monitored from network equipment unable to provide precision timestamping or filtering natively, Arista TAP aggregation provides the same high degree of precision and advanced features as multi-destination mirroring at a fraction of the cost of currently available proprietary TAP aggregation fabrics.

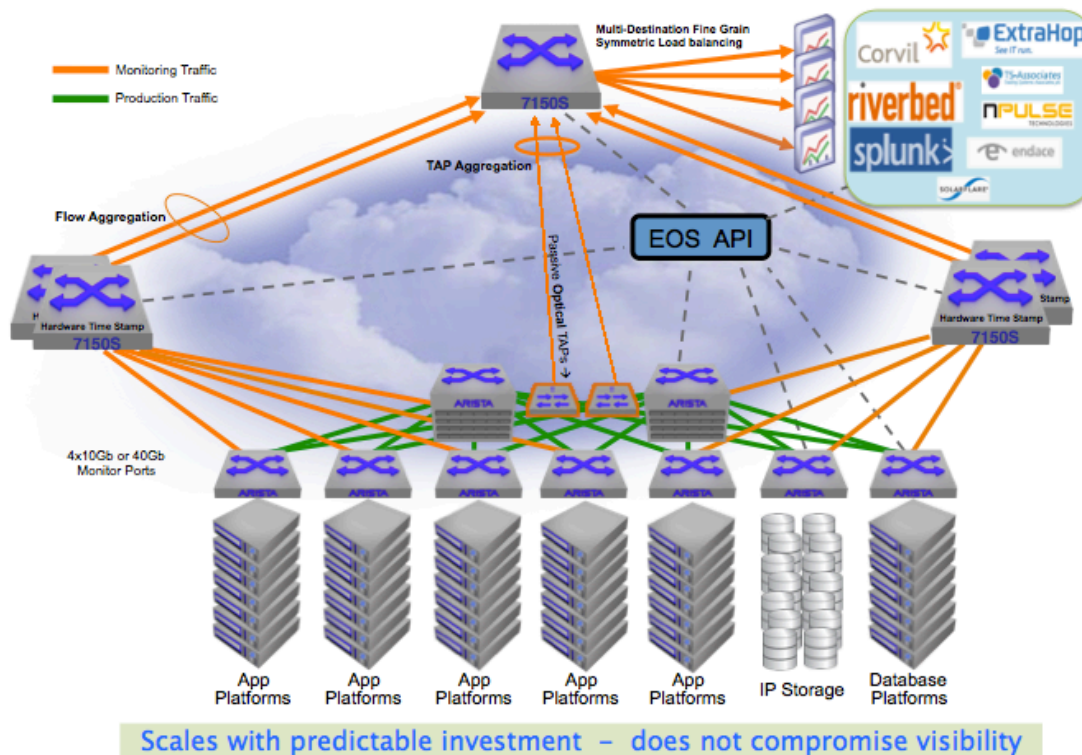


Figure 3. Large Scale TAP Aggregation Deployment

The Arista 7150-series switches aggregate many sources of data to fewer tool ports to enable Network Performance Monitoring (NPM) and Application Performance Management (APM) solutions to scale to handle the unprecedented volume of data traversing today's datacenters. Large IDS clusters can be built using TAP aggregation to scale-up racks of open-source tools such as BroIDS, Suricata, or Snort to meet the needs of multiple 100Gbps environments. In addition a number of commercial NPM and APM tools (see figure 3), have already begun to leverage Arista's TAP Aggregation and DANZ feature set to extend their value and scalability.

TAP aggregation can also fan-out traffic from single monitored sources to multiple analysis or recording tools to allow existing tools that were designed for 1Gbps sources to scale to 10-100Gbps network needs, and to extend the port reach of individual tools to many potential capture points across a dynamic network infrastructure.

Intelligent Load Balancing

As discussed above, most IT organizations have an installed base of 1Gbps or 10Gbps tools for network analysis. With the increase in interconnect speeds approaching 100Gbps, these slower tools are greatly impaired from performing deep analysis without significant filtering of data. The complexity of this data filtering and steering can lead to missed vulnerabilities, inaccurate compliance findings, and elongated troubleshooting efforts. Arista's Intelligent Load Balancing feature can provide relief from these challenges. Utilizing the Arista 7150-series switch, traffic can be intelligently load balanced across multiple lower speed ports to achieve visibility into the higher-speed interconnects. For instance a 40Gbps source port can now be mirrored equally across 4x10Gbps ports to 4x10Gbps analyzers. This enables the customers to build on their existing investment in tools.

In order to perform comprehensive analysis, both sides of the host-to-host conversation are necessary. Whereas the ability to hash information from a higher-speed port to lower speed ports is useful in the case of a single analyzer with multiple ports, having both sides of the conversation going to one tool is essential when hashing traffic across multiple tools. To overcome this challenge the destination load balancing feature provides the capability for symmetrical hashing where the send and receive traffic in a single conversation will always be placed on the same mirror destination port on the Arista switch. This capability greatly reduces the need to spend significant dollars on larger tools with more ports in a single tool, and extends the reach of tools to the entire data center network. In essence, this provides for massive scale in the monitoring environment without compromising visibility of the traffic or increasing expense.

Applying Precision Instrumentation for Detecting Network Conditions

In alignment with the features introduced in Advanced Monitoring, Arista has extended precision timing and filtering to deliver better precision for latency, congestion and packet loss event detection and reporting with less variability and no increase in complexity of introduction of new equipment.

LANZ Monitoring and Capture

While often overlooked, all networks experience internal congestion regardless of levels of oversubscription and utilization. LANZ is Arista's Latency Analyzer feature for monitoring congestion and microburst conditions within the network. LANZ captures information necessary to understand the effect of internal congestion in the network, while time stamping for LANZ data enables precision alignment and correlation of internal congestion events with traffic captured for analysis and performance management using Advance Monitoring. LANZ provides logging and notification of start, end and peak congestion events - even when events exist for only a few nanoseconds.

LANZ provides reliable nanosecond-accurate reporting for flows by source, destination, traffic-class or duration, and it can either log precision timing information of those flows or it can stream data to a remote application for correlation with other information, such as captured traffic. Traffic experiencing congestion can be sampled and forwarded for further analysis by an analysis tool to enable precision fine-grained identification of impacted applications and users.

In addition LANZ provides accurate drop counts for correlation of potential buffer overruns, and LANZ events can be integrated with syslog, AEM triggers, and CLI for ultra-precise high fidelity visibility into how applications are performing 'inside the network'.

LANZ for Transaction Latency Management

Fine grain congestion measurement and microburst detection is important to understand in order to determine how interaction of application flows and network capacity are impacting transaction-oriented service delivery. LANZ provides ultra-high resolution fine grain notification of internal network latency, congestion and packet loss events to external analyzers for microburst detection, latency analysis and mitigation of performance issues. LANZ also provides information needed to derive queue drain times which identifies potential influence of various queue configurations on latency sensitive applications.

LANZ enable architects, engineers and operators of ultra low latency data center, financial, and cloud infrastructures to analyze, evaluate, manage and tune their environment for latency sensitive transactions. Such analysis enables IT organizations to pinpoint and eliminate causes of communications delays, resulting in faster and more accurate transaction cycles.

Hardware Precision Timestamping

Time stamping is the act of adding fields to a packet to indicate the time at which the packet was received at the device. Traditionally network analyzers add time-stamps as they receive copies of traffic from SPAN or mirror ports on networks devices. This mechanism is inherently inaccurate because there may be tiers of devices between the analyzer and the traffic source – the analyzer has no way to understand how much additional delay these intermediate devices and infrastructure have introduced. Adding a time-stamp at the source is the only way to ensure every packet is accurately marked and the analyzer itself has an entirely accurate view of when the traffic was captured.

With DANZ, ingress hardware timestamps can be created on every packet and event providing recording accuracy to within a few nanoseconds. Network analysis tools used to assist with troubleshooting performance or security issues can then utilize these timestamps for out-of-band analysis and post processing, or to correlate important events.

Precision time recording and time stamping enables correlation of traffic capture and microburst events for end-to-end identification of network and application performance issues. Traditional monitoring platforms require in-line packet rewrite and insertion of time correlation bits to indicate when traffic traversed sample points in the network. Arista's efficient precision time recording algorithm inserts minimal required timing information in exported packets, which allows precision time correlation using simple analytical tools, without expensive and complicated processing and time stamping infrastructure.

Integrated Precision Time-base Services - PTP 1588 Precision Timing

Supporting the industry leading PTPv2 timing standard (i.e., IEEE 1588 version 2) Arista 7150 series switches precisely synchronize time for services running within the switch, and for services and applications outside the switch that depend upon nanosecond time resolution. The Arista 7150 series switches deliver robust PTP functionality in a data center class Ethernet switching platform for the first time, and offer complete hardware support for PTP boundary and transparent clock functions.

Arista's time-base services assure reliability and alignment of timestamps through a highly stable internal clock, and external time sources that use the PTPv2 standard. With external GPS-based time sources the precision of Arista capture and analysis capabilities can be maintained, even for multi-data center networks that span hundreds or thousands of miles.

These capabilities unlock the limits on the scale and precision of PTP implementations that no longer require dedicated PTP hardware at every point and provide a common infrastructure for both data forwarding and time synchronization. Equally important, the boundary and transparent clock functions allow densely virtualized, cloud and multi-tenant infrastructures to scale precision timing services consistently at a tremendous cost savings.

Arista's precision timing service enables out-of-band network analysis to occur in any location, away from the switch that is supporting the production requirements. Timing Precision is the key to correlation of end-to-end network events that occur at multi-gigabit speeds. This allows dramatic improvements in operational efficiency and the ability to monitor complex network and application conditions including congestion, packet loss, latency, and jitter with little or no additional investment in equipment, training, or services. Furthermore, by providing these services natively in the Arista platform the addition of additional time synchronization servers may be avoided.

Applying Event-Driven Programmability in EOS

In the highly dynamic data center environment conditions can change in a microsecond. Resources are remapped, virtual machines move to new hardware, and tenant configurations are changed without considering the impact on other users or on business critical applications. Reacting to events through the course of normal human intervention is impossible where changes happen at increasing speeds and with greater frequency. Once an issue is known, troubleshooting and the associated reaction times can lead to hours of delay before services are restored -- resulting in lost revenue, substantial damage to a company's reputation, staff morale downturn, and loss of customer loyalty and trust. These losses can be substantial and are completely unnecessary.

Through the ability to integrate event-driven programmability with its programmable control and data plane architectures, Arista EOS enables proactive resolution of network issues before they impact applications and provides the ability to couple analysis applications and tools with the rich internal visibility and monitoring capabilities of DANZ.

Advanced Event Management (AEM) allows pre-programmed actions to execute in response to various triggers. For example, detection of vMotion events allows monitoring and analysis applications to track dynamic changes in a cloud or virtualized network infrastructure. Virtualized resources can be monitored based on resource names,

instead of network addresses, and changes can be fully automated between the monitoring infrastructure and the network.

Software Defined Control Plane

The decoupling of data-plane forwarding from control-plane topology control in Arista's EOS architecture provides the ability to integrate with a variety of software-defined cloud network scenarios. EOS's software friendly control plane provides the basis for DANZ to form part of an automated feedback loop for advanced analytical and network control applications, allowing operations requirements to be met in extremely dynamic and virtualized data center infrastructures.

The Arista EOS naturally open, standards based control plane architecture provides the ability to integrate with a variety of software-defined network control scenarios – both external control-plane mechanisms such as OpenFlow and other SDN programming models including EOS RESTful API's, Cloudvision™ with XMPP, VMware vCenter APIs, OpenStack APIs, and other virtualization frameworks.

Arista's software defined control plane provides the basis for highly automated workflows that co-ordinate multiple infrastructure elements, for example:

- Coupling dynamic reconfiguration of proactive network monitoring with precision instrumentation and analysis for automated collection of forensic data pertaining to congestion or service outages.
- Providing network-wide intrusion detection via sFlow analysis with dynamic application of remediation policy, traffic steering and data capture through EOS APIs and programmatic manipulation of the control plane.

Programmable Hardware Data Plane

Hardware data-path programmability is critical for fine-grain manipulation and forwarding of packets without impacting network performance or reliability. Based upon the advanced hardware programmability of Arista's 10/40Gbps switches this flexible packet processing can eliminate the need to build expensive and proprietary network monitoring fabrics.

Advanced data-plane programmability features such as deep packet inspection and manipulation are the natural partner for SDN devices. Arista's 7150-series switches leverage the latest generation of high-performance full custom silicon with microcode programmability, to allow new methods of inspecting, manipulating and filtering traffic in hardware at each ingress or egress switching port. The unique ability to deploy soft-logic directly into switching ASICs provides major benefits in terms of:

- Deployment of new low-level protocols in hardware without requiring a forklift upgrade
- Updates to emerging technology implementations to support network virtualization (e.g. VXLAN)
- Application of complex packet processing logic (e.g. Address Translation, Advanced Mirroring, Time-stamping)

Arista's fully programmable data-plane capability is critical for fine-grain filtering, manipulation and forwarding of packets without impacting network performance or reliability, and it is unique to Arista's implementation of software based control functions in multi-gigabit switching hardware. The added value of data-plane processing logic developed by Arista Networks assures that the resulting systems are more flexible toward future protocol development than fixed single-vendor ASIC designs. Arista's approach results in flexible provisioning for advanced packet processing capabilities that can be extended with future software updates, and can replace expensive dedicated network packet brokers with standard Ethernet switches -- dramatically reducing the cost and complexity of performing these functions.

Advanced Event Management Services with AEM

Advanced Event Management (AEM) is a powerful and flexible tool to automate provisioning tasks and customize the overall data center operational infrastructure. AEM allows data center operators to automate responses to common problems - reacting to events, starting processes, tracking services to dynamic resources, maximizing uptime, and triggering the collection of performance statistics and monitoring data.

AEM events, triggers and actions help to bring simplicity to network operations, enabling a transition to an event-driven service model for IT operations. AEM allows operators to fully utilize the intelligence within EOS to respond to real-time events, automate routine tasks, and take local automated actions based on real-time network conditions for improved network performance.

New features in AEM linked to DANZ include more triggers and actions that can be performed such as initiating tool targeting and capture in combination with virtualization services that detect, for example, when a Virtual Machine is moved, added, or changed in a dense virtualization cluster.

AEM's Event Monitor service is a unique feature that takes this capability further, by collecting and storing critical information about the state of the network (e.g., ARP, MAC and route tables) to allow network operators to determine precisely what state the network was in at the exact time of the problem, and what led to that condition, instead of waiting for the problem to re-occur so that it can be examined after the fact.

AEM provides a significant advantage to NOC engineers monitoring the health of the multilayer network infrastructure and it's attached application servers, moving them away from a static view of network conditions and enabling them to automate responses to changing conditions that require immediate attention. AEM works in concert with other EOS features and capabilities to enable event-driven automation across the entire network.

Comparing Alternative Approaches

While Arista's solution takes a significant leap forward from the proprietary monitoring fabrics and static network probe offerings it enhances, it remains fully compatible with elements from each of these approaches. For example, a modern implementation of the Arista DANZ solution may significantly reduce the deployment cost for multi-vendor network probe infrastructures and improve the ability of these solutions to scale up to multi-terabit capacities. Arista's DANZ solution can work in concert with:

- Traditional SPAN ports without advanced filtering (including SPAN ports on other vendors equipment)
- Encapsulated In-band traffic forwarding over production networks (RSPAN, or ERSPAN)
- Dedicated parallel or backhaul monitoring fabrics (with TAPs and TAP aggregation switches)

In addition, the inherent lack of precision in the above approaches (due to the lack of cost-effective timing support), and the induced variability of monitoring results caused by a total absence of in-path analysis capabilities can be overcome in many instances by judicious introduction of DANZ-enabled switches into these environments, extending the life and scalability of many monitoring and analysis solutions and the production networks that they support.

Summary

Arista Networks believes that the key to sustainability of high performance environments is fully realized with Precision Data Analysis with DANZ. This solution provides powerful network analysis without the need for costly hardware upgrades or proprietary network analysis modules and external monitoring fabrics.

Arista's DANZ features deliver key business benefits including

- Better visibility into network and application performance, security, and compliance
- Dramatic CAPEX savings due to consolidation of production and monitoring networks
- Significant OPEX savings due to cloud automation and event-driven programmability

Arista Networks delivers a portfolio of 10/40 and 100Gbps capable Cloud Networking platforms that redefine network architectures, bring extensibility and automation to networking. Arista dramatically changes the price/performance of data center network deployments. At the core of Arista's platform is the Extensible Operating System (EOS™), a groundbreaking programmable network operating system with single-image consistency across all of Arista's hardware platforms. EOS delivers a modern network architecture for the data center, enabling non-stop availability and unprecedented application visibility.

Arista EOS provides innovative solutions to gain visibility into network traffic and provides scalable data monitoring, analysis and reporting without the expense of complex and proprietary monitoring fabrics. This paper describes the elements of Precision Data Analysis, which have been embedded in high-performance switching platforms for the first time with Arista's EOS-based gigabit network switches that offer Data Analyzer (DANZ), an integrated feature set for precision traffic selection, capture, and analysis in any data center environment.

Information in this document is provided in connection with Arista Networks products. For more information, visit us at <http://www.aristanetworks.com>, or contact us at sales@aristanetworks.com