



Power

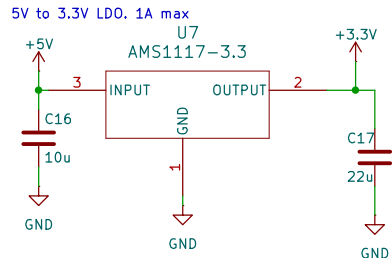


5V + CAN from Midplate (Power Distribution)




Extra Power Pins



Raspberry Pi 4 40 Pin Header Connections

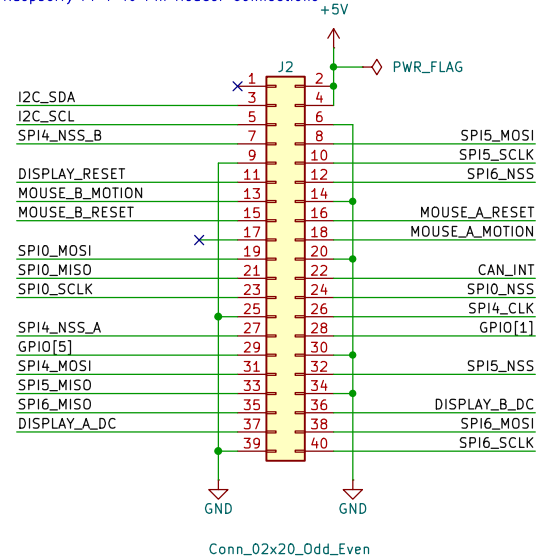


GC9A Displays




Mounting Holes for Shell + Camera



Mouse Sensor Connectors

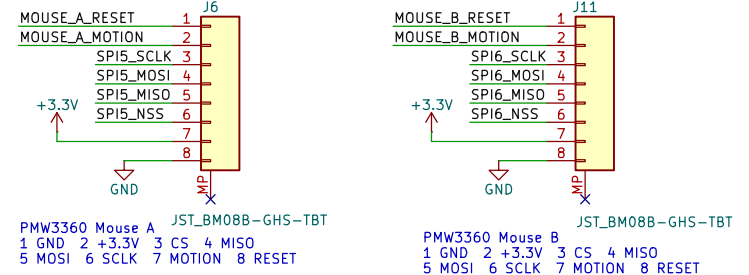

IMU Connector (Adafruit 4438 or LSM6DSOX)




STEMMA QT / Qwiic

1 GND 2 +3.3V 3 SDA 4 SCL


All 4 connectors are wired in parallel on the shared I2C bus.

J2 pin 3 = SDA, J2 pin 5 = SCL.


Extra I2C Connectors for Sensors



CAN Bus Connections

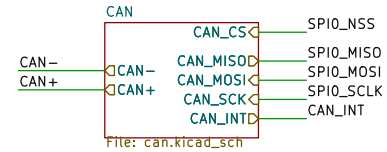

Extra GPIO Headers



The Bots

Sheet: /

File: FacePlate.kicad_sch

Title: Faceplate





Size: A4

Date: 2024-02-04

KiCad E.D.A. 10.0.0

Rev: V1.0

Id: 1/3

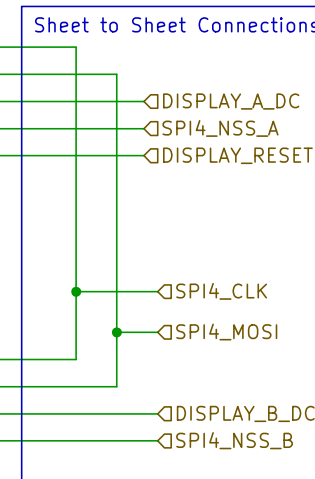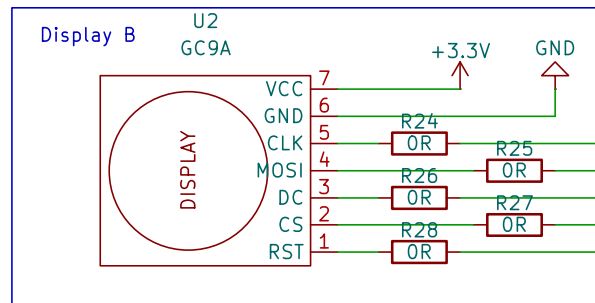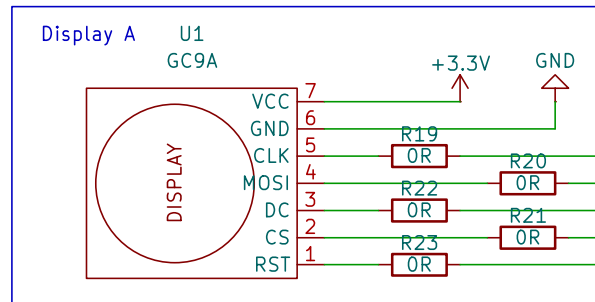

Sheet: /Display/
File: display.kicad_sch

Size: A5	Date: 2024-02-04
----------	------------------

Rev: V1.0

Id: 2/3

