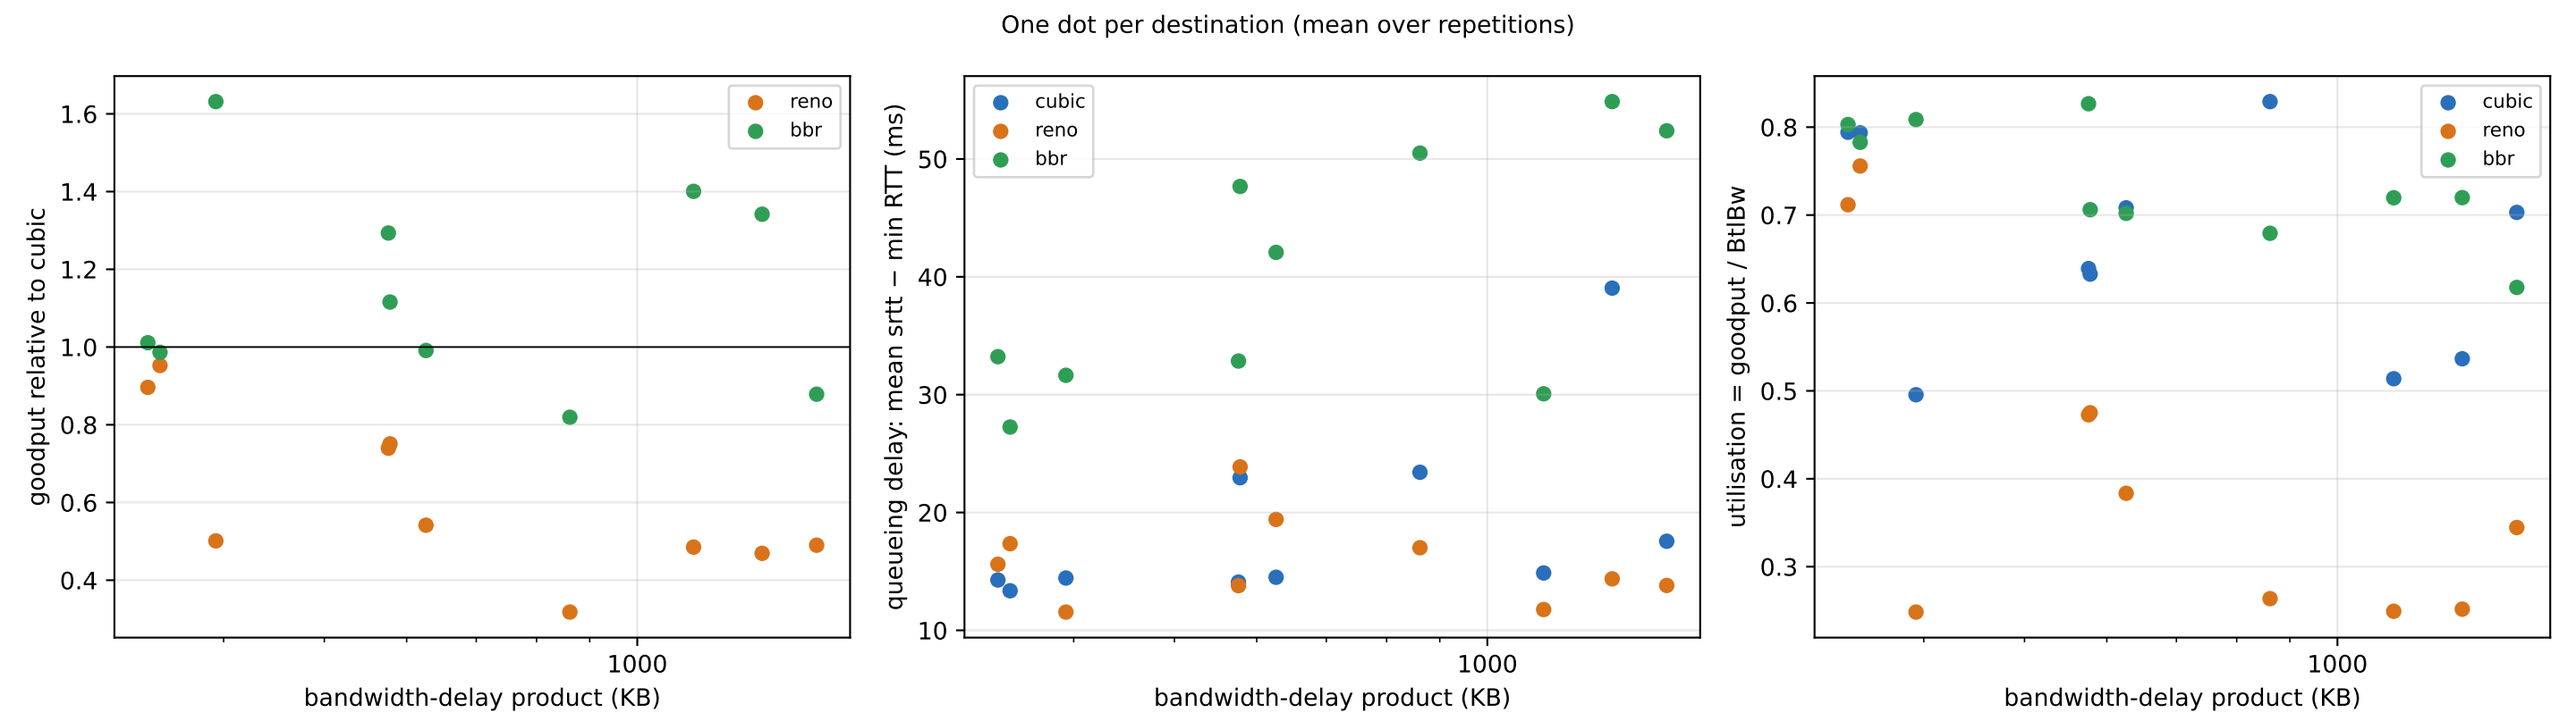
One dot per destination (mean over repetitions)
goodput relative to cubic
1.6
1.4
1.2
1.0
0.8
0.6
0.4
reno
bbr
1000
bandwidth-delay product (KB)
queueing delay: mean srtt − min RTT (ms)
50
40
30
20
10
cubic
reno
bbr
1000
bandwidth-delay product (KB)
utilisation = goodput / BtlBw
0.8
0.7
0.6
0.5
0.4
0.3
cubic
reno
bbr
1000
bandwidth-delay product (KB)