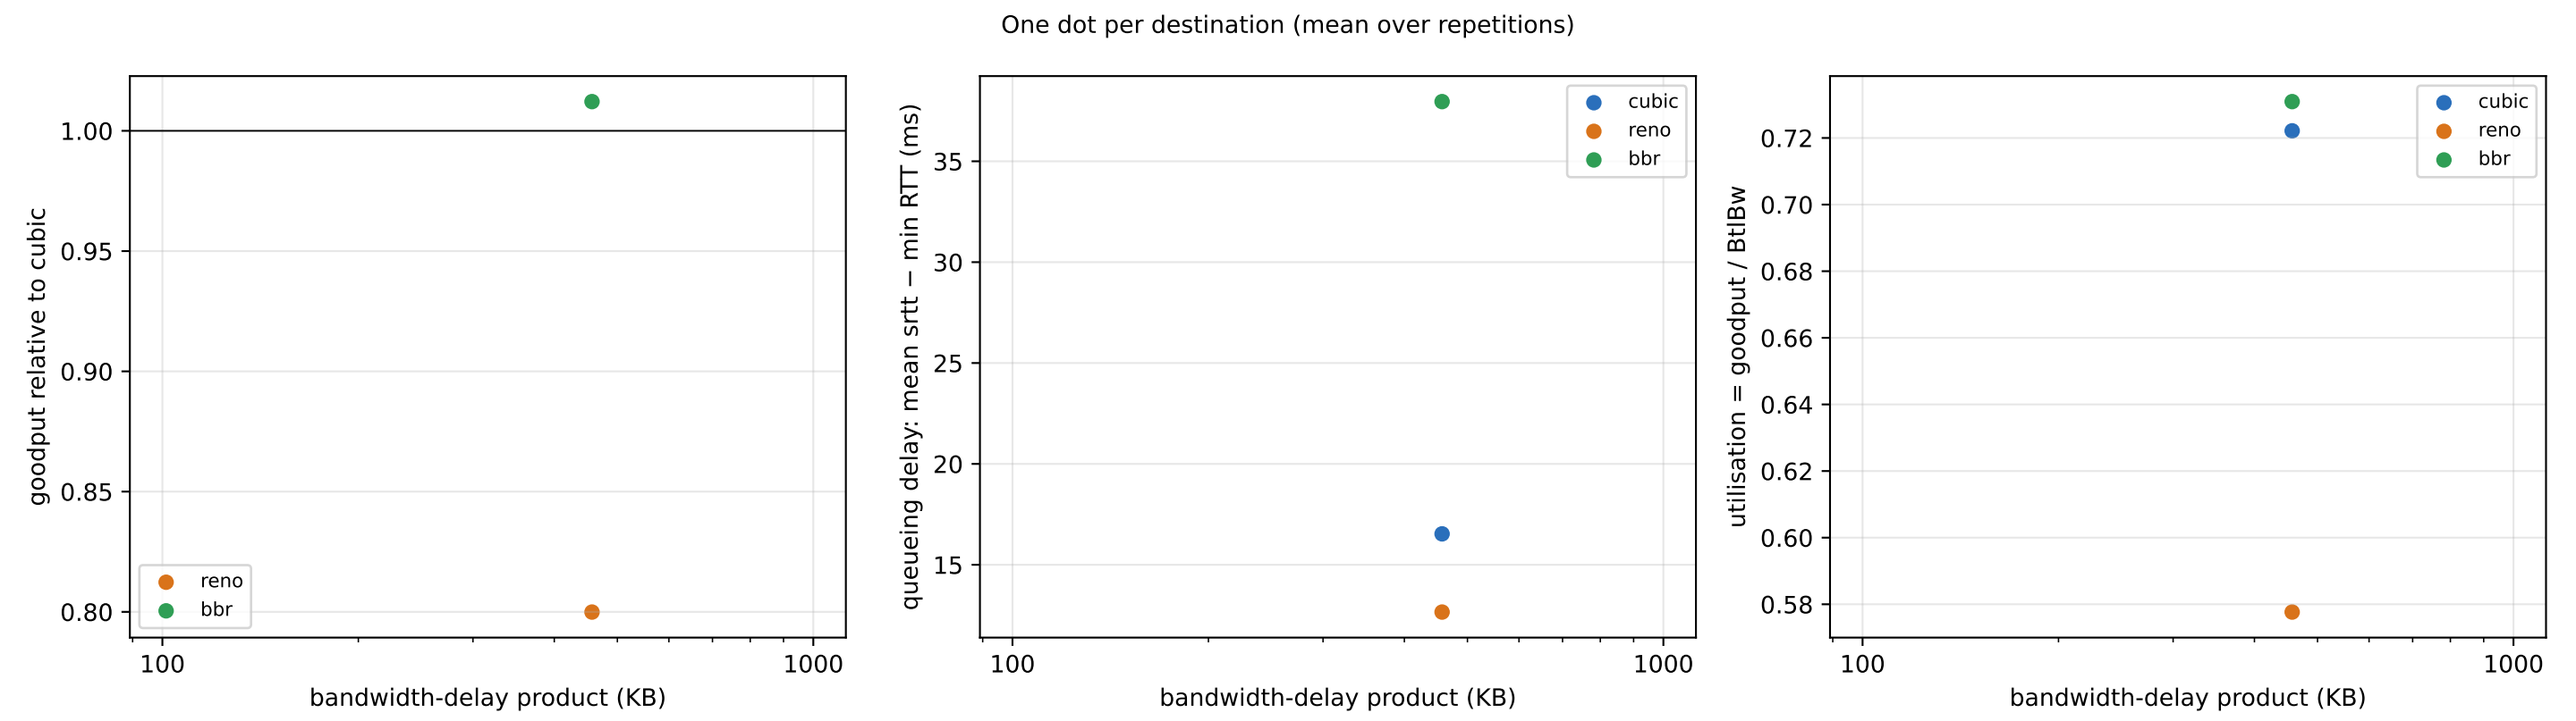
One dot per destination (mean over repetitions)
goodput relative to cubic
1.00
0.95
0.90
0.85
0.80
reno
bbr
100
1000
bandwidth-delay product (KB)
queueing delay: mean srtt − min RTT (ms)
35
30
25
20
15
cubic
reno
bbr
100
1000
bandwidth-delay product (KB)
utilisation = goodput / BtlBw
0.72
0.70
0.68
0.66
0.64
0.62
0.60
0.58
cubic
reno
bbr
100
1000
bandwidth-delay product (KB)