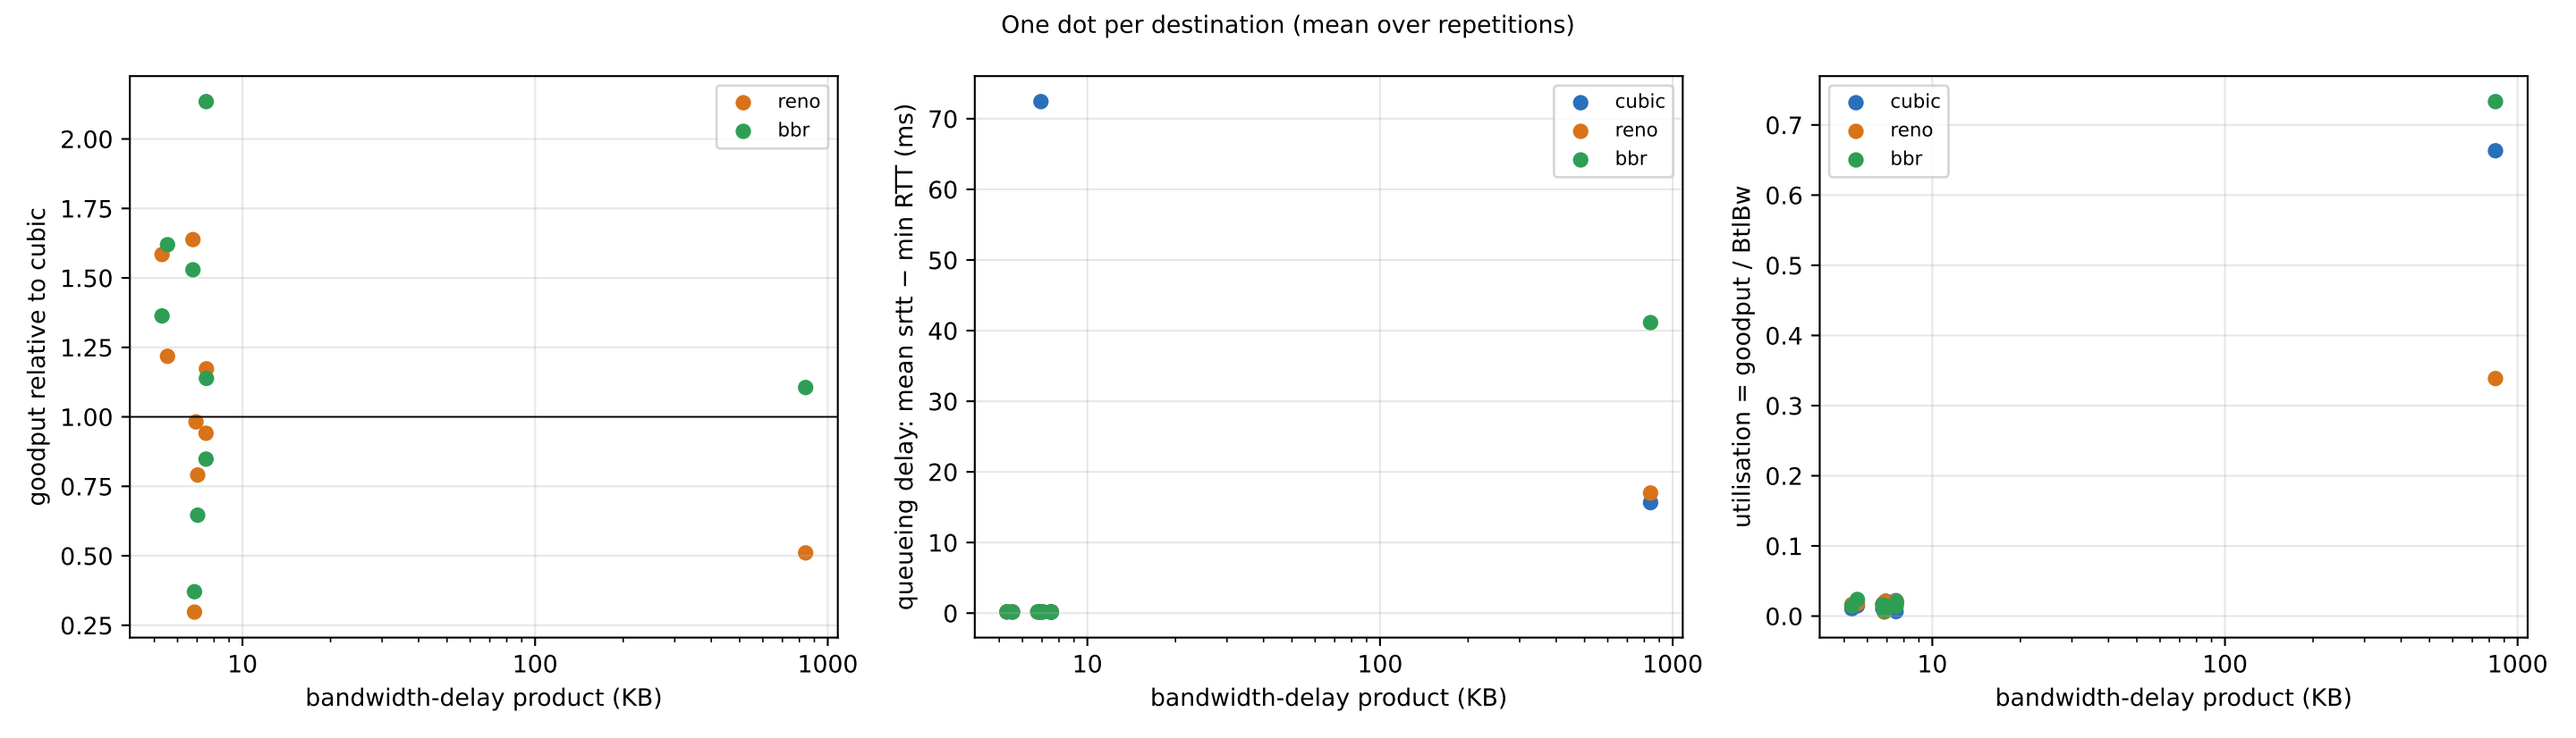
One dot per destination (mean over repetitions)
goodput relative to cubic
bandwidth-delay product (KB)
reno
bbr
queueing delay: mean srtt − min RTT (ms)
cubic
utilisation = goodput / BtlBw