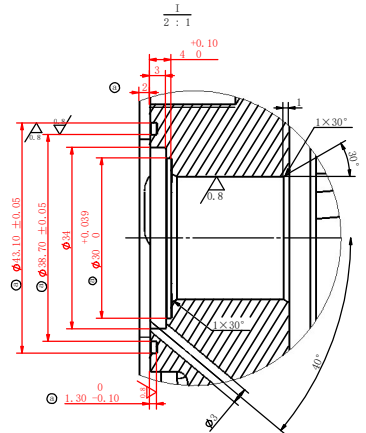





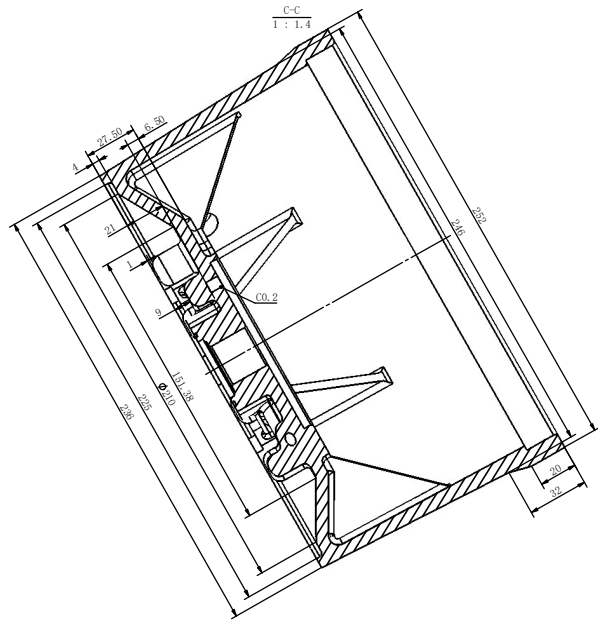
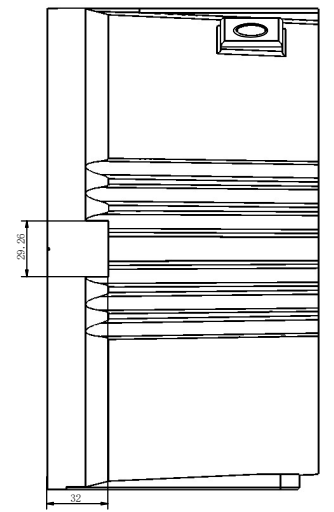
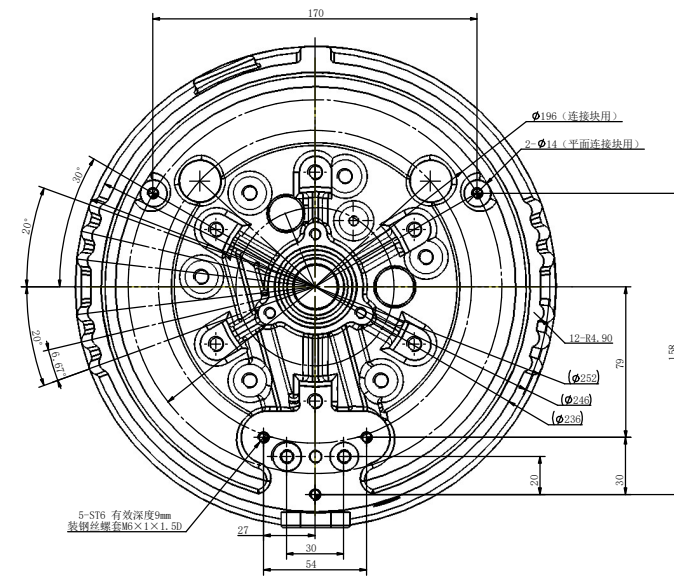
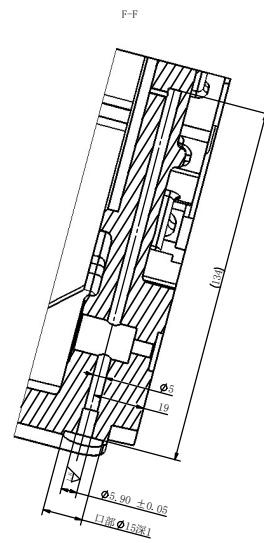
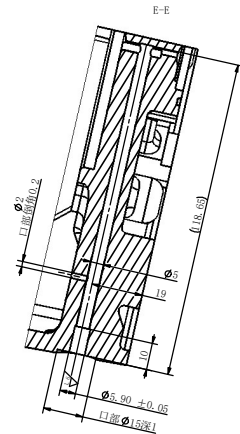
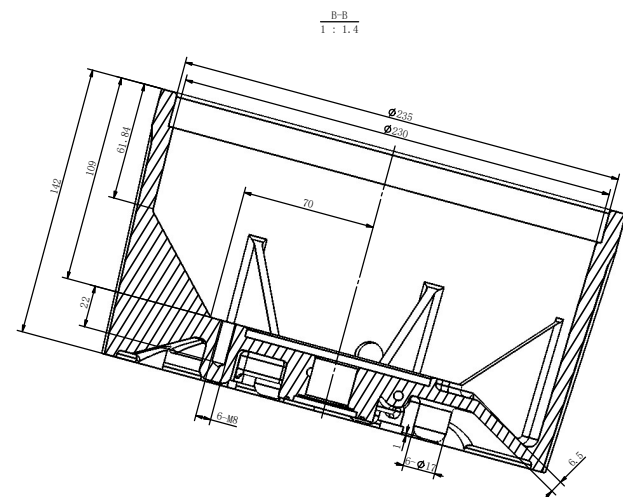
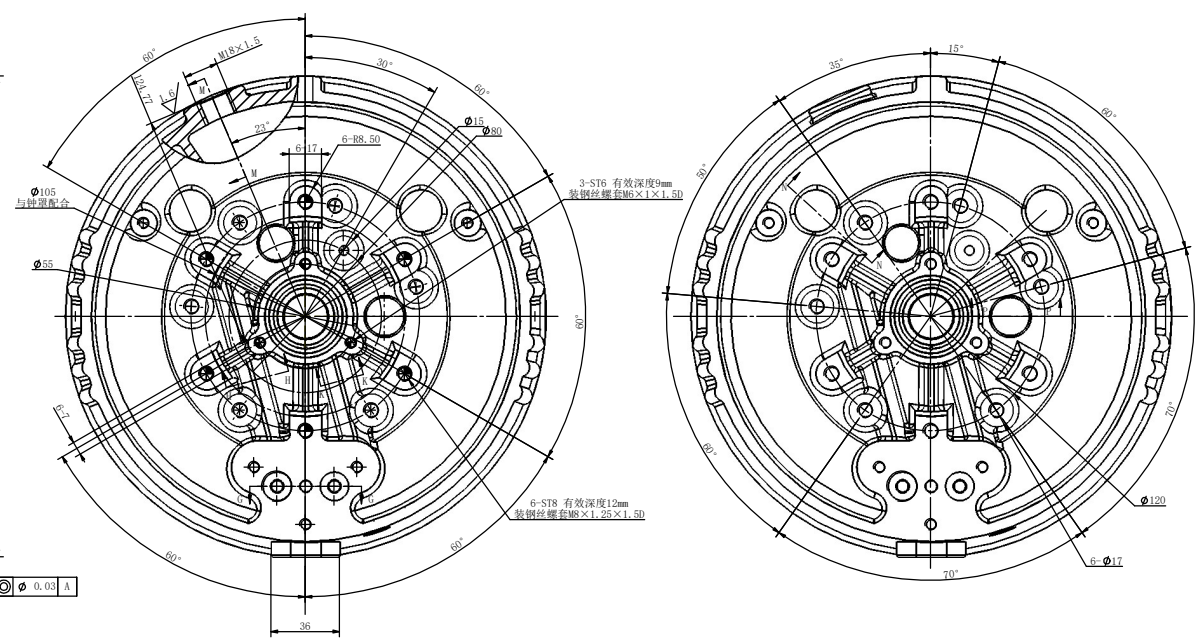
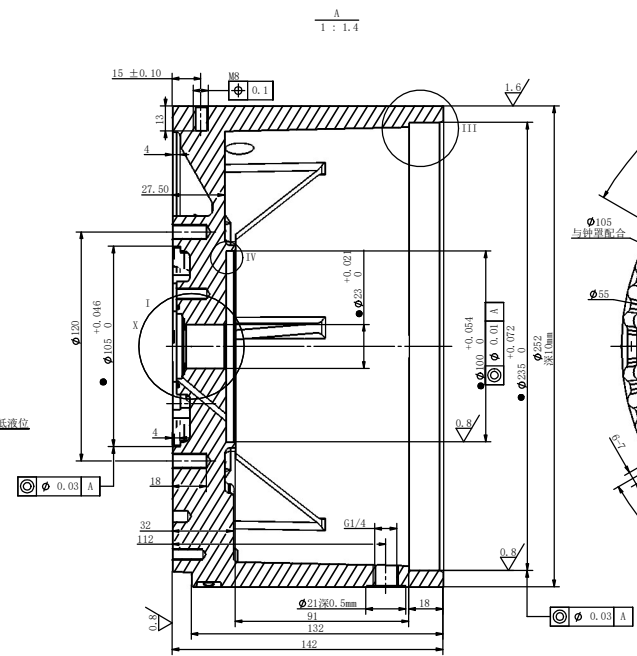
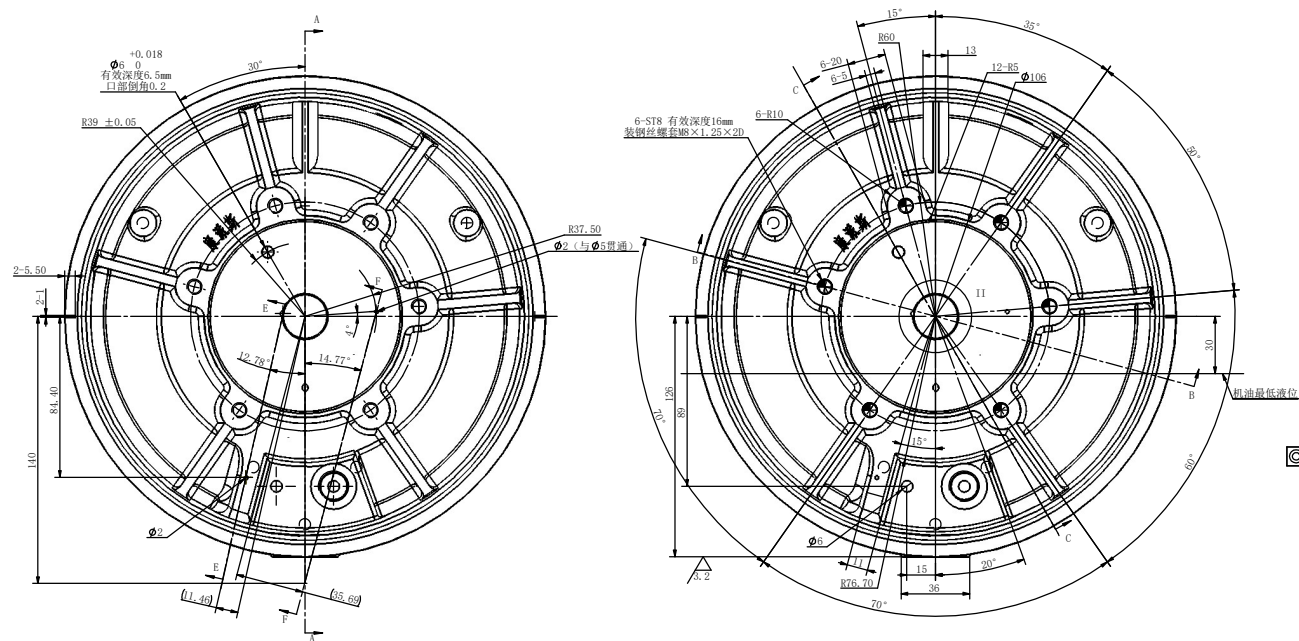


技术要求:

1. 未注圆角R3-R5, 未注拔模斜度 $2^{\circ} \pm 0.5^{\circ}$;
2. 铸件需满足气密性要求, 腔经1.5MPa气压, 测试2min无渗漏;
3. 铸件及加工表面不得有气孔、砂眼和磕碰伤;
4. 铸件表面要求抛丸和钝化处理 (耐腐蚀96h GB/T10125-1997);
5. 去除锐角毛刺;
6. 所有带螺纹孔口部倒角 120° 到螺纹底径;
7. 所有加工孔粗糙度 $R_a \leq 1.6$;
8. $\phi 100$ 、 $\phi 105$ 、 $\phi 235$ 与基准A $\phi 20$ 同轴度 $\leq \phi 0.03$;
9. $\phi 235$ 椭圆度 ≤ 0.05 。

压入轴套后加工尺寸

						A356、Z-T6 ASTM B108、B108M-15			浙江康派斯 汽车科技有限公司	
a	10	EL2023-009	李迪	20240405					前端盖-水冷	
标记总数	分区	设计文件	签名	年 月 日	阶 段	标 记	重 量	比 例		
设计	李迪	20230908	标准件							
校对			常核							
工艺			批准		共 张	版本	A1	SH-010-1		