




Republic of the Philippines
University of Cabuyao
(Pamantasan Ng Cabuyao)
College of Computing Studies



Katapatan Mutual Homes, Brgy. Banay-banay, City of Cabuyao, Laguna, Philippines 4025

FINALS EXAMINATION
ITP105- NETWORKING AND COMMUNICATION 2

NAME Orcasitas, Shanner Aldous G.

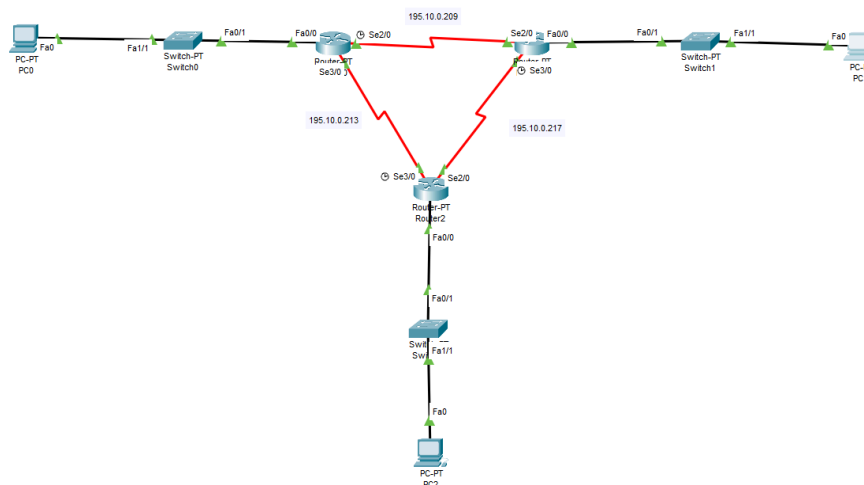



Republic of the Philippines
University of Cabuyao
(Pamantasan Ng Cabuyao)
College of Computing Studies



Katapatan Mutual Homes, Brgy. Banay-banay, City of Cabuyao, Laguna, Philippines 4025

Router0

Physical Config **CLI** Attributes

IOS Command Line Interface

```
--- System Configuration Dialog ---

Would you like to enter the initial configuration dialog? [yes/no]: n

Press RETURN to get started!

Router>en
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#int se2/0
Router(config-if)#ip add 195.10.0.209 255.255.255.252
Router(config-if)#clock rate 64000
Router(config-if)#no shut

%LINK-5-CHANGED: Interface Serial2/0, changed state to down
Router(config-if)#exi
Router(config)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to up
int se2/0
Router(config-if)#exi
Router(config)#int se3/0
Router(config-if)#ip add 195.10.0.213 255.255.255.252
Router(config-if)# no shut

Router(config-if)#
%LINK-5-CHANGED: Interface Serial3/0, changed state to up
exi
Router(config)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial3/0, changed state to up
```

☐ Top



Republic of the Philippines
University of Cabuyao
(Pamantasan Ng Cabuyao)
College of Computing Studies



Katapatan Mutual Homes, Brgy. Banay-banay, City of Cabuyao, Laguna, Philippines 4025

Router1

Physical Config **CLI** Attributes

IOS Command Line Interface

```
--- System Configuration Dialog ---

Would you like to enter the initial configuration dialog? [yes/no]:

Press RETURN to get started!

Router>en
Router#config t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#int se3/0
Router(config-if)#exi
Router(config)#int se2/0
Router(config-if)#ip add 195.10.0.209 255.255.255.252
Router(config-if)#no shut

Router(config-if)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up

Router(config-if)#exi
Router(config)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to up

Router(config)#int se3/0
Router(config-if)#ip add 195.10.0.217 255.255.255.252
Router(config-if)#clock rate 64000
Router(config-if)#no shut

%LINK-5-CHANGED: Interface Serial3/0, changed state to down
Router(config-if)#exi
Router(config)#
%LINK-5-CHANGED: Interface Serial3/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial3/0, changed state to up
```

Copy Paste

☐ Top



Republic of the Philippines
University of Cabuyao
(Pamantasan Ng Cabuyao)
College of Computing Studies



Katapatan Mutual Homes, Brgy. Banay-banay, City of Cabuyao, Laguna, Philippines 4025

Router2

Physical Config **CLI** Attributes

IOS Command Line Interface

```
63480K Bytes of NVRAM: System Config, NVRAM reserved, 9216 bytes reserved for boot image
--- System Configuration Dialog ---

Would you like to enter the initial configuration dialog? [yes/no]: n

Press RETURN to get started!

Router>en
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#int se2/0
Router(config-if)#ip add 195.10.0.217 255.255.255.252
Router(config-if)#no shut

Router(config-if)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up

Router(config-if)#exi
Router(config)#int
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to
Router(config)#int se3/0
Router(config-if)#ip add 195.10.0.213 255.255.255.252
Router(config-if)#clock rate 64000
Router(config-if)#no shut

%LINK-5-CHANGED: Interface Serial3/0, changed state to down
Router(config-if)#exi
Router(config)#
%LINK-5-CHANGED: Interface Serial3/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial3/0, changed state to up
```

Copy Paste

☐ Top



Republic of the Philippines
University of Cabuyao
(Pamantasan Ng Cabuyao)
College of Computing Studies



Katapatan Mutual Homes, Brgy. Banay-banay, City of Cabuyao, Laguna, Philippines 4025

Router1

Physical

Config

CLI

Attributes

IOS Command Line Interface

```
Router(config-if)#exit
Router(config)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to up

Router(config)#int se3/0
Router(config-if)#ip add 195.10.0.217 255.255.255.252
Router(config-if)#clock rate 64000
Router(config-if)#no shut

%LINK-5-CHANGED: Interface Serial3/0, changed state to down
Router(config-if)#exit
Router(config)#
%LINK-5-CHANGED: Interface Serial3/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial3/0, changed state to up

Router(config)#int fa0/0
Router(config-if)#ip add 195.10.0.194. 255.255.255.240
^
% Invalid input detected at '^' marker.

Router(config-if)#ip add 195.10.0.194 255.255.255.240
Router(config-if)#no shut

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

Router(config-if)#router rip
Router(config-router)#version 2
Router(config-router)#no auto summary
Router(config-router)#network 195.10.0.209
Router(config-router)#network 195.10.0.217
Router(config-router)#network 195.10.0.194
Router(config-router)#exit
Router(config)#
```

Copy

Paste

☐ Top



Republic of the Philippines
University of Cabuyao
(Pamantasan Ng Cabuyao)
College of Computing Studies



Katapatan Mutual Homes, Brgy. Banay-banay, City of Cabuyao, Laguna, Philippines 4025

Router2

Physical

Config

CLI

Attributes

IOS Command Line Interface

```
Router(config-if)#no shut
Router(config-if)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up

Router(config-if)#exi
Router(config)#int
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to
Router(config)#int se3/0
Router(config-if)#ip add 195.10.0.213 255.255.255.252
Router(config-if)#clock rate 64000
Router(config-if)#no shut

%LINK-5-CHANGED: Interface Serial3/0, changed state to down
Router(config-if)#exi
Router(config)#
%LINK-5-CHANGED: Interface Serial3/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial3/0, changed state to up

Router(config)#int fa0/0
Router(config-if)#ip add 195.10.0.129 255.255.255.192
Router(config-if)#no shut

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

Router(config-if)#router rip
Router(config-router)#version 2
Router(config-router)#no auto summary
Router(config-router)#network 195.10.0.217
Router(config-router)#network 195.10.0.213
Router(config-router)#network 195.10.0.129
Router(config-router)#exi
Router(config)#
```

Copy

Paste

☐ Top



Republic of the Philippines
University of Cabuyao
(Pamantasan Ng Cabuyao)
College of Computing Studies



Katapatan Mutual Homes, Brgy. Banay-banay, City of Cabuyao, Laguna, Philippines 4025

Router0

Physical Config **CLI** Attributes

IOS Command Line Interface

```
Router(config-if)#no shut
%LINK-5-CHANGED: Interface Serial2/0, changed state to down
Router(config-if)#exi
Router(config)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to up
int se2/0
Router(config-if)#exi
Router(config)#int se3/0
Router(config-if)#ip add 195.10.0.213 255.255.255.252
Router(config-if)# no shut

Router(config-if)#
%LINK-5-CHANGED: Interface Serial3/0, changed state to up
exi
Router(config)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial3/0, changed state to up

Router(config)#int fa0/0
Router(config-if)#ip add 195.10.0.1 255.255.255.128
Router(config-if)#no shut

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

Router(config-if)#router rip
Router(config-router)#version 2
Router(config-router)#no auto summary
Router(config-router)#network 195.10.0.209
Router(config-router)#network 195.10.0.213
Router(config-router)#network 195.10.0.1
Router(config-router)#exi
Router(config)#
```

☐ Top