



PRELIM EXAMINATION ITP105 - NETWORKING AND COMMUNICATION 2


NAME: ORCASITAS SHANNER ALDOUS G

Instructions:

1. Create a video tutorial explaining the VTP and VLAN concept.
2. Demonstrate applying them in a LAN (See technical specification below).
3. Use the Packet Tracer app to simulate the process. Make sure that you are visible in the video.
4. Limit your recordings to a maximum of 5 minutes.
5. Upload your video demonstration to YouTube.com.
6. PASTE YOUR YOUTUBE LINK IN THE PROVIDED SPACE:
<https://youtu.be/EgPMb4UivyM?si=Y-PezLzK147S0oLL>
7. Supply the required screenshots below.

TECHNICAL SPECIFICATIONS:

1. Design and create a network.

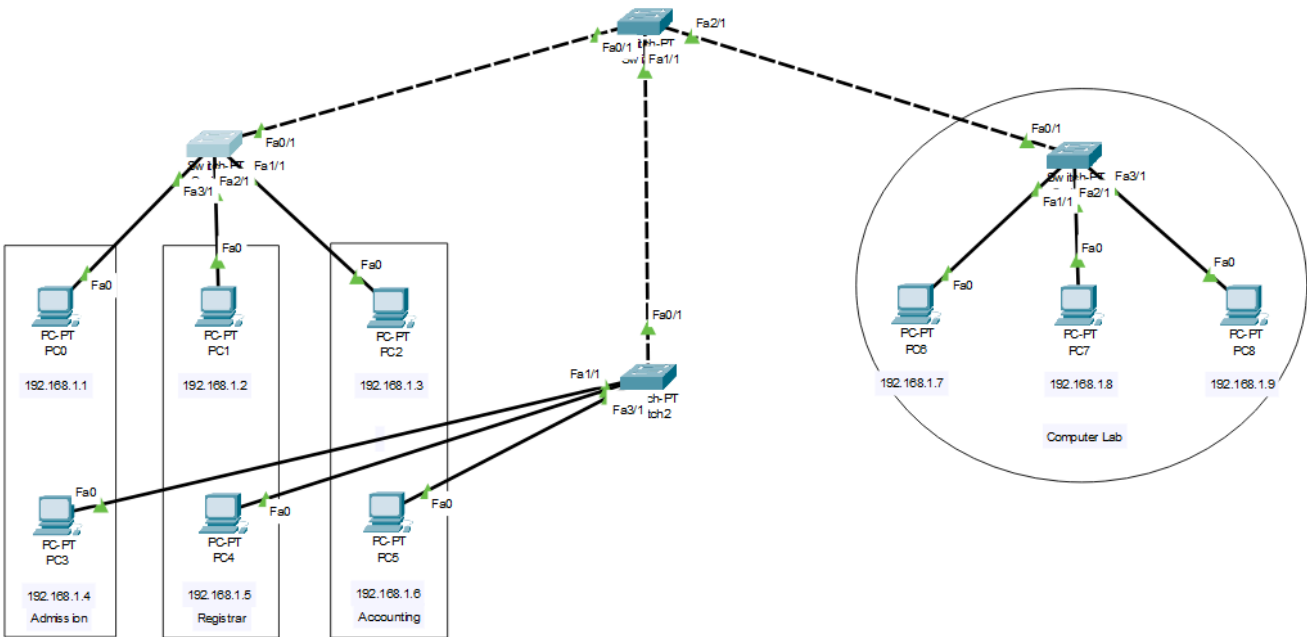

2. Configure each switch.

- 2.1 Append your surname in the switch's hostname (example: Switch0_Montecillo).
- 2.2 Use VTP version 2, "pnc" as the vtp domain name, and "1234" as the vtp password. Assign VTP mode based on the table below:

Network Device	Network Device
Switch 0	VTP Server



Republic of the Philippines

University of Cabuyao

(Pamantasan Ng Cabuyao)

College of Computing Studies



Katapatan Mutual Homes, Brgy. Banay-banay, City of Cabuyao, Laguna, Phillippines 4025

Switch 1	VTP Client
Switch 2	VTP Client
Switch 3	VTP Client

2.3. Provide a screenshot of each switch's VTP status and paste it in the box below:

Network Device	Screenshot
Switch 0	<pre>Server_Orcasitas#show vtp status VTP Version : 1 Configuration Revision : 8 Maximum VLANs supported locally : 255 Number of existing VLANs : 9 VTP Operating Mode : Server VTP Domain Name : CSS VTP Pruning Mode : Disabled VTP V2 Mode : Disabled VTP Traps Generation : Disabled MD5 digest : 0xCF 0x3D 0x5C 0xC2 0x34 0xCC 0xD5 0xA9 Configuration last modified by 0.0.0.0 at 3-1-93 01:37:06</pre>
Switch 1	<pre>VTP Version : 1 Configuration Revision : 8 Maximum VLANs supported locally : 255 Number of existing VLANs : 9 VTP Operating Mode : Client VTP Domain Name : CSS VTP Pruning Mode : Disabled VTP V2 Mode : Disabled VTP Traps Generation : Disabled MD5 digest : 0xCF 0x3D 0x5C 0xC2 0x34 0xCC 0xD5 0xA9 Configuration last modified by 0.0.0.0 at 3-1-93 01:37:06</pre>
Switch 2	<pre>VTP Version : 1 Configuration Revision : 8 Maximum VLANs supported locally : 255 Number of existing VLANs : 9 VTP Operating Mode : Client VTP Domain Name : CSS VTP Pruning Mode : Disabled VTP V2 Mode : Disabled VTP Traps Generation : Disabled MD5 digest : 0xCF 0x3D 0x5C 0xC2 0x34 0xCC 0xD5 0xA9</pre>
Switch 3	<pre>VTP Version : 1 Configuration Revision : 8 Maximum VLANs supported locally : 255 Number of existing VLANs : 9 VTP Operating Mode : Client VTP Domain Name : CSS VTP Pruning Mode : Disabled VTP V2 Mode : Disabled VTP Traps Generation : Disabled MD5 digest : 0xCF 0x3D 0x5C 0xC2 0x34 0xCC 0xD5 0xA9</pre>

2.4 Add the following VLANs in the VTP Server:

VLAN ID	VLAN Name
10	Admission
20	Registrar
30	Accounting
40	ComputerLab



Republic of the Philippines

University of Cabuyao

(Pamantasan Ng Cabuyao)

College of Computing Studies



Katapatan Mutual Homes, Brgy. Banay-banay, City of Cabuyao, Laguna, Phillippines 4025

2.5 Assign trunk link to VTP server and access link to VTP client.

VLAN ID / Name	Assigned PC
10 - Admission	PC0, PC3
20 - Registrar	PC1, PC4
30 - Accounting	PC2, PC5
40 - ComputerLab	PC6, PC8

2.6 Provide a screenshot of each switch's VLAN table and paste it in the box below.

Network Device	Screenshot			
Switch 0	VLAN Name		Status	Ports
	-----			-----
	1	default	active	Fa3/1, Fa4/1, Fa5/1
	10	Admission	active	
	20	Registrar	active	
	30	Accounting	active	
	40	Computer_Lab	active	
	1002	fddi-default	active	
	1003	token-ring-default	active	
	1004	fddinet-default	active	
1005	trnet-default	active		
Switch 1	VLAN Name		Status	Ports
	-----			-----
	1	default	active	Fa4/1, Fa5/1
	10	Admission	active	Fa3/1
	20	Registrar	active	Fa2/1
	30	Accounting	active	Fa1/1
	40	Computer_Lab	active	
	1002	fddi-default	active	
	1003	token-ring-default	active	
	1004	fddinet-default	active	
1005	trnet-default	active		
Switch 2	VLAN Name		Status	Ports
	-----			-----
	1	default	active	Fa4/1, Fa5/1
	10	Admission	active	
	20	Registrar	active	
	30	Accounting	active	
	40	Computer_Lab	active	Fa1/1, Fa2/1, Fa3/1
	1002	fddi-default	active	
	1003	token-ring-default	active	
	1004	fddinet-default	active	
1005	trnet-default	active		
Switch 3	VLAN Name		Status	Ports
	-----			-----
	1	default	active	Fa4/1, Fa5/1
	10	Admission	active	Fa1/1
	20	Registrar	active	Fa2/1
	30	Accounting	active	Fa3/1
	40	Computer_Lab	active	
	1002	fddi-default	active	
	1003	token-ring-default	active	
	1004	fddinet-default	active	
1005	trnet-default	active		



Test Ping Connection

Network Device	Screenshot
PC 0	Command Prompt Cisco Packet Tracer PC Command Line 1.0 C:\>ping 192.168.1.4 Pinging 192.168.1.4 with 32 bytes of data: Reply from 192.168.1.4: bytes=32 time<1ms TTL=128 Reply from 192.168.1.4: bytes=32 time<1ms TTL=128 Reply from 192.168.1.4: bytes=32 time=11ms TTL=128 Reply from 192.168.1.4: bytes=32 time=4ms TTL=128 Ping statistics for 192.168.1.4: Packets: Sent = 4, Received = 4, Lost = 0 (0% loss), Approximate round trip times in milli-seconds: Minimum = 0ms, Maximum = 11ms, Average = 3ms C:\>
PC 1	Command Prompt Cisco Packet Tracer PC Command Line 1.0 C:\>ping 192.168.1.5 Pinging 192.168.1.5 with 32 bytes of data: Reply from 192.168.1.5: bytes=32 time=1ms TTL=128 Reply from 192.168.1.5: bytes=32 time<1ms TTL=128 Reply from 192.168.1.5: bytes=32 time=1ms TTL=128 Reply from 192.168.1.5: bytes=32 time<1ms TTL=128 Ping statistics for 192.168.1.5: Packets: Sent = 4, Received = 4, Lost = 0 (0% loss), Approximate round trip times in milli-seconds: Minimum = 0ms, Maximum = 1ms, Average = 0ms
PC 2	Command Prompt Cisco Packet Tracer PC Command Line 1.0 C:\>ping 192.168.1.6 Pinging 192.168.1.6 with 32 bytes of data: Reply from 192.168.1.6: bytes=32 time<1ms TTL=128 Reply from 192.168.1.6: bytes=32 time<1ms TTL=128 Reply from 192.168.1.6: bytes=32 time=1ms TTL=128 Reply from 192.168.1.6: bytes=32 time<1ms TTL=128 Ping statistics for 192.168.1.6: Packets: Sent = 4, Received = 4, Lost = 0 (0% loss), Approximate round trip times in milli-seconds: Minimum = 0ms, Maximum = 1ms, Average = 0ms



Republic of the Philippines

University of Cabuyao

(Pamantasan Ng Cabuyao)

College of Computing Studies



Katapatan Mutual Homes, Brgy. Banay-banay, City of Cabuyao, Laguna, Phillippines 4025

PC 6	Command Prompt Cisco Packet Tracer PC Command Line 1.0 C:\>ping 192.168.8 Ping request could not find host 192.168.8. Please check the name and try again. C:\>ping 192.168.1.8 Pinging 192.168.1.8 with 32 bytes of data: Reply from 192.168.1.8: bytes=32 time<1ms TTL=128 Reply from 192.168.1.8: bytes=32 time=12ms TTL=128 Reply from 192.168.1.8: bytes=32 time=12ms TTL=128 Reply from 192.168.1.8: bytes=32 time<1ms TTL=128 Ping statistics for 192.168.1.8: Packets: Sent = 4, Received = 4, Lost = 0 (0% loss), Approximate round trip times in milli-seconds: Minimum = 0ms, Maximum = 12ms, Average = 6ms C:\>ping 192.168.1.9 Pinging 192.168.1.9 with 32 bytes of data: Reply from 192.168.1.9: bytes=32 time<1ms TTL=128 Reply from 192.168.1.9: bytes=32 time<1ms TTL=128 Reply from 192.168.1.9: bytes=32 time<1ms TTL=128 Reply from 192.168.1.9: bytes=32 time<1ms TTL=128 Ping statistics for 192.168.1.9: Packets: Sent = 4, Received = 4, Lost = 0 (0% loss), Approximate round trip times in milli-seconds: Minimum = 0ms, Maximum = 0ms, Average = 0ms
------	--