



A BRIEF INTRODUCTION

As a leading international provider of truck solutions, SHACMAN has a presence in over 150 countries and markets worldwide, having delivered over 2.5 million trucks to millions of customers globally.

Since its establishment in 1968, SHACMAN has been dedicated to producing reliable trucks that meet customer needs. Through the operations of complete vehicles, specialized vehicles, parts, and after-sales services, an organized business matrix has been established.

To fully leverage the advantages of the entire industry chain and optimize the market services provided to global partners and customers, SHACMAN's brand image has evolved from a sole manufacturer to a comprehensive solution provider. In pursuit of our proud service motto - "To Satisfy Customers with Ultimate Quality", we are going the extra mile for customer solution.

25,000+

Workforce

100+

Subsidiary

215,000

Annual designed production capacity

**2.5
Million+**

Total sales

**370
thousand+**

Export sales



- National Enterprise Technology Center
- Axle Technology Center
- Key Laboratory of Energy Saving and New Energy Heavy Duty Commercial Vehicles



CARE SERVICE

Customized

1st CARE

We assign special personnel on site to provide customers with round-the-clock on-site service to meet their needs at the first time.

Localization Solution

We have over 150 top-notch service engineers stationed overseas on a long-term basis, capable of swiftly addressing diverse customer service needs.

Pre-Inventory of Spare Parts

We've innovatively introduced pre-inventory of spare parts in the market, significantly reducing the time required to supply the needed parts to our customers.

All-round

Pre-delivery


A series of pre-delivery solution planning, including site investigation, product customization, financial service options, and service assurance plans.

Delivery

A series of delivery services, including departure inspection, port inspection, PDI, operation training.

Post-delivery

Global service network, SHACMAN Telematics, tailored training programs, and regular maintenance plans safeguard the operation of every truck. Additionally, gathering customer satisfaction evaluations can enhance our service quality.

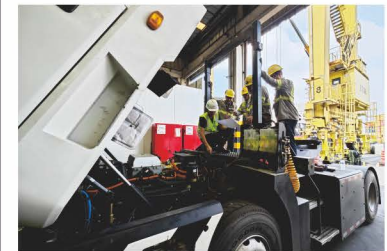

Remote

Online Consultation

SHACMAN headquarters has established a remote expert service team, providing customers with uninterrupted technical support around the clock.

The regional call center ensures that immediate telephone technical assistance is available in case of emergencies.

Quality Big Data

In response to vehicle issues detected through Big Data, we promptly implement improvements.



Extra

Emergency Response Team

The highly mobile emergency response team at SHACMAN headquarters is always ready to provide on-site support to clients overseas.

Value-added Service

Free consultation, technical support, free vehicle inspection, second-hand car and other value-added services.

In-house Spare Parts

We are establishing an in-house spare parts supply system globally to provide customers with genuine high-quality accessories and a one-stop maintenance service.

SHACMAN Telematics

Vehicle positioning, fuel consumption statistics, remote locking, abnormal alerts, video surveillance, and many other functions are all at your fingertips.



Accessory Information System

- One-Key Inquiry
- Intelligent Analysis
- Automatic Recommendation
- Image Recognition



FLEXIBLE
GUARANTEE

3-tier accessory guarantee model:

- Combining overseas channel reserves
- Precise market pre-delivery accessories
- Self-operated accessory guarantees

160+

Accessories channels

30 million+


USD accessories reserves

Drive			4x2	6x2	6x4	
GCW (t)			42	50	60	90
Main configuration	Cab	Type	Extended high roof, extended flat roof			
		Suspension	Four-point air suspension			
		Seat	Ventilation and heating air seats			
		Air conditioner	Electric automatic constant temperature AC			
	Engine	Model	WP13/ M13/Z14			
		Emmission standard	Euro III-VI			
		Power range (Ps)	480-600			
		Torque (N-m)	2400-2750			
	Transmission	Model	AMT (12/16)/ MT (16)			
		Torque (N-m)	2200-2800			
	Axle	Front axle	7.3t			9.5t
		Rear axle	13t single-stage			13t double-stage
	Chassis	Dimension (mm)	(940-850) ×270 (single-layer 8)			(970-850) ×300 (8+5)
Wheel base (mm)		3800	3450+1350	3175+1400	3450+1350	
Fuel tank		600L-1380L aluminum alloy	600L-1000L aluminum alloy			
Tire		295/80R22.5, 315/70R22.5, 315/80R22.5		11R22.5, 12R22.5, 295/80R22.5, 315/70R22.5, 315/80R22.5		
Suspension		Leaf spring suspension/air suspension			Leaf spring suspension	
Saddle		L50/JOST 50			JOST 90	
Applicable condition	Application	Long distance logistics, standard load transportation		Medium to short distance transportation, heavy transportation		
	Economic/Max speed (km/h)	70-90/120	65-80/100	50-80/90	45-65/90	
Other configurations		Electric flipping cab, power glass lift, Electric heated rearview mirror, multi-function steering wheel, ventilated heated air seat, Hande maintenance-free axle, 220Ah maintenance-free battery, EBS + ESC, 360° vision system, 10-inch LCD display, tire pressure monitoring system, driver fatigue monitoring system, individual warm air, folding desktop, 42L onboard refrigerator, 1200W power inverter, power sunroof, AEBs, ACC, LDWS+FCWS, aluminum alloy rim, push button start, load self-weighing axle, centralized lubrication of saddle, SHACMAN Telematics				



				
Drive		6x4	8x4	
GCW (t)		50	70	
Main configuration	Cab	Type	Extended flat roof	
		Suspension	Four-point air suspension	
		Seat	Ventilation and heating air seats	
		Air conditioner	Electric automatic constant temperature AC	
	Engine	Model	WP13/ M13/ M10	
		Emmission standard	Euro III - V	
		Power range (Ps)	440-560	
		Torque (N·m)	2100-2600	
	Transmission	Model	AMT (12)/ MT (12)	
		Torque (N·m)	2200-2800	
	Axle	Front axle	7.5t	9.5t
		Rear axle	16t double-stage	
	Chassis	Dimension (mm)	(970-850)×300(8+7+exterior 8)	
		Wheel base (mm)	4200+1400	1950+4200+1400
		Fuel tank	500L alumimum alloy	600L alumimum alloy
Tire		315/80R22.5/ 12.00R20		
Suspension		Leaf spring suspension		
Applicable condition	Tipper container	5600×2300×1500	7600×2300×1500+500	
	Application	Heavy transportation, mining transportation	Heavy transportation, road transportation	
	Economic/Max speed(km/h)	60-70/90	60-70/90	
Other configurations		Multifunction steering wheel (with cruise control), electric window lifter, electric flipping, electric heated mirrors, radiator grille protection, electrically heated fuel sensor, ABS+ASR, aluminum air storage tank, rear underride guard, LED headlights, 360° view+10-inch display, 4kW air heater, 220Ah maintenance-free battery		

Drive			4×2		6×2R		6×4		
GVW (t)			18		25				
Main configuration	Cab	Type	Medium length high roof		Extended high roof				
		Suspension	Four-point air suspension						
		Seat	Ventilation and heating air seats						
	Engine	Air conditioner	Electric automatic constant temperature AC						
		Model	WP7H						
		Emmission standard	EURO V						
		Power range (Ps)	300-350						
	Transmission	Torque (N·m)	1000-1300						
		Model	MT (8)						
		Torque (N·m)	1100-1400						
	Axle	Front axle	4.8t		7.3t				
		Rear axle	10t single-stage		11.5t single-stage				
	Chassis	Dimension (mm)	870×270(single-layer 7)			870×270(single-layer 8)			
		Wheel base (mm)	7250		5300/6200+1350		6400+1350		
		Fuel tank	600L aluminum alloy		600L aluminum alloy				
Tire		275/70R22.5							
Suspension		Leaf spring suspension							
Applicable condition	Tipper container (mm)		9700×2550×4000		10720/11620×2550×4000		9500×2550×4000		
	Application		Inter city delivery, light transportation, Cold-chain transportation						
Other configurations	Economic/Max speed (km/h)		70-85/100						
			Multifunction steering wheel (with cruise control), electric window lifter, electric flipping, electric heated mirrors, electric sunroof, radiator grille protection, full disc brakes, brake pad wear indicator, electrically heated fuel sensor, EBS+ESC, aluminum air storage tank, tire pressure monitoring, front underbody protection, rear underride guard, LED headlights, LED taillights, full LCD instrument panel, 360° view+10-inch display, 1200W inverter, FCW+LDWS, driver fatigue monitoring, top (side) air deflector, 220Ah maintenance-free battery						

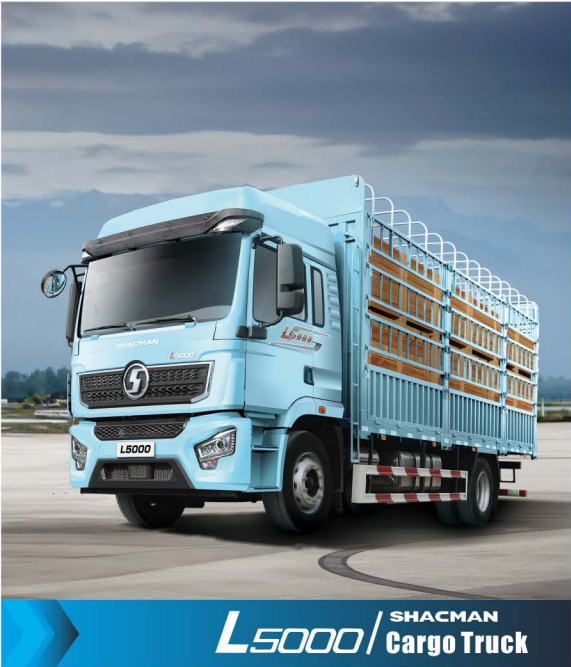

Drive		4×2		6×4		
GVW (t)		12-18		25		
Main configuration	Cab	Type	Medium-length flat roof			
		Suspension	Front fixed rear hydraulic suspension			
		Air conditioner	Electric air conditioning			
	Engine	Model	D6.7			
		Emmission standard	EURO VI			
		Rated power (hp)	290			
		Torque (N.m)	1100			
	Transmission	Model	MT			
		Torque (N.m)	1500			
	Axle	Front axle	4.8t			
		Rear axle	10t		11.5t	
		Ratio	4.625			
	Chassis	Dimension (mm)	870×250 (7+4)		850×270(8+4)	
		Wheel base (mm)	5700		5575+1400	
		Wheel overhang (mm)	2600			
		Fuel tank	300L		400L	
Tire		295/80R22.5/11R22.5				
Suspension		Front and rear multi-leaf springs				
Container (mm)		7750×2450×2500		9000×2450×2500		
Applicable condition	Application		Short and medium distance intercity logistics transportation			
	Economic/Max speed (km/h)		65-100/120			
Other configurations		Electric air conditioning, two-level board pedal, electric window lifter, hydraulic main seat, single berth, front fixed rear hydraulic suspension, side-mounted air filter, central locking (with remote control), yellow sun visor lamp, LED daytime running lights, reversing buzzer, Third seat, electric flip, four-point hydraulic suspension, air main seat, multi-function steering wheel (with cruise), electric heated rearview mirror, single cooling air conditioning				

Drive		6×4		8×4			
GVW (t)		50		70		90	
Main configuration	Cab	Type	Extended flat roof/Middle-length flat roof				
		Suspension	Hydraulic suspension				
		Seat	Air/Hydraulic main seat				
		Air conditioner	Electric automatic constant temperature AC/Single cooling AC				
	Engine	Model	WP10 ,WP12, WP13, WP13NG ,M10 ,M13, X12				
		Emmission standard	EURO II-EURO VI				
		Rated power (hp)	340-560				
		Torque (N.m)	1250-2550				
	Transmission	Model	AMT(12/13)/AMT(12/16)				
		Torque (N.m)	1800-2600				
	Axle	Front axle	9.5t				
		Rear axle	16t				
		Ratio	5.262/5.92		5.262		
	Chassis	Dimension (mm)	850×300(8+7)		850×320(8+7+8)		
		Wheel base (mm)	3775+1400		1800+3775+1400		
		Wheel overhang (mm)	850		1000		
		Fuel tank	400L-500L aluminum alloy		300L-600L aluminum alloy		
Tire		315/80R22.5/12.00R20/12.00R24					
Suspension		Leaf spring suspension					
Tipper container		5600×2300×1500		7400×2300×1500			
Applicable condition	Application	Short and medium distance urban construction waste transportation		Medium and short distance heavy-duty load mining engineering transportation			
Other configurations		Electric window lifter, water tank protection railing, Third-level board pedal, central locking					




Drive		4×2		6×4			
GCW (t)		40	50	55	90	120	
Main configuration	Cab	Type	Extended high roof/Extended flat roof/Medium length flat roof				
		Suspension	Air/Hydraulic suspension				
		Seat	Air main seat/Hydraulic main seat				
		Air conditioner	Electric automatic constant temperature AC/Single cooling AC				
	Engine	Model	WP10H/WP12/WP13NG/M10/M13/X12/Z14/15N				
		Emmission standard	EURO II-EURO VI				
		Rated power (hp)	350-480		400-560		
		Torque (N.m)	1800-2600				
	Transmission	Model	AMT(12/16)/MT(12/16)				
		Torque (N.m)	1800-2800				
	Axle	Front axle	7.5t		7.5t/9.5t	9.5t	
		Rear axle	13t	13t	11.5t/13t	13t/16t	16t
	Chassis	Dimension (mm)	(940-850)×300(single-layer 8)			850×300 (8+5)	850×300 (8+7)
		Wheel base (mm)	3200/3600/3800			3175+1400/3375+1400	
		Fuel tank	500L-1000L aluminum alloy				
		Tire	295/80R22.5, 315/80R22.5, 11R22.5, 12R22.5			12R22.5/12.00R20	12.00R20/12.00R24
Suspension		Leaf spring suspension/air suspension	Leaf spring suspension	Leaf spring suspension/air suspension	Leaf spring suspension		
Saddle		L50/L90/JOST 50/JOST 90					
Applicable condition	Application	Long-distance standard load logistics transportation				Medium and short distance heavy-duty load highway transportation	
Other configurations		Electric filp cab, multi-function steering wheel, power glass lift, Air main seat, electric heated mirrors, maintenance-free 180Ah battery, ABS, Fiberglass bumper, aluminum alloy gas cylinder					

Drive		4×2		6×4		
GCW (t)		40	50	55	90	120
Main configuration	Cab	Type	Extended flat roof			
		Suspension	Four-point air suspension			
		Seat	Air main seat			
	Engine	Air conditioner	Electric automatic constant temperature AC			
		Model	WP10H, WP12, WP13, WP13NG, M10/M13			
		Emmission standard	EURO II-EURO V			
	Transmission	Rated power (hp)	375-560			
		Torque (N.m)	1800-2600			
		Model	AMT(16), MT(12/16)			
	Axle	Torque (N.m)	1800-2600			
		Front axle	7.5t			9.5t
		Rear axle	13t	11.5t/13t	13t	16t
Chassis	Dimension(mm)	(940-850)×300(single-layer 8)	850×270(single-layer 8)	850×300(single-layer 8)	850×300(8+5)	850×300(8+7)
	Wheel base (mm)	3600/3800			3175+1400	
	Fuel tank	600L aluminum alloy			700L aluminum alloy	
	Tire	295/80R22.5/315/80R22.5/11R22.5/12R22.5			12R22.5/12.00R20	12.00R20/12.00R24
	Suspension	Leaf spring suspension/air suspension	Leaf spring suspension	Leaf spring suspension/air suspension	Leaf spring suspension	
Applicable condition	Applicable road condition	High-speed, high-grade highways			Paved road	
Other configurations		Electric window lifter, electric heating mirror, electric flip, central lock (dual remote control), multi-function steering wheel, aluminum alloy gas receiver, fiberglass bumper, daytime running lights, fixed boarding pedal, Single-cooled air conditioners, side guardrails, water tank protective grille, deflector	Electric window lifter, electric heating mirror, electric flip, central lock (dual remote control), multi-function steering wheel, aluminum alloy gas receiver, lightweight 90 saddle, fiberglass bumper, daytime running lights, fixed boarding pedal, Single-cooled air conditioners, side guardrails, water tank protective grille, taillight protective grille,12.00R20, deflector, 600L aluminum alloy fuel tank, lightweight three-stage integral fenders, SHACMAN Telematics	Electric window lifter, electric heating mirror, electric flip, central lock (dual remote control), multi-function steering wheel, ordinary 90 saddle, flat mounting plate, metal bumper, hinged boarding pedal, daytime running lights, water tank protective grille,Single-cooled air conditioners, side guardrails, headlamp protective grille, taillight protective grille, 315/80R22.5, upper exhaust, SHACMAN Telematics, water tank protective grille, fuel theft prevention, oil bath type air filter, three-stage primary fuel filtration, deflectors, 600L aluminum alloy fuel tank, three-stage integral fenders		



Drive		4×2		6×4		8×4		
GVW (t)		25		50		70		
Main configuration	Cab	Type	Standard		Medium-length flat roof		Standard	
		Suspension	Four-point hydraulic suspension					
		Seat	Hydraulic main seat					
		Air conditioner	Electric air conditioning					
	Engine	Model	WP6, WP10, WP12, M10					
		Emmission standard	EURO II-EURO V					
		Rated power (hp)	210-460					
		Torque Range (N·m)	750-2110					
	Transmission	Model	MT(9/10/12)					
		Torque Range (N·m)	1490-2400					
		Axle	Front axle	7.5t		9.5t		
	Rear axle		16t					
	Chassis	Dimension (mm)	850×300 (8+7)					
		Wheel base (mm)	3975		3775+1400		1800+3575+1400	
		Wheel overhang (mm)	1200		850		1000	
Fuel tank		300L /400L aluminum alloy						
Tire		12.00R20/315/80R22.5						
Suspension		Leaf spring suspension						
Tipper container (mm)		4200×2300×1300		5600×2300×1500		7400×2300×1200		
Applicable condition	Applicable road condition		Construction sites, urban construction					
Basic equipment		Electric window lifter, metal bumper, two-stage pedal, water tank protection grille						

Drive		4×2	6×4	
GVW (t)		12-18	25	
Main configuration	Cab	Type	Standard	
		Suspension	Front fixed rear hydraulic suspension	
		Air conditioner	Electric air conditioning	
	Engine	Model	WP6/WP7/ISD	
		Rated power (hp)	180-300	
		Emmission standard	EURO III-EURO V	
		Torque Range (N-m)	650-1160	
	Transmission	Model	AMT(8)/MT(8/9)	
		Torque Range (N-m)	850-1190	
	Axle	Front axle	4.8t	
		Rear axle	10t	
	Chassis	Dimension (mm)	870×250(7+4)	850×270(8+4)
		Wheel base (mm)	4000/4500/5000/5700	4375/5675+1400
		Wheel overhang (mm)	2300	2400/2600
		Fuel tank	200L/300L/400L	
Tire		10.00R20/11R22.5		
	Suspension	Leaf spring suspension		
	Container	(5000-7750)×(2300-2450)×(600-800)	(7500/9000)×2450×2500	
Applicable condition	Applicable road condition		Urban roads	
Basic equipment		Electric window lifter, central locking (dual remote control), fixed pedals, spare tire frame, aluminum alloy gas cylinder		
Other configurations		Deflectors, air main seat, electric flip, third seat		

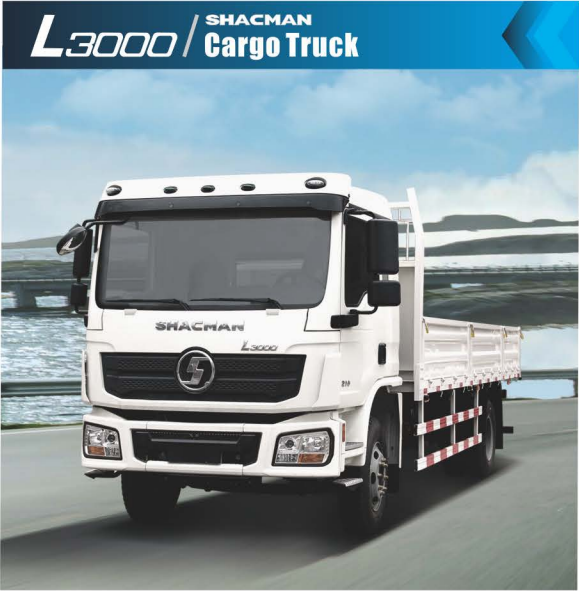

Drive		6×4	8×4	8×4	
GVW (t)		50	70	90	
Main configuration	Cab	Type	Medium-length flat roof		Standard
		Suspension	Hydraulic suspension		
		Seat	Hydraulic main seat		
		Air conditioner	Electric automatic constant temperature AC		
	Engine	Model	WP10, WP12, WP13NG, M10		
		Emmission standard	EURO II-EURO V		
		Rated power (hp)	300-460		
		Torque Range (N·m)	1250-2200		
	Transmission	Model	MT(10/12)		
		Torque Range (N·m)	1400-2400		
	Axle	Front axle	9.5t		
		Rear axle	16t double-stage		
	Chassis	Dimension (mm)	850×300(8+7)		850×320(8+7+8)
		Wheel base (mm)	3775+1400	1800+3575+1400/1800+3775+1400/1800+4975+1400	
		Wheel overhang (mm)	850	1000	
		Fuel tank	400L aluminum alloy/380L Iron		
Tire		12.00R20/12.00R24			
Suspension		Leaf spring suspension			
Tipper container	5600×2300×1500	7400×2300×1500/7600×2300×1500/8800×2300×2000			
Applicable condition	Applicable road condition	Muddy and potholed roads with steep grades			
Basic equipment		Electric window lifter, metal bumper, two-stage pedal, water tank protection grille			



How to customize your truck

- ✓  Authorized dealers of SHACMAN
- ✓  Choose your model

- ✓  Standard configuration
- ✓  Customized configuration
- ✓  Order for vehicle in stock
- ✓  Order for customized production

Delivering your vehicle

SPECIALIZED TRUCKS PRODUCT RANGE



Cement Mixer



Fire-engine



Terminal Tractor



Water Tanker



Garbage Truck



Recovery Truck



Oil Tanker



Refrigerator Truck



Sanitation Truck



Crane Truck



Suction-type Sewer Scavenger



Mining Truck