

Buttons – one MCU pin each, switch to GND (internal pull-up); slot table in `firmware_avrdd/pinmap.h`


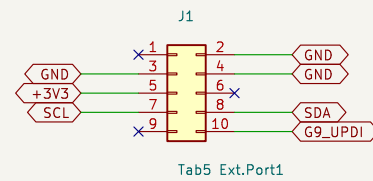


Diagram showing the connection of the UPDI pin to a breadboard. The UPDI pin is connected to the GND pin of the ATtiny10. The breadboard is labeled with +3V3, UPDI, and GND. The ATtiny10 is labeled with 1, 2, and 3.

Four circuit diagrams are shown, each representing a different capacitor value connected to a +3V3 supply and ground (GND). Each diagram consists of a red arrow pointing up to +3V3 and a green arrow pointing down to GND, with a capacitor symbol in between. The capacitors are labeled C1 (100nF), C2 (100nF), C3 (100nF), and C4 (4.7uF).



H1
M3

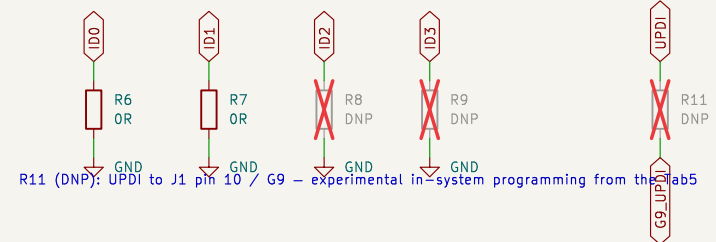