



Buere, Nicole Beatrice P.

LBYITN3 - S18

1.

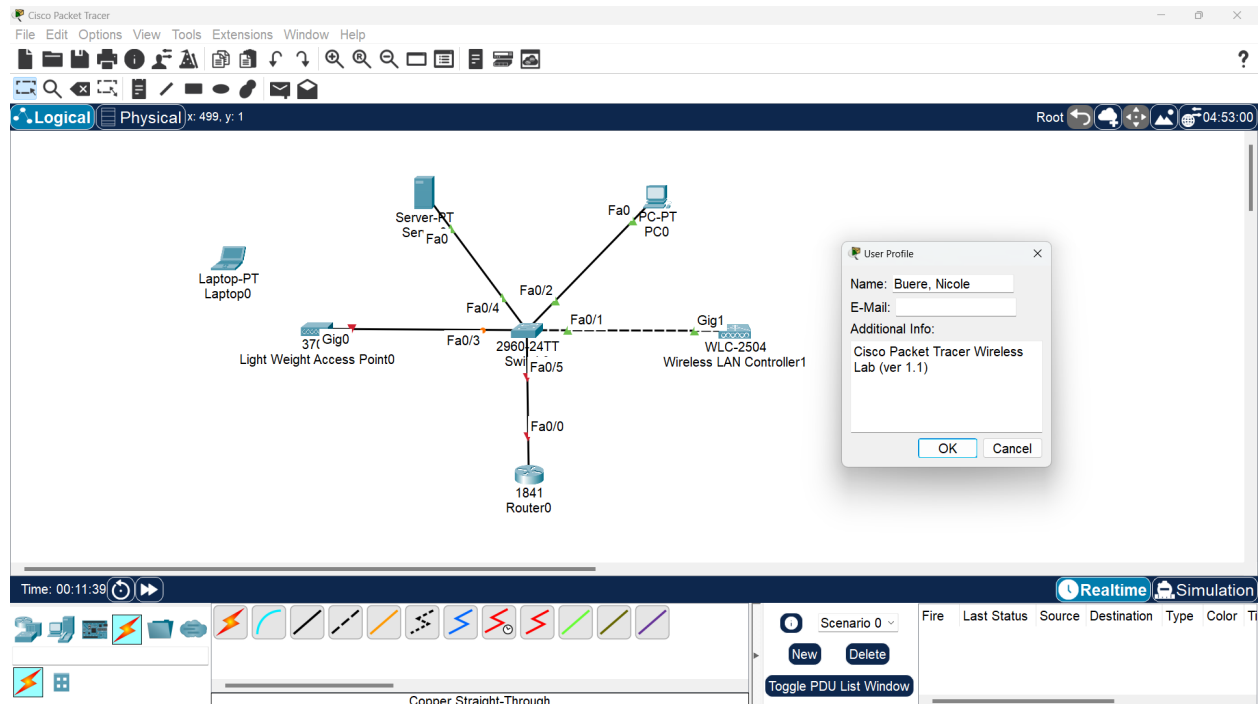

2.

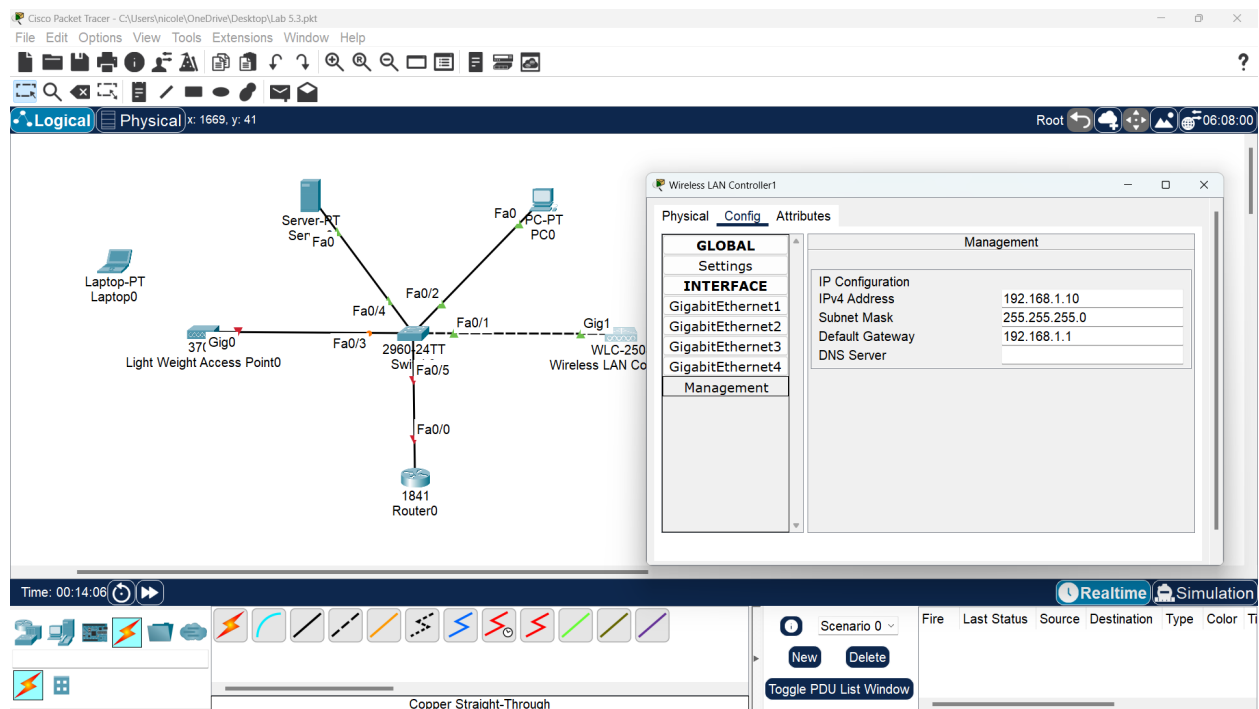

3.

Cisco Packet Tracer - C:\Users\nicole\OneDrive\Desktop\Lab 5.3.pkt

File Edit Options View Tools Extensions Window Help

Logical Physical x: 1271, y: 659

Time: 00:18:48

Realtime Simulation

Scenario 0 New Delete Toggle PDU List Window

Copper Straight-Through

PC0

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ipconfig

FastEthernet0 Connection:(default port)

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address...: FE80::2D0:58FF:FEE4:B101
    IPv6 Address...:
    IPv4 Address...: 192.168.1.100
    Subnet Mask...: 255.255.255.0
    Default Gateway...: 0.0.0.0

Bluetooth Connection:

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address...:
    IPv6 Address...:
    IPv4 Address...: 0.0.0.0
    Subnet Mask...: 0.0.0.0
    Default Gateway...: 0.0.0.0
```

Cisco Packet Tracer - C:\Users\nicole\OneDrive\Desktop\Lab 5.3.pkt

File Edit Options View Tools Extensions Window Help

Logical Physical x: 1060, y: 520

Time: 00:18:00

Realtime Simulation

Scenario 0 New Delete Toggle PDU List Window

Copper Straight-Through

PC0

Physical Config Desktop Programming Attributes

Command Prompt

```
Subnet Mask...: 0.0.0.0
Default Gateway...: 0.0.0.0

C:\>ping 192.168.1.100

Pinging 192.168.1.100 with 32 bytes of data:

Reply from 192.168.1.100: bytes=32 time<1ms TTL=128
Reply from 192.168.1.100: bytes=32 time=3ms TTL=128
Reply from 192.168.1.100: bytes=32 time=1ms TTL=128
Reply from 192.168.1.100: bytes=32 time=2ms TTL=128

Ping statistics for 192.168.1.100:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 3ms, Average = 1ms

C:\>ping 192.168.1.10



Pinging 192.168.1.10 with 32 bytes of data:

Request timed out.
Reply from 192.168.1.10: bytes=32 time<1ms TTL=255
Reply from 192.168.1.10: bytes=32 time<1ms TTL=255
Reply from 192.168.1.10: bytes=32 time<1ms TTL=255

Ping statistics for 192.168.1.10:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

4.

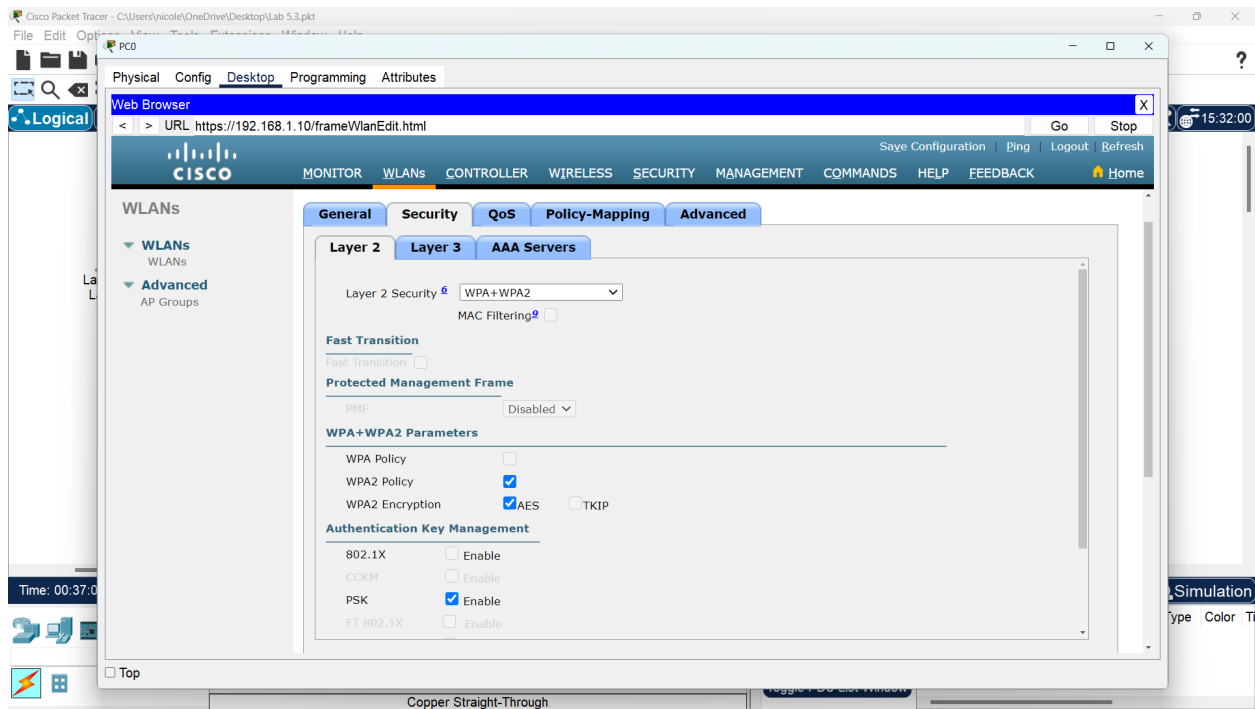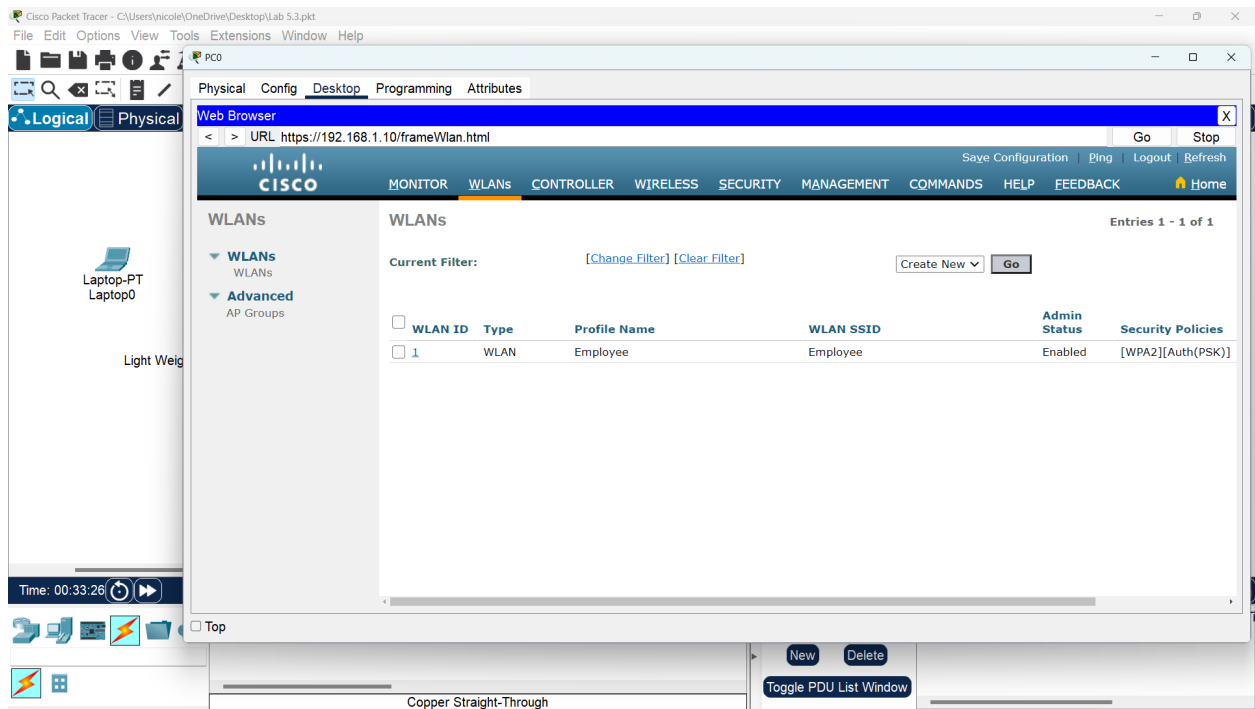

5.

Cisco Packet Tracer - C:\Users\nicole\OneDrive\Desktop\Lab 5.3.pkt

File Edit Options View Tools Extensions Window Help

Logical Physical x: 1013, y: 584

Time: 00:38:53

Copper Straight-Through

Server0

Physical Config Services Desktop Programming Attributes

GLOBAL Settings

Algorithm Settings

INTERFACE

FastEthernet0

Port Status ☐ On ☒ Off

Bandwidth ☐ 100 Mbps ☐ 10 Mbps ☒ Auto

Duplex ☐ Half Duplex ☐ Full Duplex ☒ Auto

MAC Address 0001.97D0.E055

IP Configuration

☐ DHCP

☒ Static

IPv4 Address 192.168.1.20

Subnet Mask 255.255.255.0

IPv6 Configuration

☐ Automatic

☒ Static

IPv6 Address

Link Local Address: FE80::201:97FF:FED0:E055

Toggle PDU List Window

Cisco Packet Tracer - C:\Users\nicole\OneDrive\Desktop\Lab 5.3.pkt

File Edit Options View Tools Extensions Window Help

Logical Physical x: 495, y: 603

Time: 00:42:02

Copper Straight-Through

Server0

Physical Config Services Desktop Programming Attributes

SERVICES

HTTP

DHCP

DHCPv6

TFTP

DNS

SYSLOG

AAA

NTP

EMAIL

FTP

IoT

VM Management

Radius EAP

DHCP

Interface FastEthernet0 Service ☒ On ☐ Off

Pool Name serverPool

Default Gateway 0.0.0.0

DNS Server 0.0.0.0

Start IP Address : 192 168 1 101

Subnet Mask: 255 255 255 0

Maximum Number of Users : 100

TFTP Server: 0.0.0.0

WLC Address: 0.0.0.0



Add Save Remove

Pool Name	Default Gateway	DNS Server	Start IP Address	Subnet Mask	Max User	TFTP Server	WLC Address
serverPool	0.0.0.0	0.0.0.0	192.168.1.101	255.255.255.0	100	0.0.0.0	0.0.0.0


New Delete

Toggle PDU List Window

6.

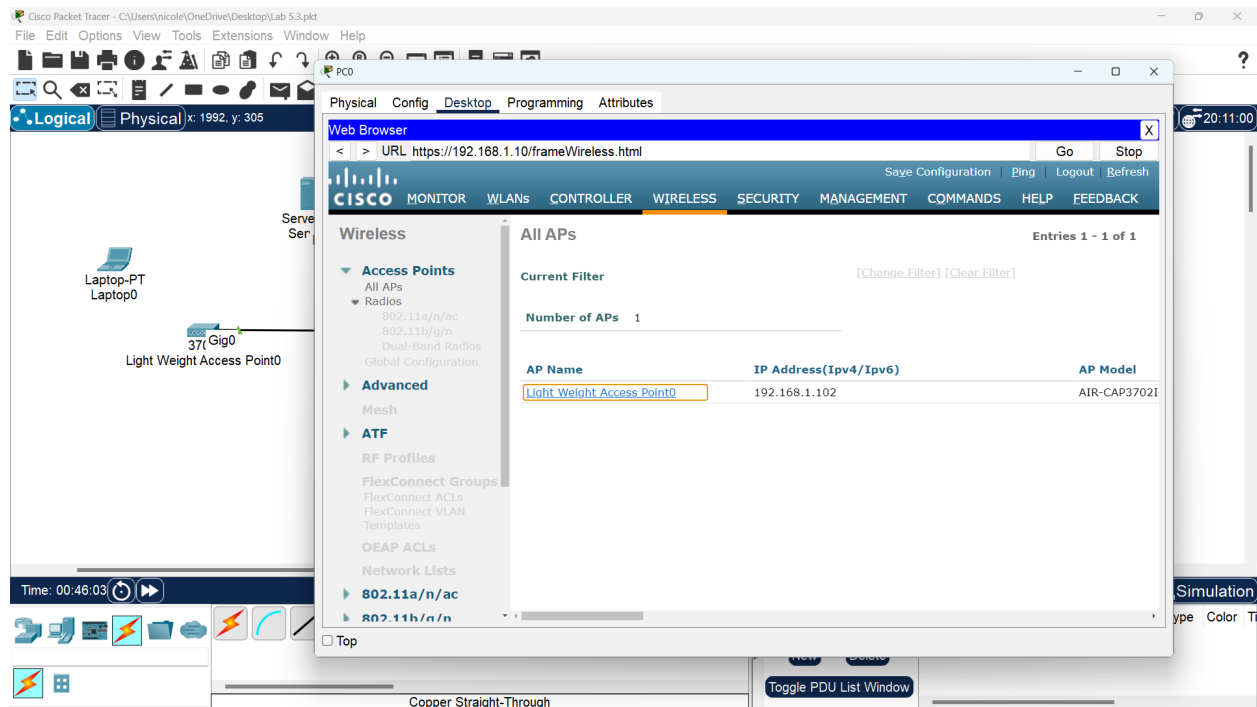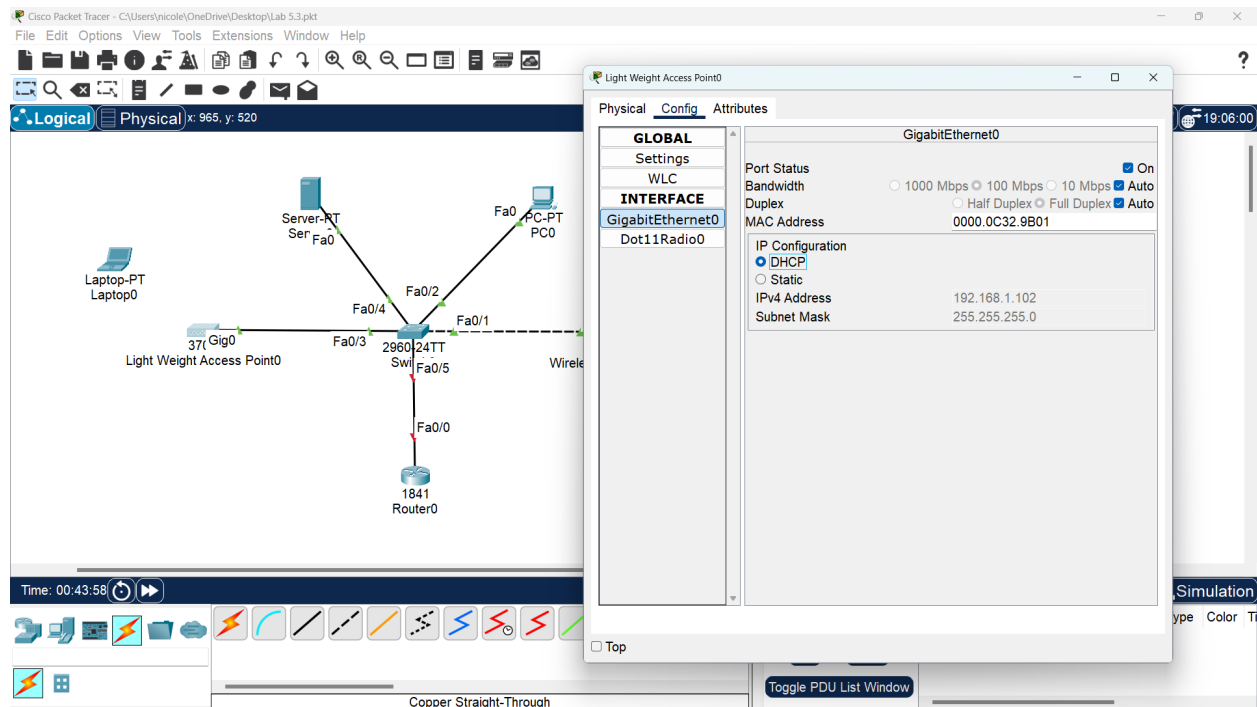

7.

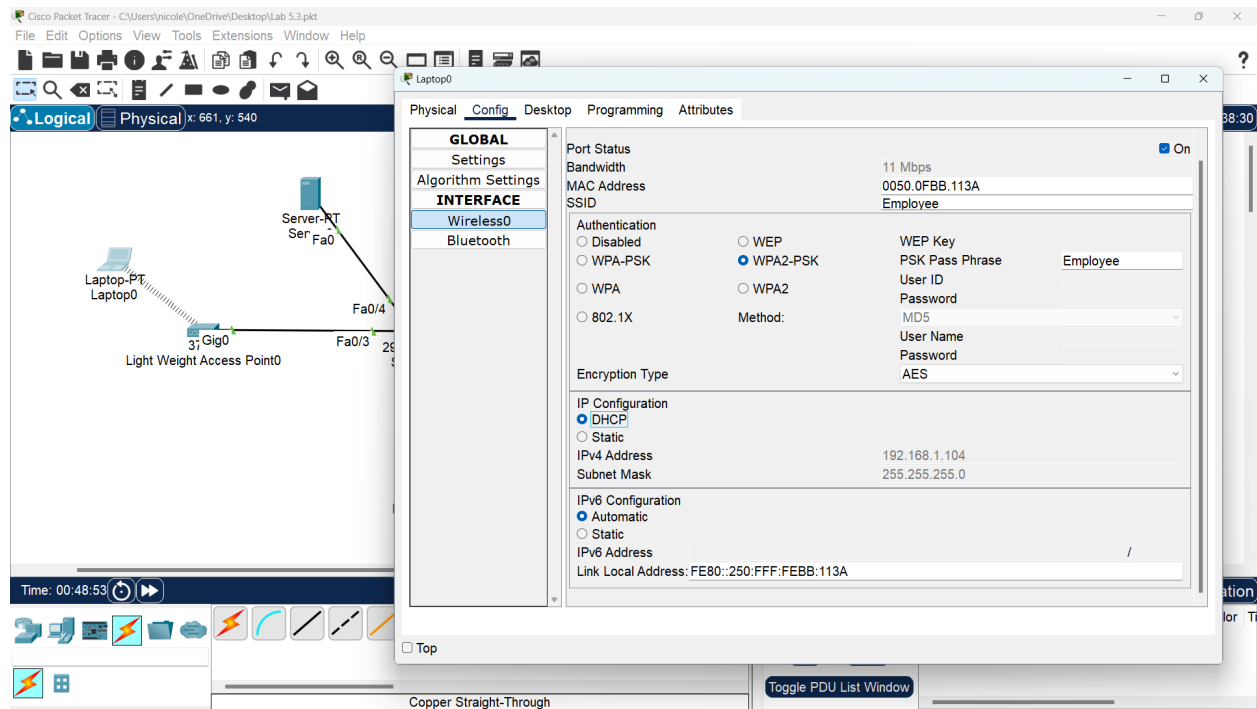

8.

