SE SERIES

1- 3-IN-1 ABSOLUTE OIL CLEANING
2- INCREASING MACHINE RELIABILITY & MACHINE PRODUCTIVITY.
3- ENVIRONMENTAL RESPONSIBILITY

FEATURES:

- Compact and light off-line bypass oil cleaners.
- 3-in1 Oil Filtration = effectively removes all the particles that are very difficult to remove with full flow filters, and a performs an absolute Oil Cleaning by removing solid particles, absorbing water and eliminating sludge and oil oxidation residues.
- Built around a very compact power pack, SE-filters are connected off-line to an oil reservoir
- Low running cost, easy installation & maintenance.
- Available in various setups, various motor versions and ATEX certified.

BENEFITSP:

- Improves productivity and machine reliability.
- Prevents breakdowns to the hydraulic equipments.
- Longer life of all hydraulic components, pumps, servo-valves and other equipment.
- Saves significantly on oil consumption by extending oil life, up to 50.000 hrs. or 10 years. '
- Very important reduction of the oil consumption
- cost and the resulting waste oil expenses.
- Discharges the very expensive full flow filters and extends their life (50% - 80% cost saving!).
- Significant reduction of maintenance expenditures.

ENVIRONMENTAL PROTECTION:

- Triple R filters effectively clean the oil (down to NAS 6 or ISO 15/12) and stabilize the oil condition.
- That results in a significant increase of oil life and a significant reduction of oil consumption and oil disposal cost.
- Practice has proven that 50.000 hours of operation, or oil usage for up to 10 years can be achieved while maintaining all the oil properties.

TYPICAL APPLICATIONS:

- Injection moulding machines.
- Die-casting machines, metal working machines, like bending-, cutting-, punching machines.
- Construction machinery and other mobile hydraulic machinery.
- Al hydraulic systems with continuous pressure and fitted with proportional valves, servo-valves and other high-tech hydraulic equipment

TECHNICAL SPECIFICATIONS:

MODEL*	SE50E-BH	SE100E-BH	SE200E-BH	SE400E-BH	SE600E-BH
Article nr.	SE50BH	SE100BH	SE200BH	SE400BH	SE600BH
Flow rare	1,6 l/m	2,5 l/m	5,0 l/m	9,0 l/m	12,0 l/m
Motor	230Vx1 or 400x3, 50/60 Hz				
Power	0,12 kW (230V) - 0,18 kW (400V)			0,37 kw	
Thread In/Out	1/2" IN and OUT				3/4" IN - 1/2" OUT
Element type	50 size M - E - X	100 size, M - E - X - D - WE type			
Nr. of elements	1	1	2	4	6
Max pressure					
Weight kg	17,0	17,4	23,0	40,0	50,0
Dimension mm	363 x 230 x 460	385 x 230 x 460	470 x 400 x 370	610 x 470 x 370	1080 x 470 x 370

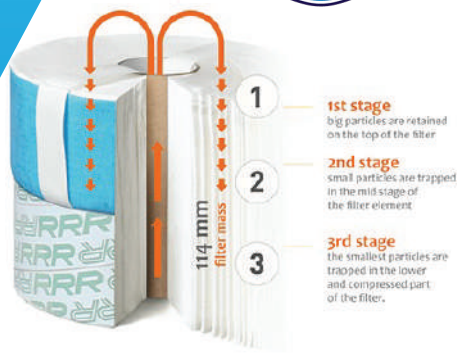

FILTER MODEL SELECTION CHART:

MODEL *	500 LITER	750L	1000L	1500 L	2000 L	4000 L	6000 L
SE50E-BH							
SE100E-BH							
SE200E-BH							
SE400E-BH							
SE600E-BH							

. Selection criteria can be different depending on the machine condition and machine environment, the type of oil and the operation conditions (gray area)

CONNECTING OFF-LINE TO AN OIL RESERVOIR:

All SE - Filter systems are CE-certified.
Please consult our instruction manual before connecting the SE-filters to your machinery.