

Wood Dyer

NC PUTTY

GENERAL DESCRIPTION

WOOD DYER NC Putty is a premium-grade, fast-drying nitro-cellulose-based filler designed to fill grain imperfections, pores, cracks, and minor surface defects on wooden and industrial substrates. It offers exceptional filling properties, outstanding adhesion, and effortless sanding characteristics, leaving an incredibly smooth and level base for subsequent coating layers

PACK SIZE

0.91 Litre

COLOUR RANGE

Off-White / Grey / Wood-toned

WATER RESISTANCE

Excellent resistance to atmospheric humidity once fully dried and top-coated.

VOLUME SOLIDS

45± 2% (nominal)

FILM THICKNESS/COAT

Wet: 100-150 Micrometers

Dry: 50-75 Micrometers

DRYING TIMES

Depends on temperature, humidity, air movements and film thickness.

TOUCH DRY

15-20 Minutes

RECOAT

1-1.5 Hours

THEORETICAL COVERAGE

A guide to the theoretical coverage which can be achieved under normal conditions is 7-9m²/litre/coat.

APPLICATION

Putty Knife / Scraper

CONVENTIONAL SPRAY

Ready to use (not recommended for spray application unless thinned substantially for specialized equipment)

CLEANING UP


Clean all equipment with WOOD DYER's Wood Thinner immediately after use.

SURFACE PREPARATION

Ensure surfaces are clean, completely dry, and structurally sound. Remove all loose dust, wax, grease, oil, and sanding debris. Apply directly onto bare wood or seasoned primer coats, and sand down thoroughly using abrasive paper once completely dry before applying the next coat.

SAFETY HEALTH AND ENVIRONMENTAL FORMATION

Highly flammable; keep container sealed, upright, and away from children, ignition sources, food, and extreme temperatures. Wear protective gear during use, avoid inhalation and contact with skin or eyes, and ensure good ventilation. Dispose of waste responsibly; toxic to aquatic life and may cause long-term harm.

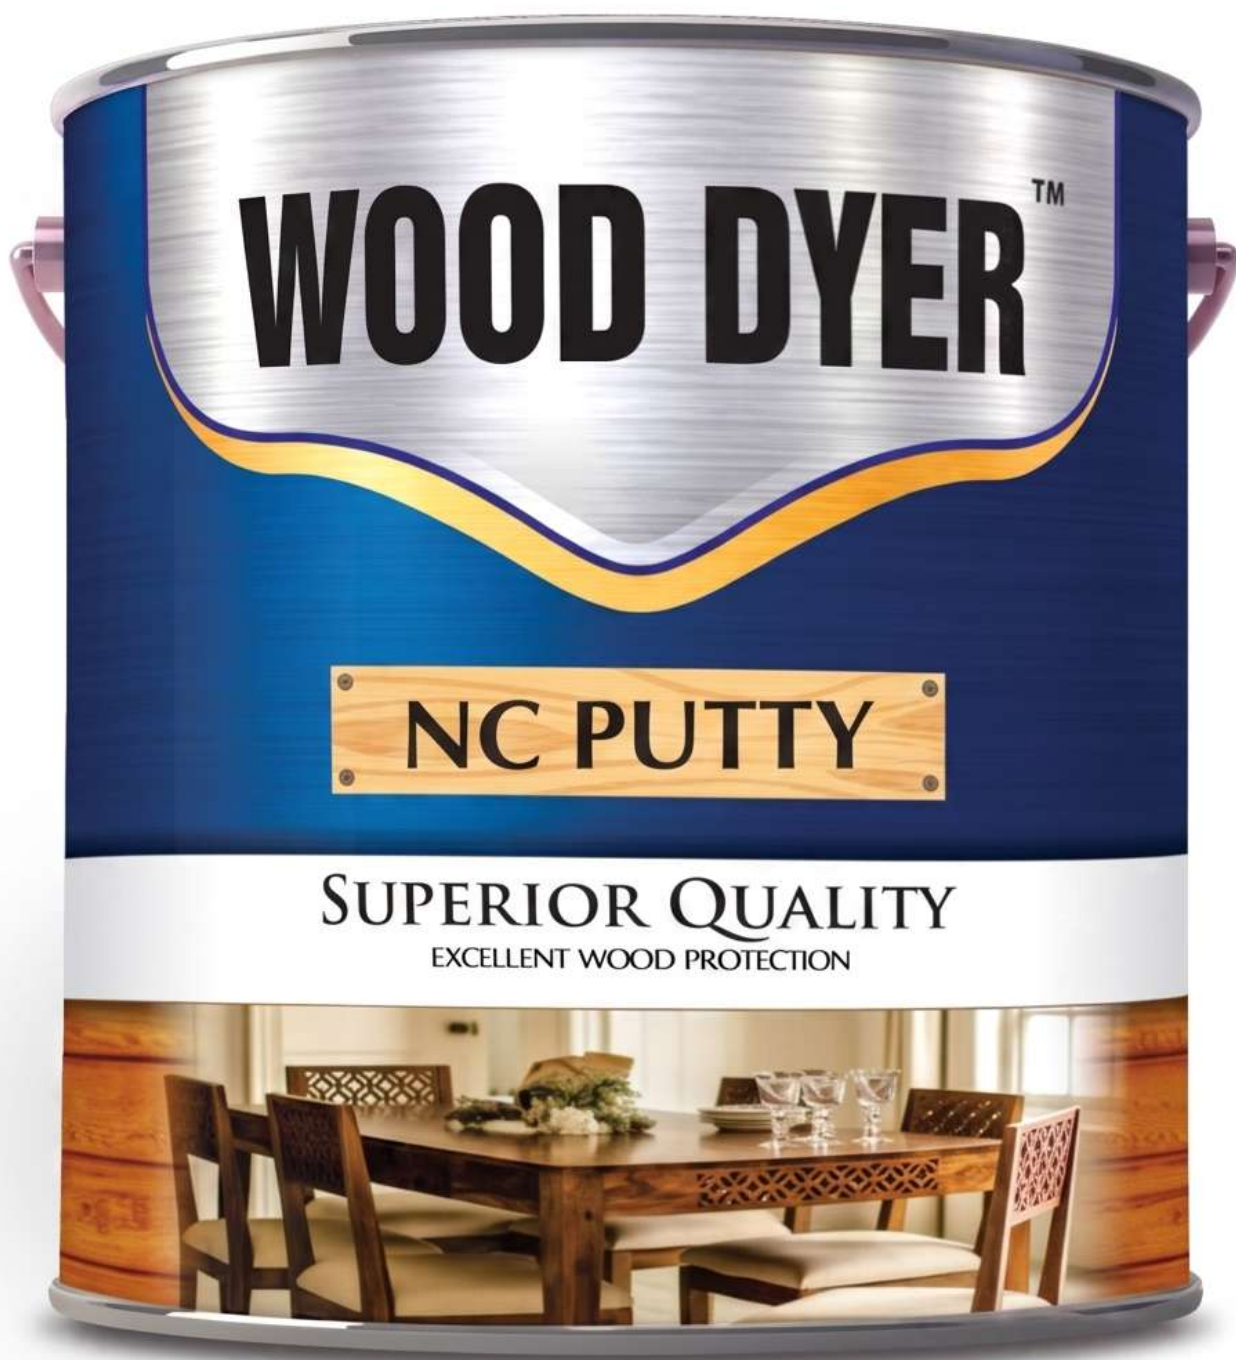

NC PUTTY

CODE NA : 0004