

Wood Dyer

Synthetic Varnish

GENERAL DESCRIPTION

WOOD DYER Varnish has a high gloss finish and has excellent abrasion resistance. WOOD DYER Varnish is a solvent-based varnish suitable for use on all type of new or previously treated wood and metal. Typical use includes paneling, cane or wood furniture, windows, door and partitions.

PACK SIZE

0.25 Litre, 0.91 Litre and 3 Litres.

COLOUR RANGE

Clear

WATER RESISTANCE

Resistant to the levels of atmospheric humidity present in normal environment.

VOLUME SOLIDS

32± 2% (nominal)

FILM THICKNESS/COAT

Wet: 50-75 Micrometers

Dry: 17-25 Micrometers

DRYING TIMES

Depends on temperature, humidity, air movements and film thickness.

TOUCH DRY

2-4 Hours.

RECOAT

6-8 Hours

THEORETICAL COVERAGE

A guide to the theoretical coverage which can be achieved under normal conditions is 14-20m²/litre/coat.

APPLICATION

Brush, Roller or Spray

CONVENTIONAL SPRAY

30-40% with WOOD DYER's Wood Thinner.

CLEANING UP


Clean all equipment with mineral turpentine immediately after use.

SURFACE PREPARATION

Surfaces that are new, bare, old, or previously painted need to be clean, dry, and free from wax, dust, rust, and any other unwanted materials. Apply WOOD DYER's Synthetic Varnish to the surfaces and let them dry. After each coat, sand the surface with abrasive paper.

SAFETY HEALTH AND ENVIRONMENTAL FORMATION

Highly flammable; keep container sealed, upright, and away from children, ignition sources, food, and extreme temperatures. Wear protective gear during use, avoid inhalation and contact with skin or eyes, and ensure good ventilation. Dispose of waste responsibly; toxic to aquatic life and may cause long-term harm.

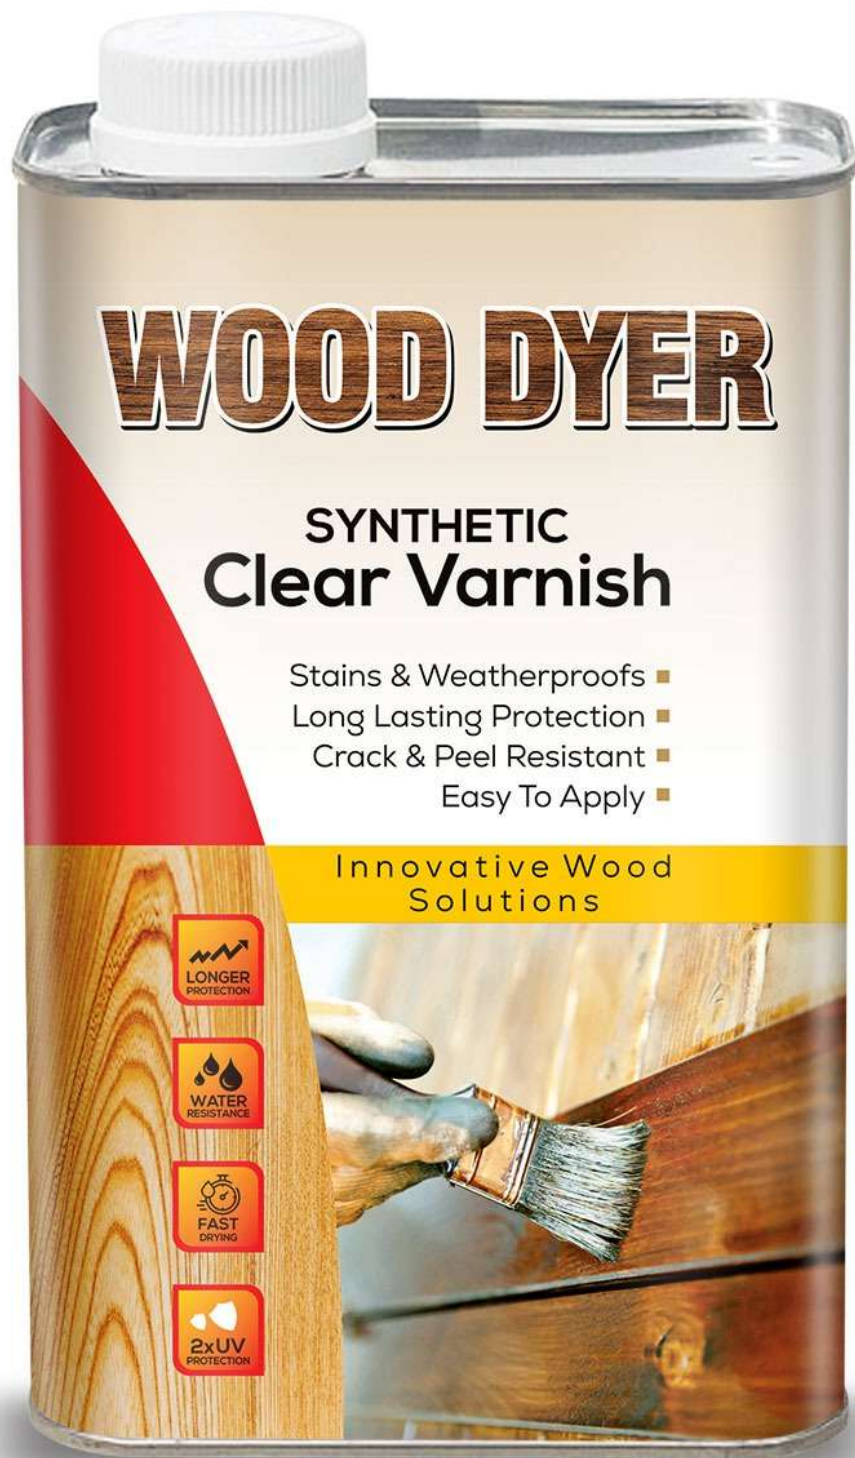

Synthetic Clear Varnish

CODE NA : 0008