



Ombré Paints
Sequence of Colors

WOOD DYER

COMPANY
PRODUCT
CATALOG



WELCOME, OMBRÉ PAINTS

Welcome to OMBRÉ PAINTS, where craftsmanship meets innovation in our comprehensive product portfolio designed to elevate every woodworking project. With a focus on quality and performance, our range includes the essentials every woodworker relies on **WOOD DYER**: Sealer, Lacquer, Thinner, Elfi Varnish, and Synthetic Clear Varnish. Whether you're a seasoned professional or a passionate hobbyist, our products are meticulously crafted to enhance the beauty and longevity of your creations, ensuring that every piece showcases the natural allure of wood with unmatched clarity and resilience. Trust WOOD DYER for professional-grade solutions tailored to meet the diverse needs of artisans, craftsmen, and enthusiasts alike.

TABLE OF CONTENTS

WOOD SEALER	04
-------------	----

WOOD LACQUER	06
--------------	----

WOOD COLOUR	08
-------------	----

NC PUTTY	10
----------	----

NC PRIMER	12
-----------	----

WOOD THINNER	14
--------------	----

POLYURETHANE VARNISH	16
----------------------	----

SYNTHETIC VARNISH	18
-------------------	----

Wood Dyer

Wood Sealer

GENERAL DESCRIPTION

WOOD DYER Sealer penetrates and seals wood grain fibers for easy sanding. It enhances and warms the grain giving the look of natural wood. It is nitrocellulose based fast drying and bonding undercoat. Sanding Sealer can be used on plywood, furniture and bare timber work over new or previously finished surface.

PACK SIZE

0.91 Litre and 3.64 Litres.

COLOUR RANGE

Clear

WATER RESISTANCE

Resistant to the levels of atmospheric humidity present in normal environment.

VOLUME SOLIDS

32± 2% (nominal)

FILM THICKNESS/COAT

Wet: 50-75 Micrometers

Dry: 17-25 Micrometers

DRYING TIMES

Depends on temperature, humidity, air movements and film thickness.

TOUCH DRY

15-20 Minutes

RECOAT

1-1.5 Hours

THEORETICAL COVERAGE

A guide to the theoretical coverage which can be achieved under normal conditions is 11-13m²/litre/coat.

APPLICATION

Spray

CONVENTIONAL SPRAY

100-150% with WOOD DYER's Wood Thinner.

CLEANING UP


Clean all equipment with WOOD DYER's Wood Thinner immediately after use.

SURFACE PREPARATION

Surfaces that are new, bare, old, or previously painted need to be clean, dry, and free from wax, dust, rust, and any other unwanted materials. Apply WOOD DYER's Wood Sealer to the surfaces and let them dry. After each coat, lightly sand the surface with abrasive paper.

SAFETY HEALTH AND ENVIRONMENTAL FORMATION

Highly flammable; keep container sealed, upright, and away from children, ignition sources, food, and extreme temperatures. Wear protective gear during use, avoid inhalation and contact with skin or eyes, and ensure good ventilation. Dispose of waste responsibly; toxic to aquatic life and may cause long-term harm.

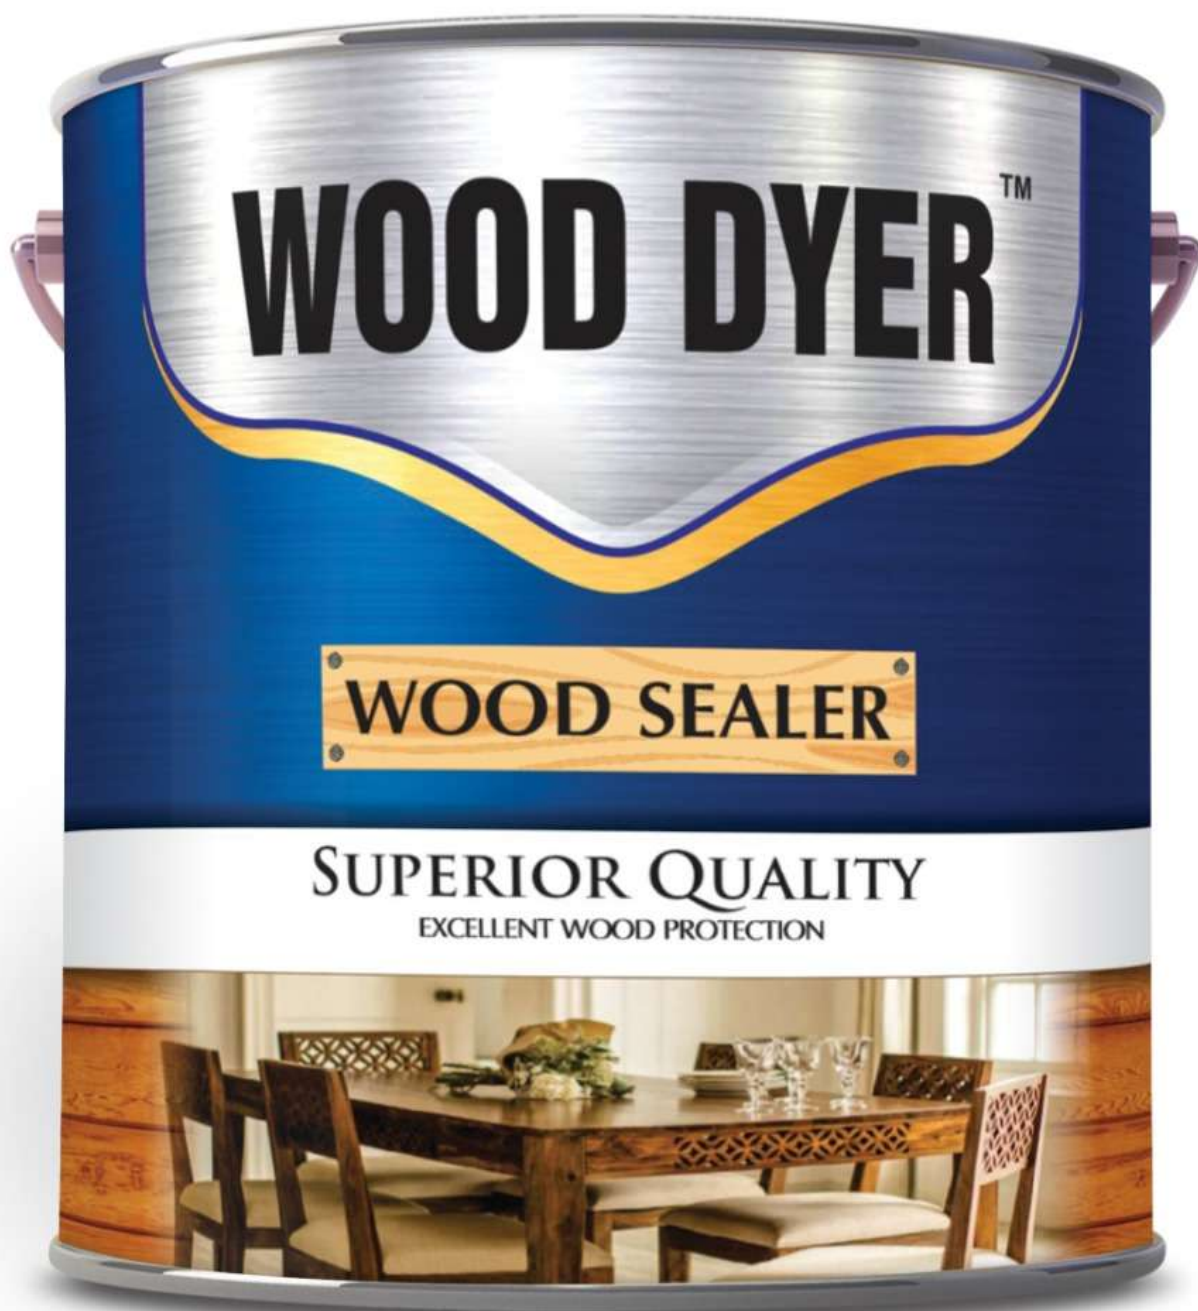

Wood Sealer

CODE NA : 0001

Wood Dyer

Wood Lacquer

GENERAL DESCRIPTION

WOOD DYER Lacquer is high quality, fast drying, clear topcoat lacquer for wooden surfaces. It gives beautiful Matt finish without hiding the wood grains. It is used on soft wood, hard wood, plywood, furniture, timber works such as doors, windows, tables, cupboards etc. It gives slip effects on the surface applied.

PACK SIZE

0.91 Litre and 3.64 Litres.

COLOUR RANGE

Clear

WATER RESISTANCE

Resistant to the levels of atmospheric humidity present in normal environment.

VOLUME SOLIDS

32± 2% (nominal)

FILM THICKNESS/COAT

Wet: 50-75 Micrometers

Dry: 17-25 Micrometers

DRYING TIMES

Depends on temperature, humidity, air movements and film thickness.

TOUCH DRY

15-20 Minutes

RECOAT

1-1.5 Hours

THEORETICAL COVERAGE

A guide to the theoretical coverage which can be achieved under normal conditions is 11-13m²/litre/coat.

APPLICATION

Spray

CONVENTIONAL SPRAY

100-150% with WOOD DYER's Wood Thinner.

CLEANING UP

Clean all equipment with WOOD DYER's Wood Thinner immediately after use.

SURFACE PREPARATION

Surfaces that are new, bare, old, or previously painted need to be clean, dry, and free from wax, dust, rust, and any other unwanted materials. Apply WOOD DYER's Wood Lacquer to the surfaces and let them dry. After each coat, lightly sand the surface with abrasive paper.

SAFETY HEALTH AND ENVIRONMENTAL FORMATION

Highly flammable; keep container sealed, upright, and away from children, ignition sources, food, and extreme temperatures. Wear protective gear during use, avoid inhalation and contact with skin or eyes, and ensure good ventilation. Dispose of waste responsibly; toxic to aquatic life and may cause long-term harm.



Wood Lacquer

CODE NA : 0002

Wood Dyer

Wood Colour

GENERAL DESCRIPTION

WOOD DYER Wood Colour is a premium-quality, fast-drying, highly transparent wood stain formulated to enhance and highlight the natural grain patterns of all types of wood surfaces. It provides deep penetration and rich coloration without obscuring the wood's inherent beauty. It is ideal for use on soft wood, hard wood, plywood, furniture, doors, windows, and high-end cabinetry

PACK SIZE

0.91 Litre and 3.64 Litres.

COLOUR RANGE

Available in a wide range of standard wood shades

WATER RESISTANCE

Designed to be over-coated; provides excellent structural stability against normal atmospheric humidity when sealed.

VOLUME SOLIDS

12± 2% (nominal)

FILM THICKNESS/COAT

Wet: 30-45 Micrometers

Dry: 17-25 Micrometers

DRYING TIMES

Depends on temperature, humidity, air movements and film thickness.

TOUCH DRY

15-20 Minutes

RECOAT

20-30 Minutes

THEORETICAL COVERAGE

A guide to the theoretical coverage which can be achieved under normal conditions is 12-14m²/litre/coat.

APPLICATION

Spray, Ragging, or Brush

CONVENTIONAL SPRAY

100-150% with WOOD DYER's Wood Thinner.

CLEANING UP

Clean all equipment with WOOD DYER's Wood Thinner immediately after use.

SURFACE PREPARATION

Surfaces that are new, bare, old, or previously painted need to be clean, dry, and free from wax, dust, rust, and any other unwanted materials. Apply WOOD DYER's Wood Lacquer to the surfaces and let them dry. After each coat, lightly sand the surface with abrasive paper.

SAFETY HEALTH AND ENVIRONMENTAL FORMATION

Highly flammable; keep container sealed, upright, and away from children, ignition sources, food, and extreme temperatures. Wear protective gear during use, avoid inhalation and contact with skin or eyes, and ensure good ventilation. Dispose of waste responsibly; toxic to aquatic life and may cause long-term harm.



Wood Color

CODE NA : 0003

Wood Dyer

NC PUTTY

GENERAL DESCRIPTION

WOOD DYER NC Putty is a premium-grade, fast-drying nitro-cellulose-based filler designed to fill grain imperfections, pores, cracks, and minor surface defects on wooden and industrial substrates. It offers exceptional filling properties, outstanding adhesion, and effortless sanding characteristics, leaving an incredibly smooth and level base for subsequent coating layers

PACK SIZE

0.91 Litre

COLOUR RANGE

Off-White / Grey / Wood-toned

WATER RESISTANCE

Excellent resistance to atmospheric humidity once fully dried and top-coated.

VOLUME SOLIDS

45± 2% (nominal)

FILM THICKNESS/COAT

Wet: 100-150 Micrometers

Dry: 50-75 Micrometers

DRYING TIMES

Depends on temperature, humidity, air movements and film thickness.

TOUCH DRY

15-20 Minutes

RECOAT

1-1.5 Hours

THEORETICAL COVERAGE

A guide to the theoretical coverage which can be achieved under normal conditions is 7-9m²/litre/coat.

APPLICATION

Putty Knife / Scraper

CONVENTIONAL SPRAY

Ready to use (not recommended for spray application unless thinned substantially for specialized equipment)

CLEANING UP


Clean all equipment with WOOD DYER's Wood Thinner immediately after use.

SURFACE PREPARATION

Ensure surfaces are clean, completely dry, and structurally sound. Remove all loose dust, wax, grease, oil, and sanding debris. Apply directly onto bare wood or seasoned primer coats, and sand down thoroughly using abrasive paper once completely dry before applying the next coat.

SAFETY HEALTH AND ENVIRONMENTAL FORMATION

Highly flammable; keep container sealed, upright, and away from children, ignition sources, food, and extreme temperatures. Wear protective gear during use, avoid inhalation and contact with skin or eyes, and ensure good ventilation. Dispose of waste responsibly; toxic to aquatic life and may cause long-term harm.

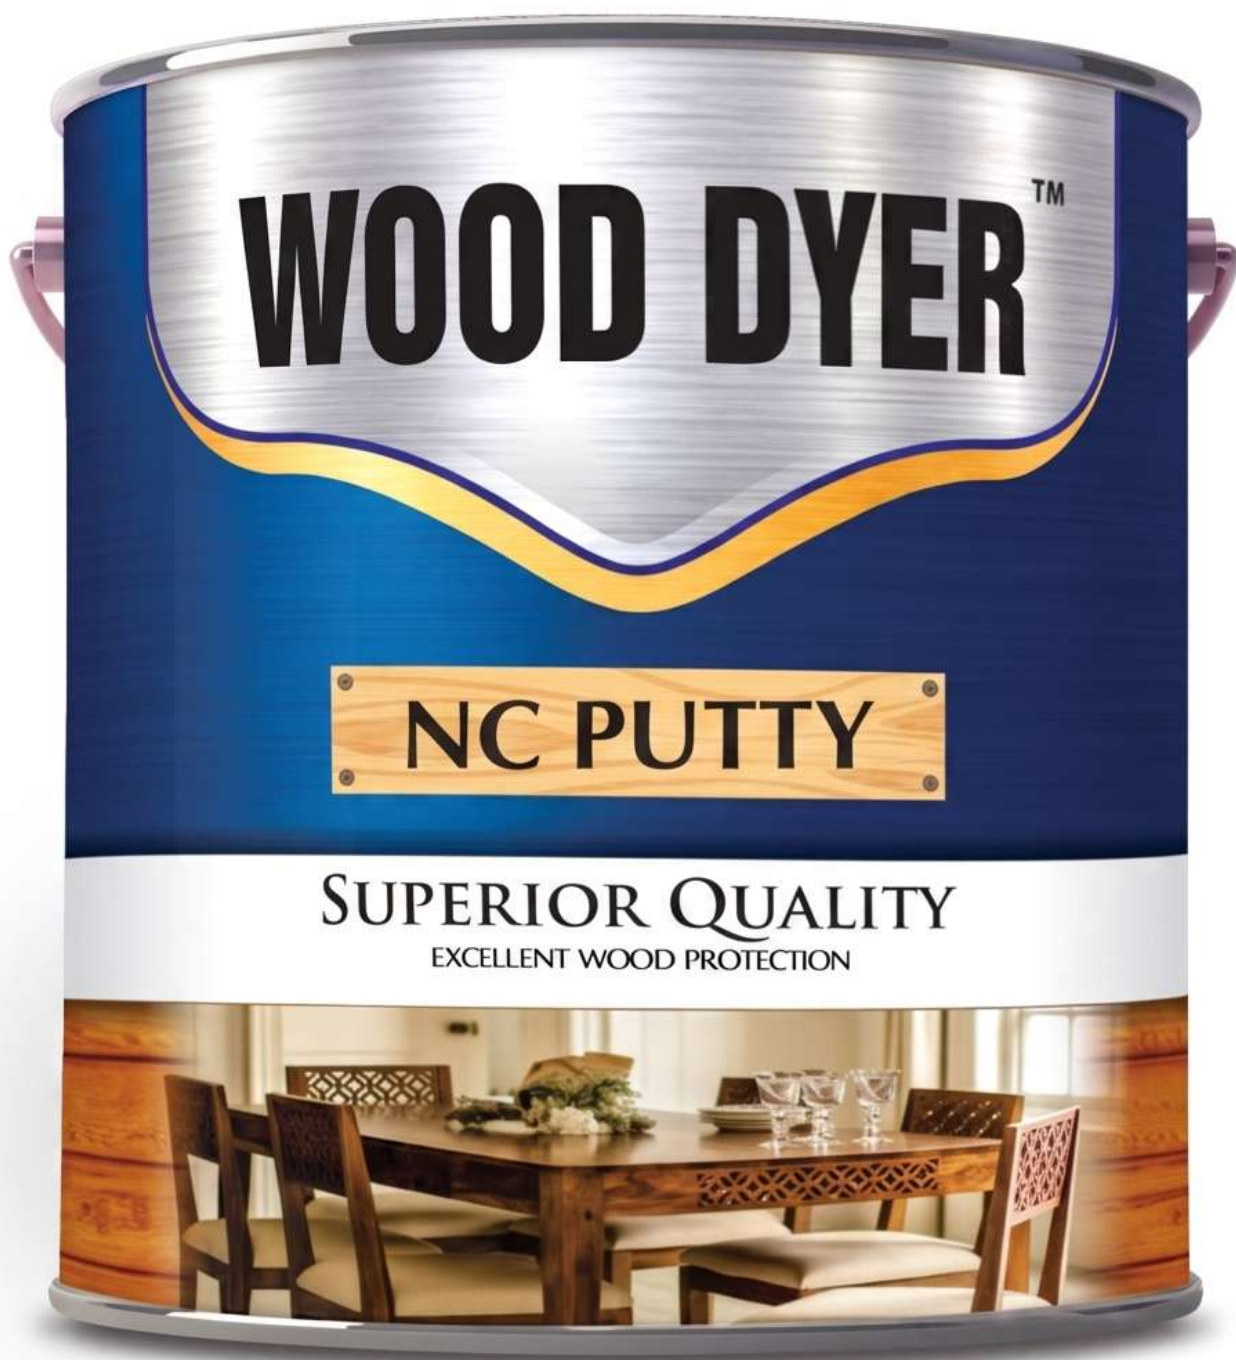

NC PUTTY

CODE NA : 0004

Wood Dyer

NC PRIMER

GENERAL DESCRIPTION

WOOD DYER NC Primer is a high-performance, rapid-drying nitrocellulose primer formulated to provide a superior under-coat layer on wood and related interior surfaces. It exhibits excellent sealing capability, high build, good hold-out for topcoats, and remarkably easy dry-sanding properties. It establishes an ideal bond between the raw substrate (or putty) and the final lacquer finish..

PACK SIZE

0.91 Litre

COLOUR RANGE

Grey / White

WATER RESISTANCE

Resistant to the levels of atmospheric humidity present in normal environment.

VOLUME SOLIDS

38± 2% (nominal)

FILM THICKNESS/COAT

Wet: 80-110 Micrometers

Dry: 30-45 Micrometers

DRYING TIMES

Depends on temperature, humidity, air movements and film thickness.

TOUCH DRY

15-20 Minutes

RECOAT

1-1.5 Hours

THEORETICAL COVERAGE

A guide to the theoretical coverage which can be achieved under normal conditions is 10-12m²/litre/coat.

APPLICATION

Spray

CONVENTIONAL SPRAY

100-150% with WOOD DYER's Wood Thinner.

CLEANING UP

Clean all equipment with WOOD DYER's Wood Thinner immediately after use.

SURFACE PREPARATION

Surfaces that are new, bare, old, or previously painted need to be clean, dry, and free from wax, dust, rust, and any other unwanted materials. Apply WOOD DYER's Wood Lacquer to the surfaces and let them dry. After each coat, lightly sand the surface with abrasive paper.

SAFETY HEALTH AND ENVIRONMENTAL FORMATION

Highly flammable; keep container sealed, upright, and away from children, ignition sources, food, and extreme temperatures. Wear protective gear during use, avoid inhalation and contact with skin or eyes, and ensure good ventilation. Dispose of waste responsibly; toxic to aquatic life and may cause long-term harm.



NC PRIMER

CODE NA : 0005

Wood Dyer

Wood Thinner

GENERAL DESCRIPTION

WOOD DYER Wood Thinner is a solvent-based thinner suitable for use in all Wood Dyer Products (Wood Dyer Wood Sealer, Wood Dyer Wood Lacquer, Wood Dyer Polyurethane Elfi Varnish and Synthetc Varnish).

PACK SIZE

0.9l Litre and 3 Litres.

COLOUR RANGE

Clear

WATER RESISTANCE

Resistant to the levels of atmospheric humidity present in normal environment.

VOLUME SOLIDS

N/A

FILM THICKNESS/COAT

N/A

DRYING TIMES

Depends on temperature, humidity, air movements and film thickness.

TOUCH DRY

N/A

RECOAT

N/A

THEORETICAL COVERAGE

N/A

APPLICATION

Spray

CONVENTIONAL SPRAY

Use WOOD DYER Wood Thinner 100 - 150% in WOOD DYER Products (Wood Dyer Wood Sealer, Wood Dyer Wood Lacquer, Wood Dyer Polyurethane Elfi Varnish and Synthetc Varnish).

CLEANING UP

This is a thinner to be used in WOOD DYER Products (Wood Dyer Wood Sealer, Wood Dyer Wood Lacquer, Wood Dyer Polyurethane Elfi Varnish and Synthetc Varnish).

SAFETY HEALTH AND ENVIRONMENTAL FORMATION

Highly flammable; keep container sealed, upright, and away from children, ignition sources, food, and extreme temperatures. Wear protective gear during use, avoid inhalation and contact with skin or eyes, and ensure good ventilation. Dispose of waste responsibly; toxic to aquatic life and may cause long-term harm.



Wood Thinner

CODE NA : 0006

Wood Dyer

Polyurethane Varnish

GENERAL DESCRIPTION

WOOD DYER Varnish has a high gloss finish and has excellent abrasion resistance. WOOD DYER Varnish is a solvent-based varnish suitable for use on all type of new or previously treated wood and metal. Typical use includes paneling, cane or wood furniture, windows, door and partitions.

PACK SIZE

0.25 Litre, 0.91 Litre and 3 Litres.

COLOUR RANGE

Clear

WATER RESISTANCE

Resistant to the levels of atmospheric humidity present in normal environment.

VOLUME SOLIDS

32± 2% (nominal)

FILM THICKNESS/COAT

Wet: 50-75 Micrometers

Dry: 17-25 Micrometers

DRYING TIMES

Depends on temperature, humidity, air movements and film thickness.

TOUCH DRY

2-4 Hours.

RECOAT

6-8 Hours

THEORETICAL COVERAGE

A guide to the theoretical coverage which can be achieved under normal conditions is 14-20m²/litre/coat.

APPLICATION

Brush, Roller or Spray

CONVENTIONAL SPRAY

30-40% with WOOD DYER's Wood Thinner.

CLEANING UP


Clean all equipment with mineral turpentine immediately after use.

SURFACE PREPARATION

Surfaces that are new, bare, old, or previously painted need to be clean, dry, and free from wax, dust, rust, and any other unwanted materials. Apply WOOD DYER's Polyurethane Varnish to the surfaces and let them dry. After each coat, sand the surface with abrasive paper.

SAFETY HEALTH AND ENVIRONMENTAL FORMATION

Highly flammable; keep container sealed, upright, and away from children, ignition sources, food, and extreme temperatures. Wear protective gear during use, avoid inhalation and contact with skin or eyes, and ensure good ventilation. Dispose of waste responsibly; toxic to aquatic life and may cause long-term harm.

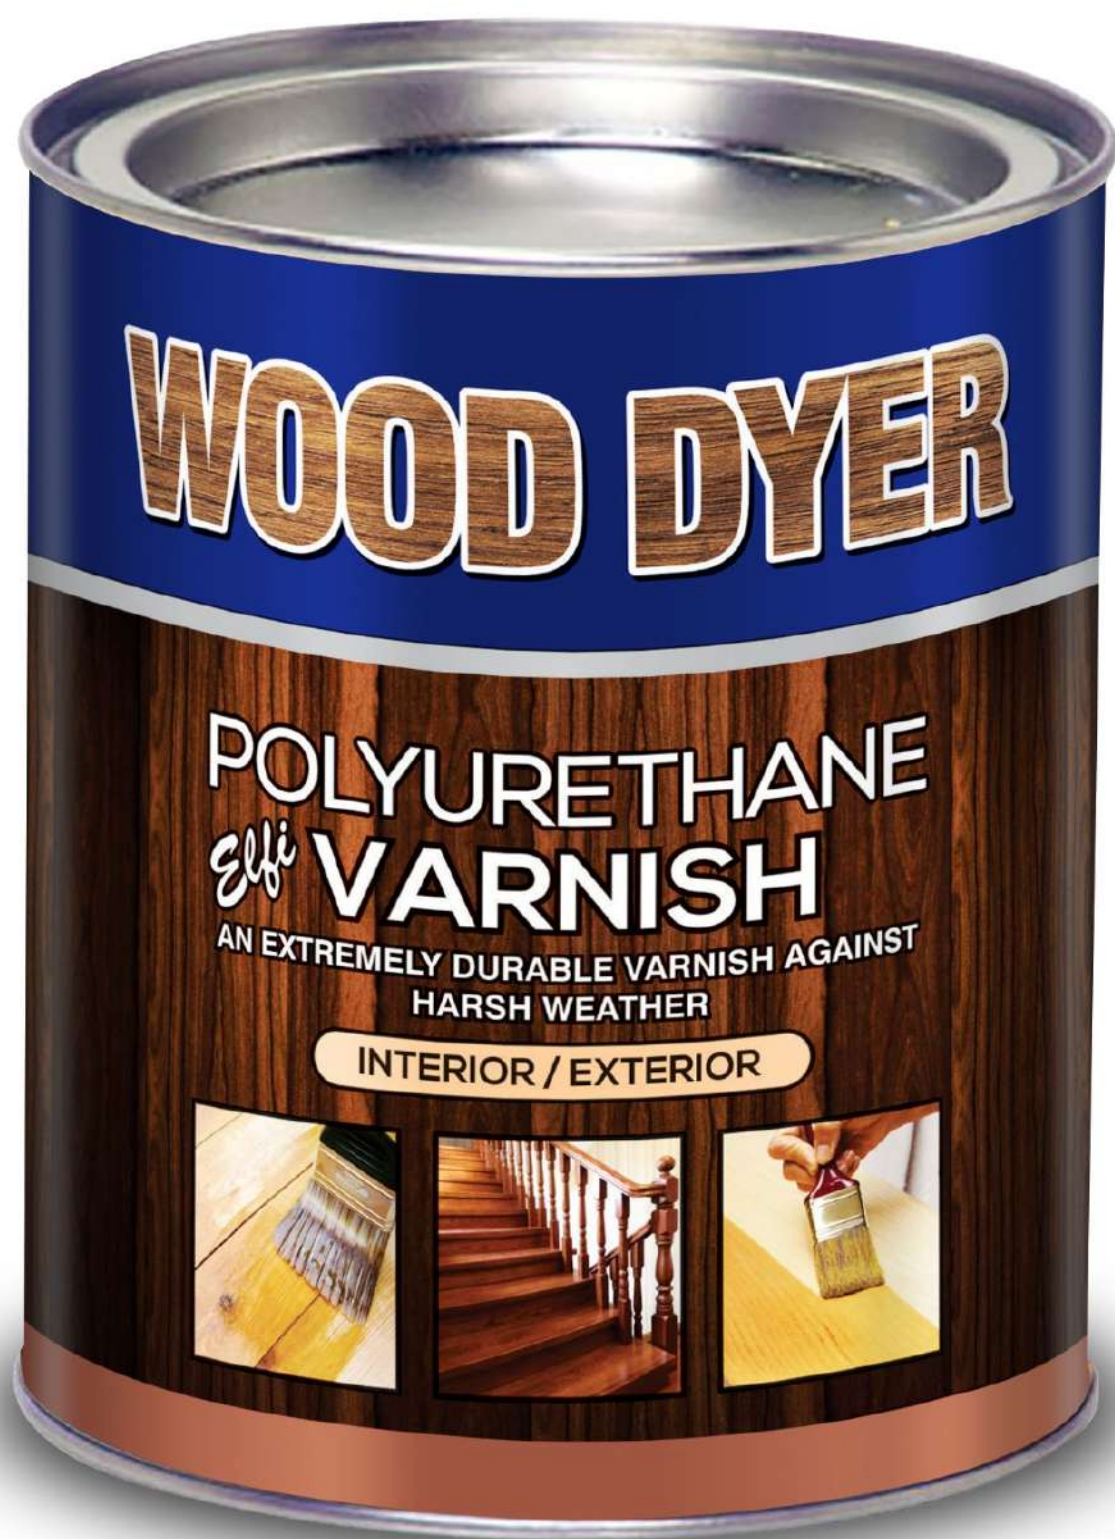

Elfi Varnish

CODE NA : 0007

Wood Dyer

Synthetic Varnish

GENERAL DESCRIPTION

WOOD DYER Varnish has a high gloss finish and has excellent abrasion resistance. WOOD DYER Varnish is a solvent-based varnish suitable for use on all type of new or previously treated wood and metal. Typical use includes paneling, cane or wood furniture, windows, door and partitions.

PACK SIZE

0.25 Litre, 0.91 Litre and 3 Litres.

COLOUR RANGE

Clear

WATER RESISTANCE

Resistant to the levels of atmospheric humidity present in normal environment.

VOLUME SOLIDS

32± 2% (nominal)

FILM THICKNESS/COAT

Wet: 50-75 Micrometers

Dry: 17-25 Micrometers

DRYING TIMES

Depends on temperature, humidity, air movements and film thickness.

TOUCH DRY

2-4 Hours.

RECOAT

6-8 Hours

THEORETICAL COVERAGE

A guide to the theoretical coverage which can be achieved under normal conditions is 14-20m²/litre/coat.

APPLICATION

Brush, Roller or Spray

CONVENTIONAL SPRAY

30-40% with WOOD DYER's Wood Thinner.

CLEANING UP


Clean all equipment with mineral turpentine immediately after use.

SURFACE PREPARATION

Surfaces that are new, bare, old, or previously painted need to be clean, dry, and free from wax, dust, rust, and any other unwanted materials. Apply WOOD DYER's Synthetic Varnish to the surfaces and let them dry. After each coat, sand the surface with abrasive paper.

SAFETY HEALTH AND ENVIRONMENTAL FORMATION

Highly flammable; keep container sealed, upright, and away from children, ignition sources, food, and extreme temperatures. Wear protective gear during use, avoid inhalation and contact with skin or eyes, and ensure good ventilation. Dispose of waste responsibly; toxic to aquatic life and may cause long-term harm.

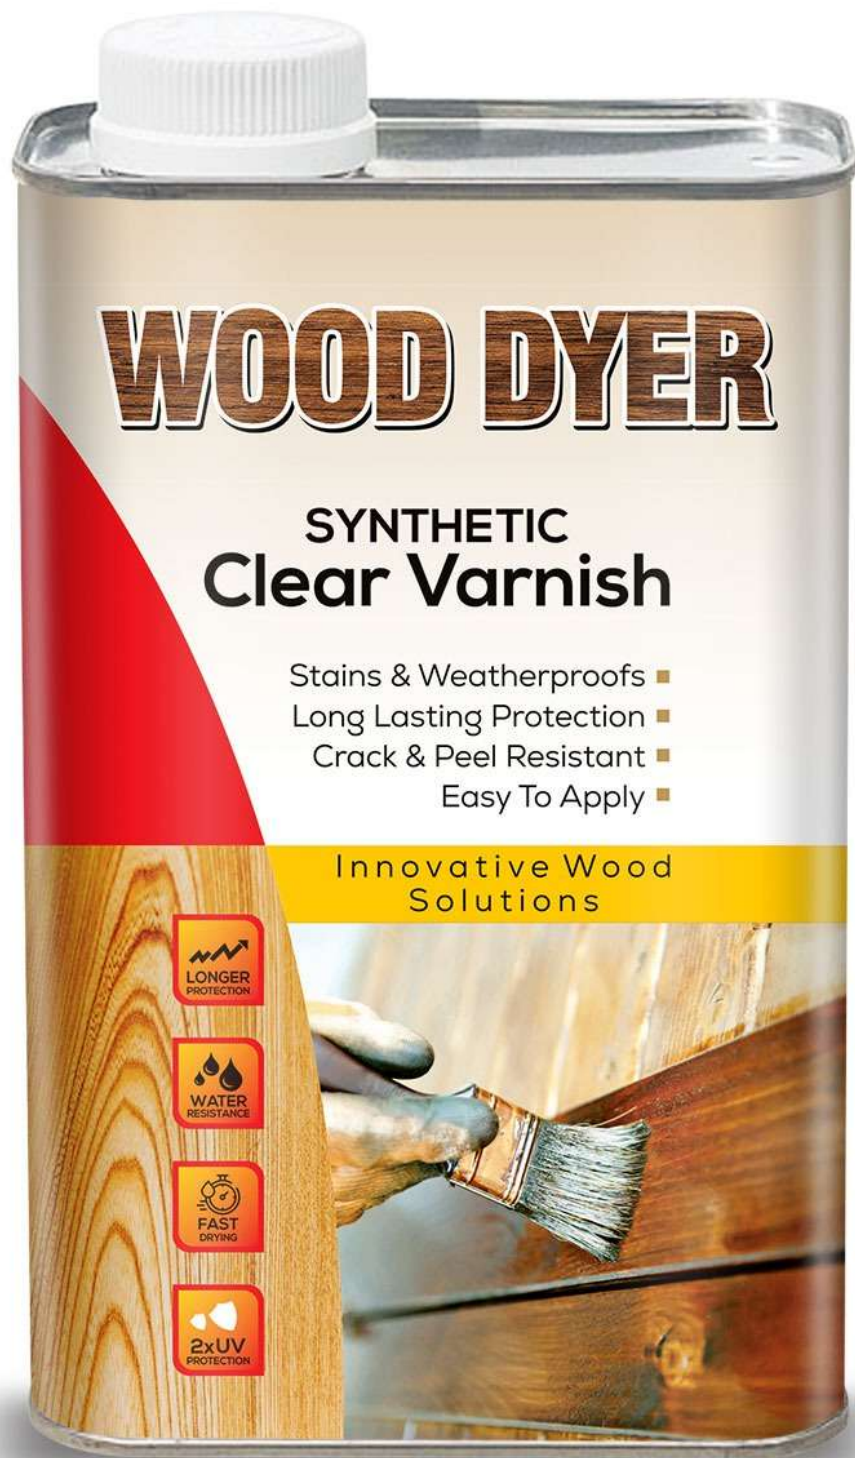

Synthetic Clear Varnish

CODE NA : 0008



COMPANY PRODUCT CATALOG

Elevate your woodworking endeavors with WOOD DYER and let your creations shine with lasting beauty and protection.

2026

- ☎ 0334-9739730
- ✉ shafaykazmi5@gmail.com
- 🌐 www.wooddye.com
- 📍 Sihala, Islamabad, Pakistan