

CONTENTS



GRIMM FIRE PUMP

Company Profile 01-02

Product certification certificate and testing report 03-04

Fire Fighting Pump System

EDJ Fire Pump Set with Electric+Diesel +Jockey 05-06

DJ Fire Pump Set with Diesel +Jockey 07-08

EJ Fire Pump Set with Electric+Jockey 09-10

EEJ Fire Pump Set with dual Electric+Jockey 11-12

EDJ Fire Pump Set with Electric+single cylinder Diesel +Jockey 13-14

Fire Fighting Pump

XBD-L/XBD-W vertical single-stage and direct connection end suction fire pump 15-16

CDL vertical multi-stage centrifugal pump and jockey pump 17-18

XBC-S/XBD-S diesel engine and split end suction pump 19-20

XBC-IS/XBD-IS diesel engine and electric horizontal turbo pump 21-22

XBC-SJ/XBD-SJ diesel engine and electric vertical turbo pump 23-24



GRIMM FIRE PUMP

Grimm Water Treatment (Zhejiang) Co.,Ltd.
Grimm Water Treatment (Zhejiang) Co.,Ltd.
Address: No.2, Weilong Road, Nianli Town, Qujiang District,
Quzhou City, Zhejiang Province
Contact number:+86-15215721057
Email:Grimmpump@163.com





GRIMM FIRE PUMP



GRIMM FIRE PUMP





 211108343007	 中国认可 检测 TESTING CNAS L0463	报告编号: 4W240223 Reference No.:
检测报告 Test Report		
产品名称 Name of products	燃油机复车 _____	
型号规格 Type and specification	GRMBC300-20 _____	
委托单位 Inspected consigner	棉麻脱水处理（浙江）有限公司 _____	
检测类别 Kind of test	委托检测 _____	



浙江泰昌机电股份有限公司
 Zhejiang Taichang Mechanical and Electrical Co., Ltd.
 for Mechanical and Electrical Products Quality Co., Ltd.

		中国认可 标志 TESTING CNAS L0463	报告编号: 4W240225 Reference No.:
211108343007			
检测报告			
Test Report			
产品名称 Name of products	油污类 _____		
型号规格 Type or specification	200WQ360-17-30 _____		
委托单位 Inspected consigner	格瑞特水处理（浙江）有限公司 _____		
检测类别 Kind of test	委托检测 _____		
			
浙江省机电产品质量检测有限公司 Zhejiang Mechanical and Electrical Products Quality Co., Ltd. (for Mechanical and Electrical Products Quality Co., Ltd.)			



GRIMM FIRE PUMP

EDJ Fire Fighting Pump System



PRODUCTS INTRODUCTION

FIRE PUMP SYSTEM

EDJ fire pump consists of an electrically driven end suction centrifugal pump, end suction diesel pump, and vertical pump.S.

Jockey pump, pump and discharge pipeline accessories, and control panel are assembled together. Available traffic range 50-40000 GPM.

Attachments include suction pipes, flanged discharge pipes, batteries, gate valves, check valves, and flexible expansion joints, Pressure switch, pressure gauge, base frame, etc.

ADVANTAGE

Automatically switch between three pumps.

Provide manual and automatic operation.

Can work even during power outages.

Easy to install.

Customized size and pump set.

YE high-efficiency motor, protection level Ip55.

High performance and low power consumption.

The pump casing has an anti-corrosion coating.

Equipped with high-quality NSK bearings and high-temperature wear-resistant mechanical seals.

Pipelines can be provided upon request.

Different installation styles.

Low maintenance costs and sufficient supply of spare parts.

Electronic battery charger.



GRIMM FIRE PUMP

COMBINATORIAL METHOD

THE FIRST COMBINATION



XBC-IS



IS



CONTROLLER



PRESSURE TANK



CDL

THE SECOND COMBINATION



XBC-W



ISW



CONTROLLER



PRESSURE TANK



CDL

THE THIRD COMBINATION



XBC-S



S



CONTROLLER



PRESSURE TANK



CDL



GRIMM FIRE PUMP

DJ Centrifugal Pump Coupled with Diesel Engine



PRODUCTS INTRODUCTION

TECHNICAL DESCRIPTION

More Environmentally Friendly
Meeting China III Emission Standard
Low Fuel Consumption
Strong Power
Easy To Assemble

APPLICATIONS

Pumps suitable for cleaning water and liquids that do not cause chemical corrosion to pump manufacturing materials. Diesel engine pumps are recommended for water supply, cleaning equipment boosting, firefighting equipment, irrigation, industrial applications, water circulation in climate control equipment, and agriculture.

USING LIMITS

Liquid temperature is between -10°C and $+120^{\circ}\text{C}$
Environmental temperature up to $+50^{\circ}\text{C}$
Maximum working pressure 16 bar
Continuous Service S1



GRIMM FIRE PUMP

COMBINATORIAL METHOD

THE FIRST COMBINATION



XBC-W/IS



CONTROLLER



PRESSURE TANK



CDL

THE SECOND COMBINATION



XBC-S



CONTROLLER



PRESSURE TANK



CDL



EJ End Sucton Pump with Control Pannel



PRODUCTS INTRODUCTION

TECHNICAL DESCRIPTION

YE-3 Electric Motor for Pumps

Technical Specifications

Can be offered separately

YE3 high effcient motor with protection IP55 class F

Pump case with Anti-corrosive coating

With quality NSK bearings ,wear resistance mechanical

seal Easy Installation

USING LIMITS

Liquid temperature is between -10°C and $+120^{\circ}\text{C}$

Environmental temperature up to $+50^{\circ}\text{C}$

Maximum working pressure 16 bar

Continuous Service S1



COMBINATORIAL METHOD

THE FIRST COMBINATION



IS



CONTROLLER



PRESSURE TANK



CDL

THE SECOND COMBINATION



ISW



CONTROLLER



PRESSURE TANK



CDL

THE THIRD COMBINATION



S



CONTROLLER



PRESSURE TANK



CDL



EEJ End Sucton Pump with Control Panne



PRODUCTS INTRODUCTION

TECHNICAL DESCRIPTION

YE-3 Electric Motor for Pumps

Technical Specifications

Can be offered separately

YE3 high efficient motor with protection IP55 class F

Pump case with Anti-corrosive coating

With quality NSK bearings, wear resistance mechanical seal Easy Installation

USING LIMITS

Liquid temperature is between -10°C and $+120^{\circ}\text{C}$

Environmental temperature up to $+50^{\circ}\text{C}$

Maximum working pressure 16 bar

Continuous Service S1

COMBINATORIAL METHOD

THE FIRST COMBINATION



IS



CONTROLLER



PRESSURE TANK



CDL

THE SECOND COMBINATION



ISW



CONTROLLER



PRESSURE TANK



CDL

THE THIRD COMBINATION



S



CONTROLLER



PRESSURE TANK



CDL





EDJ End Suction Pump with Control Panne (Low Flow)



PRODUCTS INTRODUCTION

TECHNICAL DESCRIPTION

YE-3 Electric Motor for Pumps

Technical Specifications

Can be offered separately

YE3 high effcient motor with protection IP55 class F

Pump case with Anti-corrosive coating

With quality NSK bearings,wear resistance mechanical seal Easy Installation

USING LIMITS

Liquid temperature is between -10°C and $+120^{\circ}\text{C}$

Environmental temperature up to $+50^{\circ}\text{C}$

Maximum working pressure 16 bar

Continuous Service S1



COMBINATORIAL METHOD

THE FIRST COMBINATION



THE SECOND COMBINATION





GRIMM FIRE PUMP



GRIMM FIRE PUMP

XBD-L/XBD-W Pump for Fire Fighting System



PRODUCTS INTRODUCTION

TECHNICAL DESCRIPTION

New EN733 standard centrifugal pump
Original design by GRIMM FIRE Pump Industry
Both square motor & round motor available
Ye3 high efficient motor, with protection ip55 class F
Pump case with anti-corrosive coating
impeller in stainless steel AISI 304 or cast iron
Shaft in stainless steel AISI 304 or galvanized iron
Galvanized counter flange with bolts, nuts and gaskets
Quality NSK bearing, wear resistance mechanical seals

APPLICATIONS



Suitable for use With clean water and liquids that are not chemically Aggressive towards the materials from which the pump is made,
The EN733 centrifugal pumps are recommended for use in water supply, Cleaning sets, pressure boosting, firefig heing sets, irrigation, industrial, Applications, water circulation in climatisation set, agricultural.

USING LIMITS

Liquid temperature between -10°C and + 120°C
Ambient temperature up to + 50°C
Max. working pressure 16 bar
Continuous service S 1

CERTIFICATE

CE certification and China fire safety certification
Certificate No TH2412071-C02-C01、33122XF1417

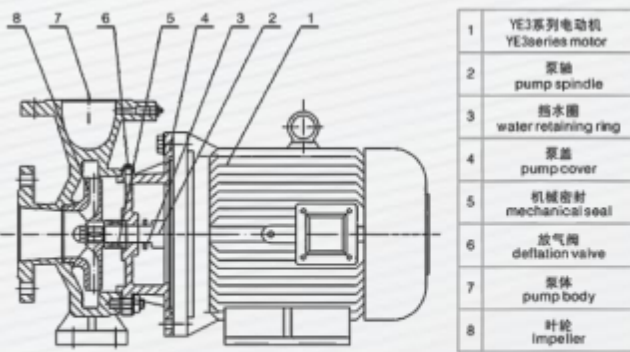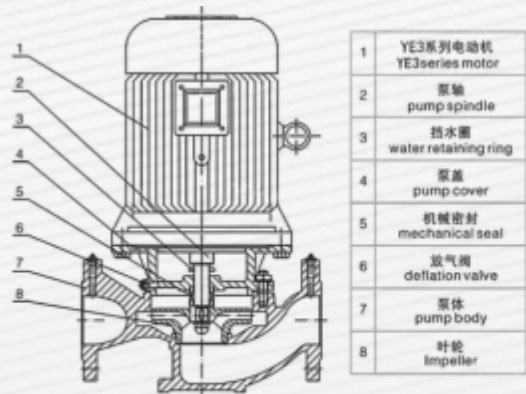


PERFORMANCE PARAMETER

Summary Table of Inspection Results

Performance Curve

Producer : Grimm Water Treatment (Zhejiang) Co.,Ltd. NO : Zb2024-M0636
Product type :XBD8. 7/100G-XBD-L/XBD-W

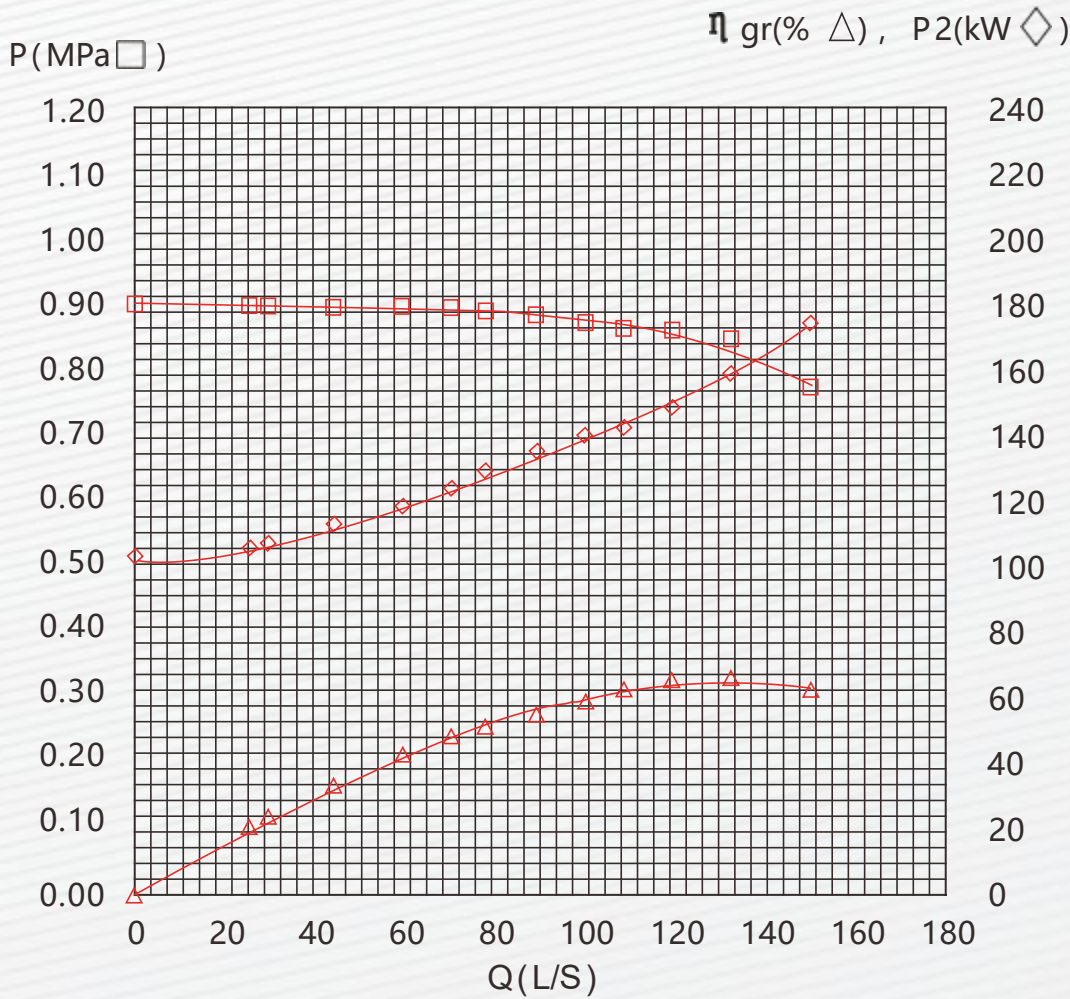

Fire Equipment Quality Supervision and Inspection Center



CDL Pump for Fire Fighting System(Jockey pump)



PRODUCTS INTRODUCTION

TECHNICAL DESCRIPTION

New EN733 standard centrifugal pump
Original design by GRIMM FIRE Pump Industry
Both square motor & round motor available
Ye3 high efficient motor, with protection ip55 class F
Pump case with anti-corrosive coating
impeller in stainless steel AISI 304 or cast iron
Shaft in stainless steel AISI 304 or galvanized iron
Galvanized counter flange with bolts, nuts and gaskets
Quality NSK bearing, wear resistance mechanical seals

APPLICATIONS


Suitable for use With clean water and liquids that are not chemically Aggressive towards the materials from which the pump is made,
The EN733 centrifugal pumps are recommended for use in water supply, Cleaning sets, pressure boosting, firefig he ing sets, irrigation, industrial, Applications, water circulation in climatisation set, agricultural.

USING LIMITS

Liquid temperature between -10°C and + 120°C
Ambient temperature up to + 50°C
Max. working pressure 16 bar
Continuous service S1

CERTIFICATE

CE certification and China fire safety certification
Certificate No TH2412071-C02-C01、33122XF1417

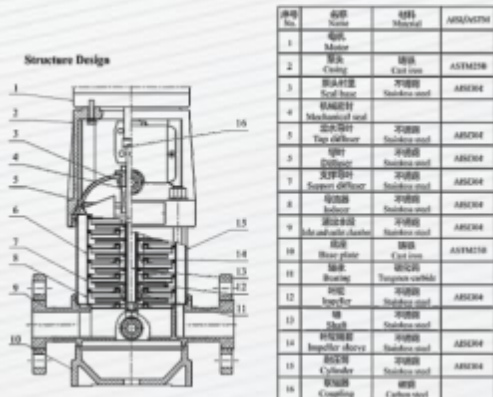

PERFORMANCE PARAMETER


Summary Table of Inspection Results
Performance Curve

Producer :Grimm Water Treatment (Zhejiang)
Co., Ltd.
Product type :XBD24. 0/30G-CDL
XBD15. 3/5W-CDL

N0 : Zb2024-M0643
Zb2024-M0647

η gr(% Δ), P2(kW $\Diamond$)

P(MPa $\square$)

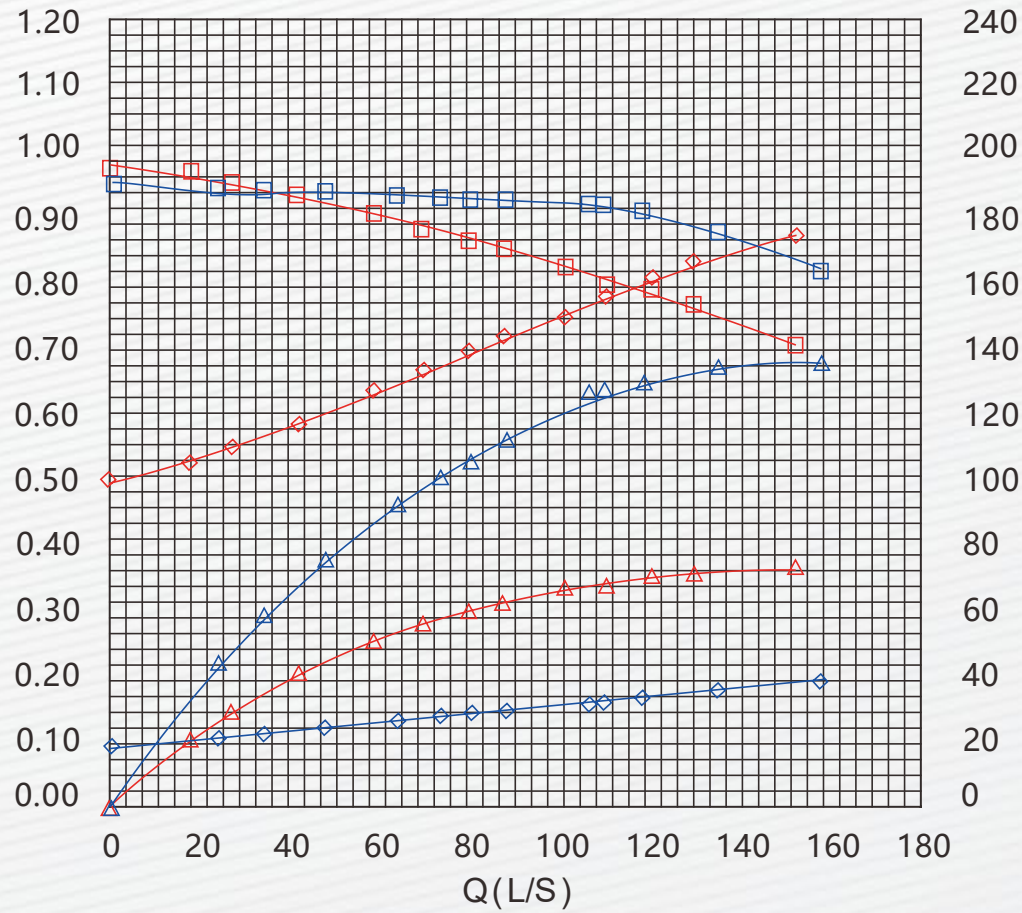

Fire Equipment Quality Supervision and Inspection Center



PRODUCTS INTRODUCTION

TECHNICAL DESCRIPTION

New EN733 standard centrifugal pump

Original design by GRIMM FIRE Pump Industry

Both square motor & round motor available

Ye3 high efficient motor, with protection ip55 class F

Pump case with anti-corrosive coating

impeller in stainless steel AISI 304 or cast iron

Shaft in stainless steel AISI 304 or galvanized iron

Gatvanized counter flange with bolts, nuts and gaskets

Quality NSK bearing, wear resistance mechanical seals

APPLICATIONS


Suitable for use With clean water and liquids that are not chemically Aggressive towards the materials from which the pump is made, The EN733 centrifugal pumps are recommended for use in water supply, Cleaning sets, pressure boosting, fire fighting sets, irrigation, industrial, Applications, water circulation in climatisation set, agricultural.

USING LIMITS

Liquidtemperature between -10°C and + 120°C
Ambient temperature up to + 50°C
Max. working pressure 16 bar
Continuous service S 1

CERTIFICATE

CE certification and China fire safety certification
Certificate No TH2412071-C02-C01、33122XF1417

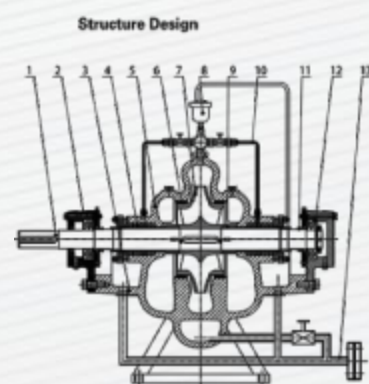

序号 No.	零件名称 Name	材料 Material
1	轴头 Shaft	20Cr1A,GB3160 S32805
2	轴承套 Bearing housing	H7200
3	上盖板 Casing	Q235H, S32205
4	填料密封 Packing seal assembly	Carbon Fiber
5	罩盖 Upper Casing	Q235H, S32205
6	联轴器封环 Coupling Seal Ring	C36000
7	叶轮 Impeller	S30405, S32205
8	自动排气阀 Air Release Valve	
9	刮刀 Scrap Skewer	S65Mn, S5316L
10	冲渣管帽 Flushing Pipe	Q235H, S32205
11	水封圈 Water-Proof Ring	NBR
12	轴承 Bearing	SKF
13	螺母管帽 Nut Flange	Q235H, S32205

PERFORMANCE PARAMETER

Summary Table of Inspection Results

Performance Curve


Producer :Grimm Water Treatment (Zhejiang)
Co., Ltd.

NO: Zb2024-M0648
Zb2024-M0649

Product type :XBD16. 0/350G-XBD-S
XBD5. 0/520G-XBC-S

 $\eta_{gr}(\% \triangle), P2(kW \diamond)$

P (MPa)

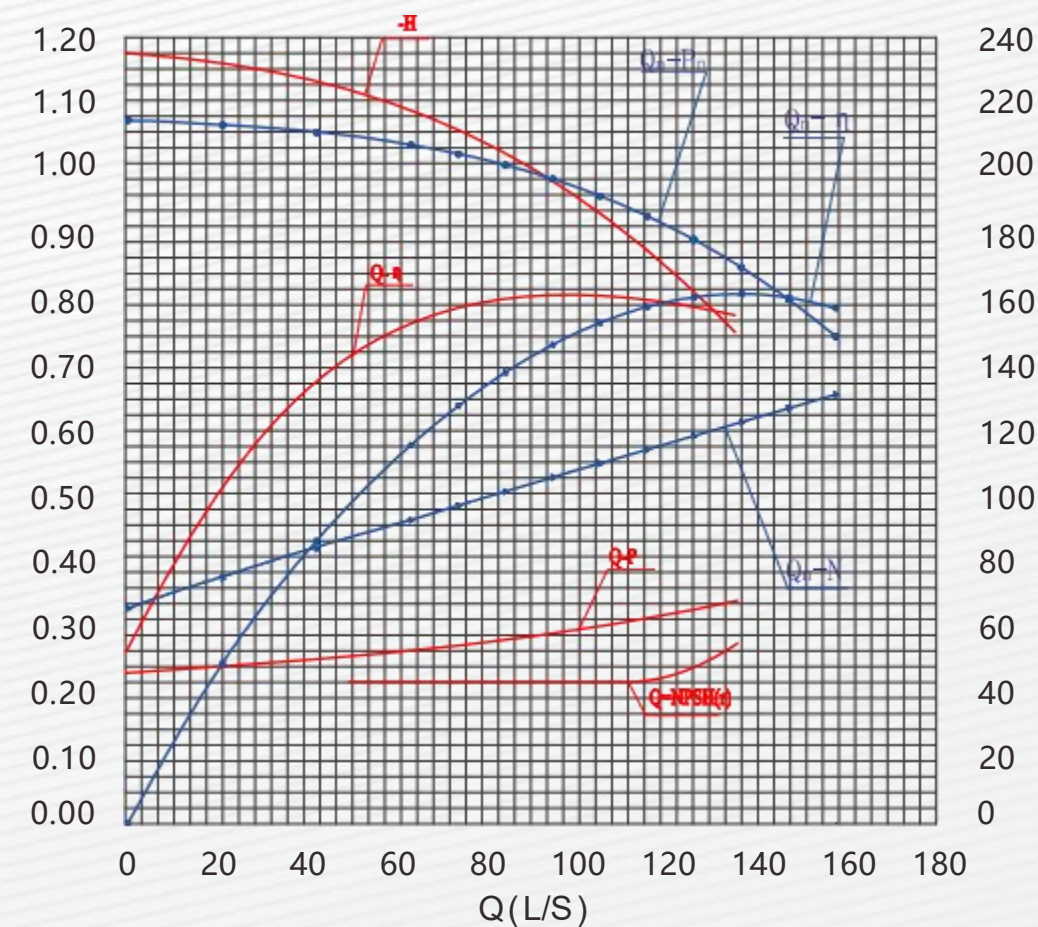

Fire Equipment Quality Supervision and Inspection Center



GRIMM FIRE PUMP



XBC-1S/XBD-1S Pump for Fire Fighting System



PRODUCTS INTRODUCTION

TECHNICAL DESCRIPTION

- New EN733 standard centrifugal pump
- Original design by GRIMM FIRE Pump Industry
- Both square motor & round motor available
- Ye3 high efficient motor, with protection ip55 class F
- Pump case with anti-corrosive coating
- impeller in stainless steel AISI 304 or cast iron
- Shaft in stainless steel AISI 304 or galvanized iron
- Galvanized counter flange with bolts, nuts and gaskets
- Quality NSK bearing, wear resistance mechanical seals

APPLICATIONS


Suitable for use With clean water and liquids that are not chemically Aggressive towards the materials from which the pump is made, The EN733 centrifugal pumps are recommended for use in water supply, Cleaning sets, pressure boosting, firefighting sets, irrigation, industrial, Applications, water circulation in climatization set, agricultural.

USING LIMITS

Liquid temperature between -10°C and +120°C
Ambient temperature up to +50°C
Max. working pressure 16 bar
Continuous service S1

CERTIFICATE

CE certification and China fire safety certification
Certificate No TH2412071-C02-C01、33122XF1417

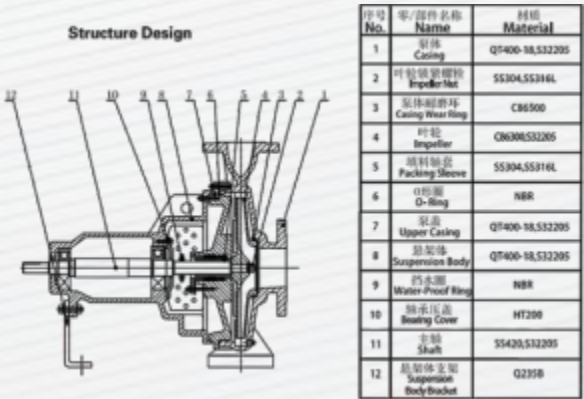

PERFORMANCE PARAMETER

Summary Table of Inspection Results

Performance Curve


Producer :Grimm Water Treatment (Zhejiang)
Co., Ltd.

N0 : Zb2024-M0644
Zb2024-M0650

Product type :XBD11.0/150G-XBD-1S
XBD8.5/100G-XBC-1S

η gr(% Δ), P2(kW $\Diamond$)

P(MPa $\square$)

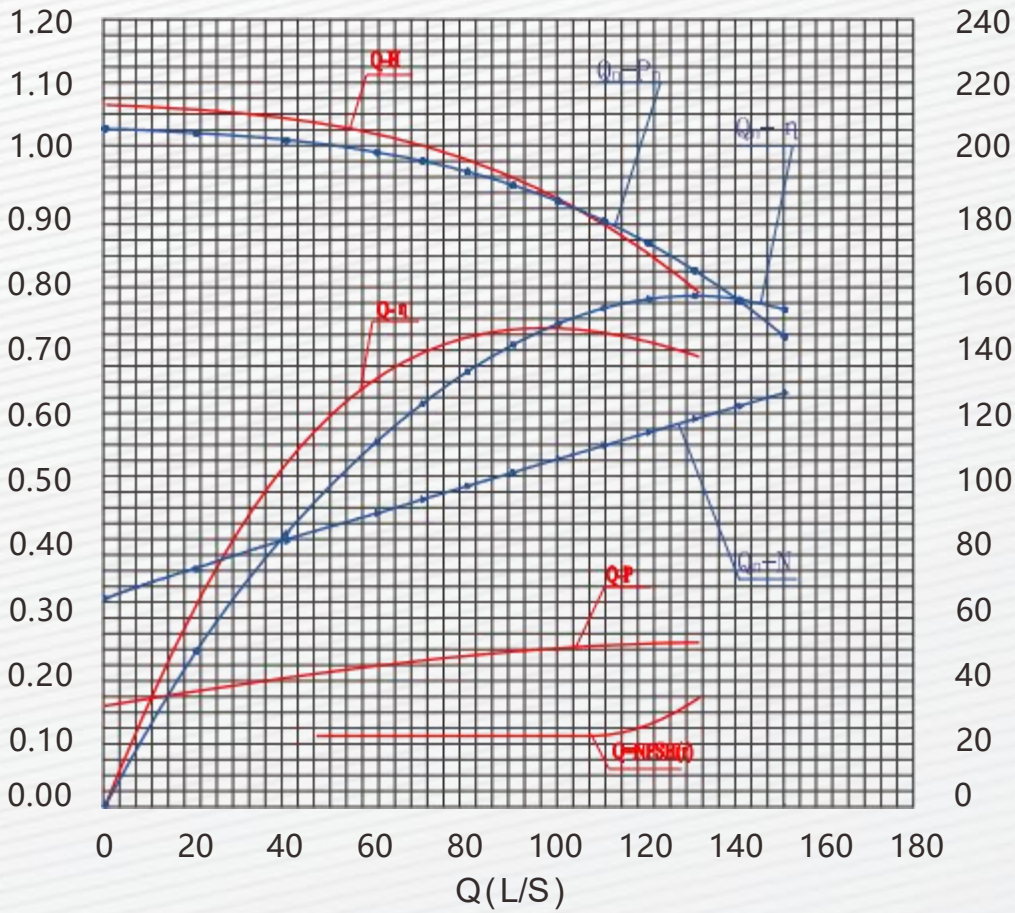

Fire Equipment Quality Supervision and Inspection Center



XBC-SJ/XBD-SJ Pump for Fire Fighting System



PRODUCTS INTRODUCTION

TECHNICAL DESCRIPTION

New EN733 standard centrifugal pump
Original design by GRIMM FIRE Pump Industry
Both square motor & round motor available
Ye3 high efficient motor, with protection ip55 class F
Pump case with anti-corrosive coating
impeller in stainless steel AISI 304 or cast iron
Shaft in stainless steel AISI 304 or galvanized iron
Galvanized counter flange with bolts, nuts and gaskets
Quality NSK bearing, wear resistance mechanical seals

APPLICATIONS

Suitable for use With clean water and liquids that are not chemically Aggressive towards the materials from which the pump is made,
The EN733 centrifugal pumps are recommended for use in water supply, Cleaning sets, pressure boosting, firefighting sets, irrigation, industrial, Applications, water circulation in climatization set, agricultural.

USING LIMITS

Liquid temperature between -10°C and +120°C
Ambient temperature up to +50°C
Max. working pressure 16 bar
Continuous service S1

CERTIFICATE

CE certification and China fire safety certification
Certificate No TH2412071-C02-C01、33122XF1417

Construction Drawing



PERFORMANCE PARAMETER

Summary Table of Inspection Results
Performance Curve


Producer :Grimm Water Treatment (Zhejiang)
Co., Ltd.

N0 : Zb2024-M0651
Zb2024-M0652

Product type :XBD12.0/160G-XBD-SJ
XBD12.0/160G-XBC-SJ

η gr(% $\triangle$), P2(kW $\diamond$)

P(MPa $\square$)

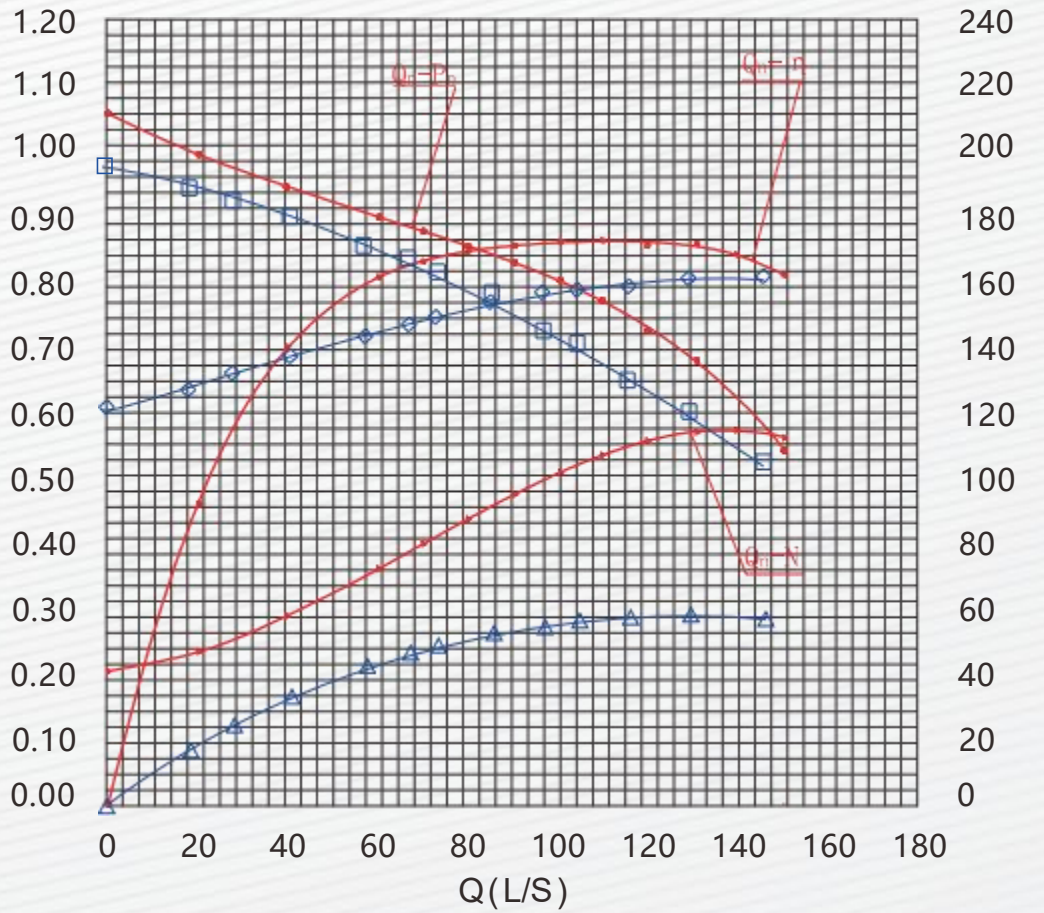

Fire Equipment Quality Supervision and Inspection Center