


TrackScooter — Plate Cutting Sheet


Rev 010 (cut rim, design of record) with Rev 009 (no-cut) differences noted · 2026-07-26 · quantities for the WHOLE VEHICLE (2 pods) · all dimensions mm · source of truth: apollo_track_pod.scad

Cut list

Plate	Qty	Stock	Cut — Rev 010	Rev 009 difference	Holes / features (on centreline unless noted)
Carrier strips	4	50 × 6	224	identical	hub-axle slot Ø10 with flats (datum 0) · M8 fork-leg hole at +52 · pivot bore Ø30.8 at –132 (ream in pairs) · keel M8 hole at –99.5 (Rev 009 uses no keel — drill anyway to keep the upgrade path)
Arm bars, trailing	4	40 × 6.35	≈185	≈177	pivot bore Ø30.8 · shock bolt Ø8 at 50.5 from pivot (Rev 009: 47.0 — drill BOTH) · 25 mm tensioner slot at the tip (Ø15 wide)
Arm bars, leading	4	40 × 6.35	≈166	≈158	pivot bore Ø30.8 · shock bolt Ø8 (both stations) · plain Ø15 axle hole at the tip
Cross-brace webs ("arms join")	4	40×6 offcut	≈51 × 30	weld at 22–52 from pivot (vs 28–58)	no holes — welded between each arm's two plates
Tensioner lugs ("lug plate")	4	40×6 offcut	≈35 × 20	identical	M6 clearance hole; welded on the trailing plates' OUTER faces, 34 behind the axle centre
Shock tab stubs	8	40 × 6	55	identical	Ø8 hole for the upper shock pin; lap-welded on carrier OUTER faces at hub level (upper eye lands at ±50, –8.5 from hub centre)

Shop rules: cut bars 1 mm long and file square · drill from the 1:1 printed template (plates_rev010.dxf / plates_rev009.dxf), centre-punch first · pivot bores Ø30 hole-saw then hand-ream to 30.8, always in pairs · arm bars are the ONLY version-dependent plates — cut them last, after the rim-cut decision · carrier keel hole + both shock-bolt stations pre-drilled = one steel set serves both revisions.

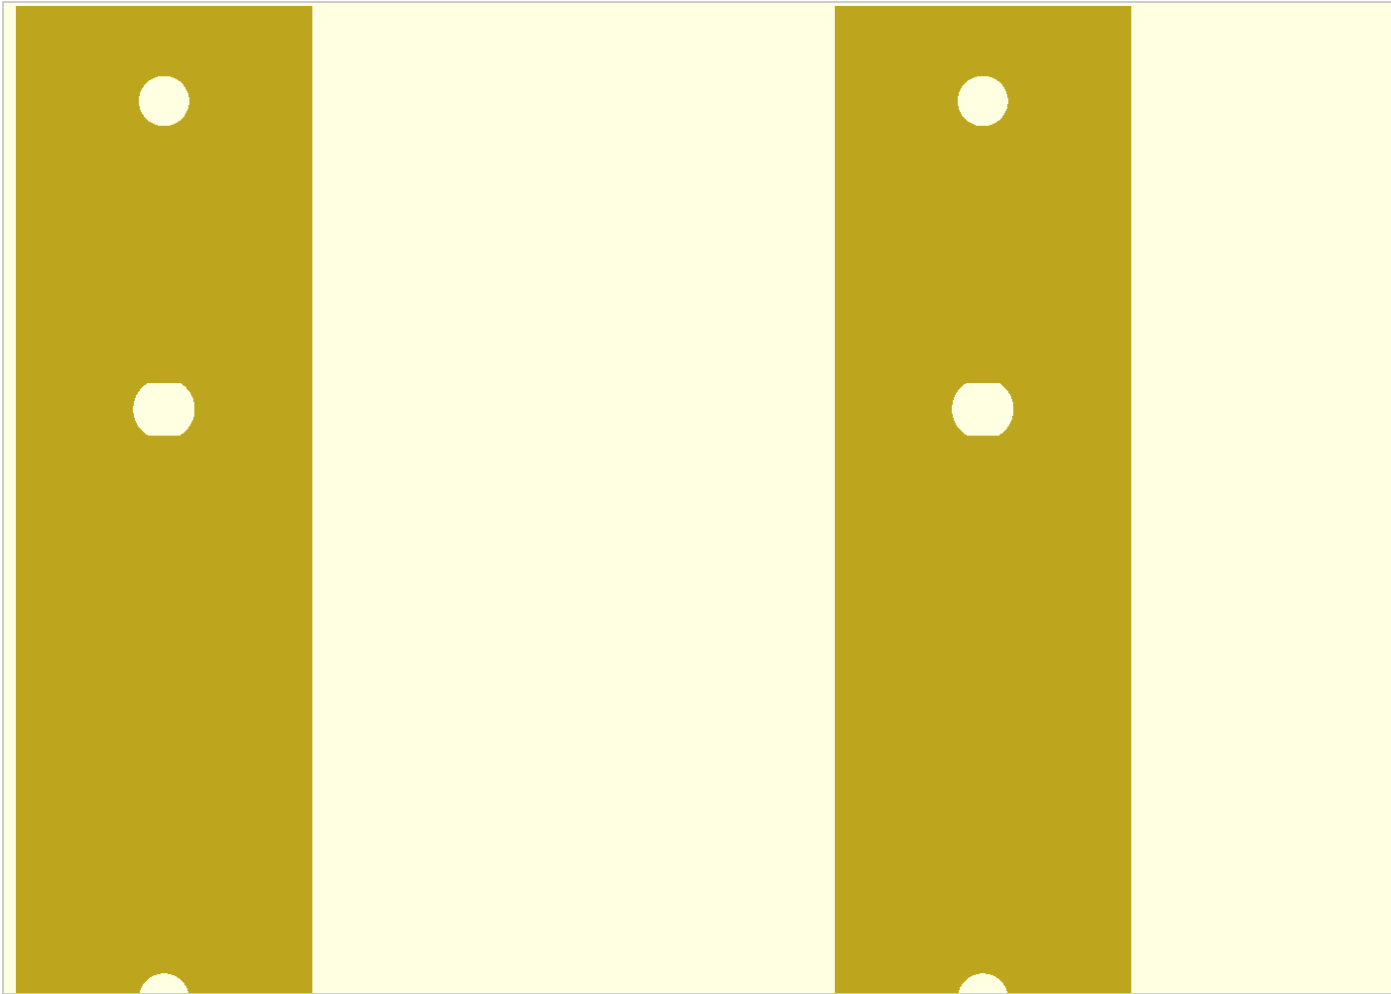

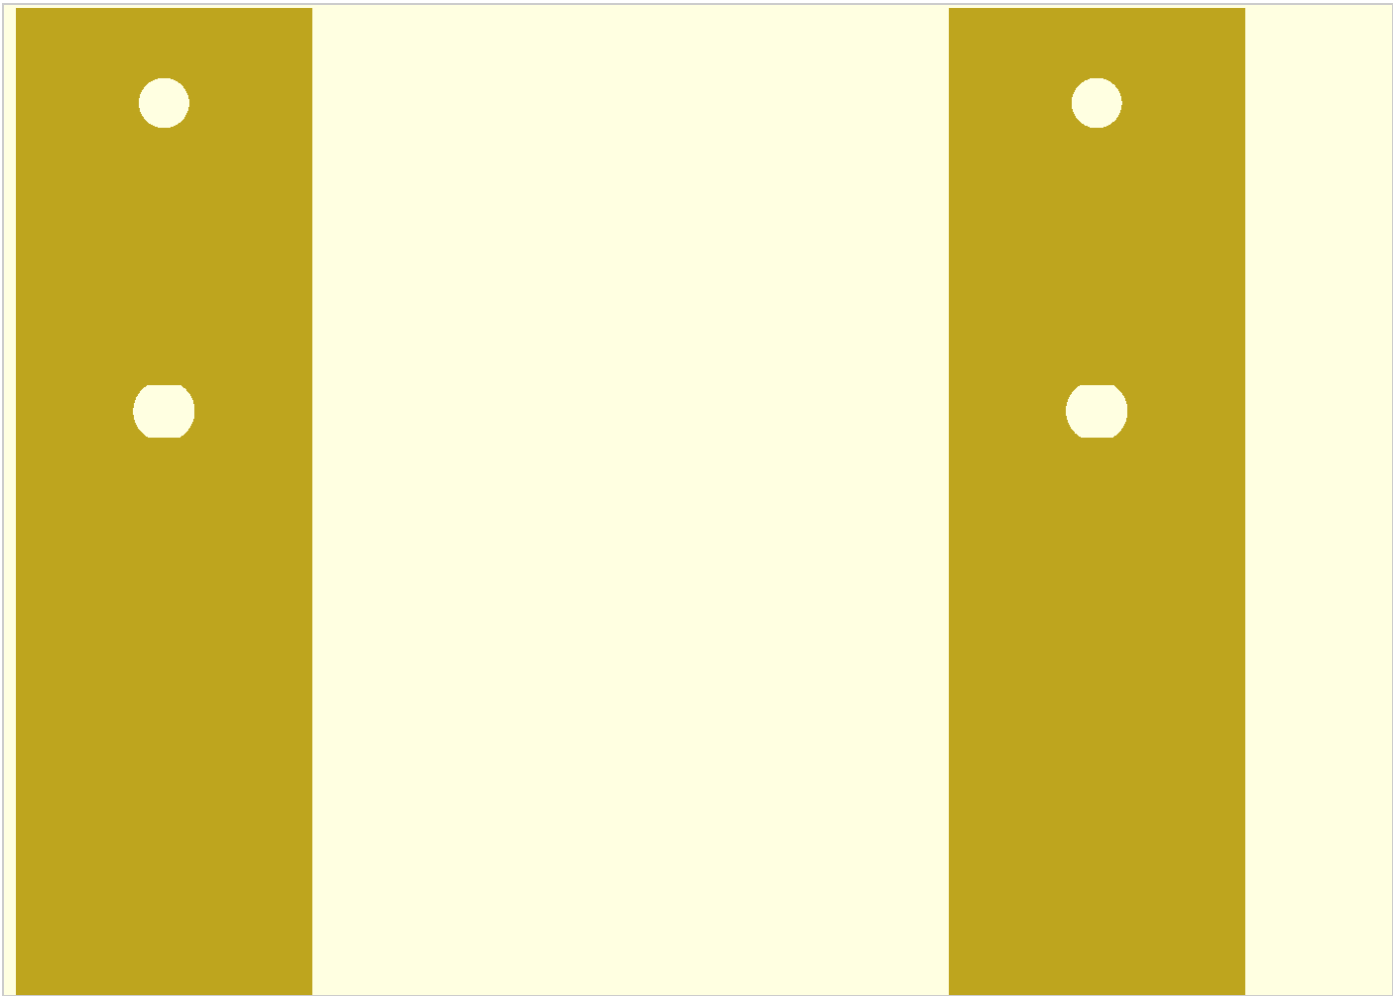

Brace webs and tensioner lugs are offcut pieces and are not in the DXF layout — dimensions above.