



60 × 6 flat bar · plate 260 long · REAR shock eye · right side (+z) · no cut, holes only

PRINT AT 100% / “ACTUAL SIZE” — NOT “Fit to page”, NOT “Shrink oversized pages”.
A4 or US Letter both work — this page is smaller than either. Check the ruler below BEFORE you cut or drill.

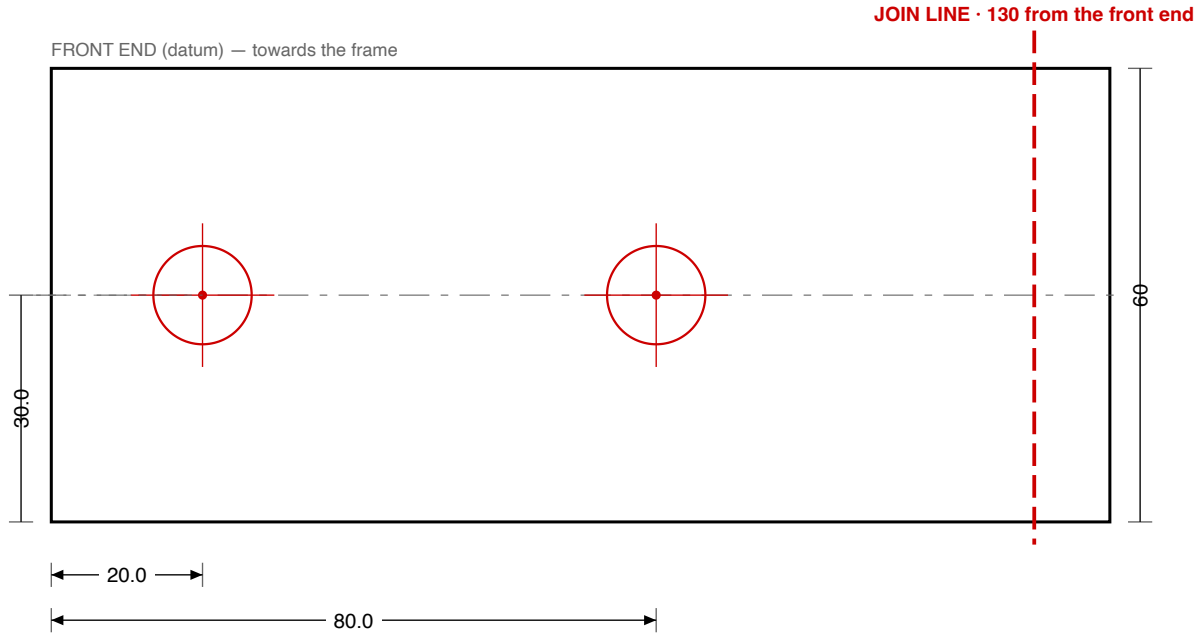

Cut BOTH halves out on the outline. Lay them on the bar, long edges on the bar edges, join lines on top of each other (20 mm overlap). Tape. Punch every red cross. This half = the FRONT end: the 2 × Ø13 holes for the M12 bolts into the rail.

SCALE CHECK — this scale must measure exactly 150 mm



and this one 50 mm



If it does not measure right, do not cut — reprint.
Reprint percentage = 15000 ÷ (the mm you actually measured).
Reads LONG = the dialog is enlarging; reads SHORT = shrinking. Either way: Actual size.

if the 150 mm scale reads...	reprint at
141 mm	106%
144 mm	104%
147 mm	102%
150 mm	correct — go ahead
153 mm	98%
156 mm	96%

Paper also grows/shrinks with humidity — ±0.3 mm over 150 is normal.


ALL HOLES OF THIS PLATE (mm from the front end · up from the bottom edge)

Ø13 — M12 into the rail	20.0 from front · 30.0 up
Ø13 — M12 into the rail	80.0 from front · 30.0 up
Ø10.4 key, flats 8.9 — hub axle	188.0 from front · 19.0 up
Ø8.4 — M8 to the hub plate	188.0 from front · 43.0 up
Ø8.4 — shock top eye	240.1 from front · 21.4 up

The paper is a guide; these numbers are the datum — check them with a steel rule before you drill.


60 × 6 flat bar · plate 260 long · REAR shock eye · right side (+z) · no cut, holes only

PRINT AT 100% / “ACTUAL SIZE” — NOT “Fit to page”, NOT “Shrink oversized pages”.
A4 or US Letter both work — this page is smaller than either. Check the ruler below BEFORE you cut or drill.

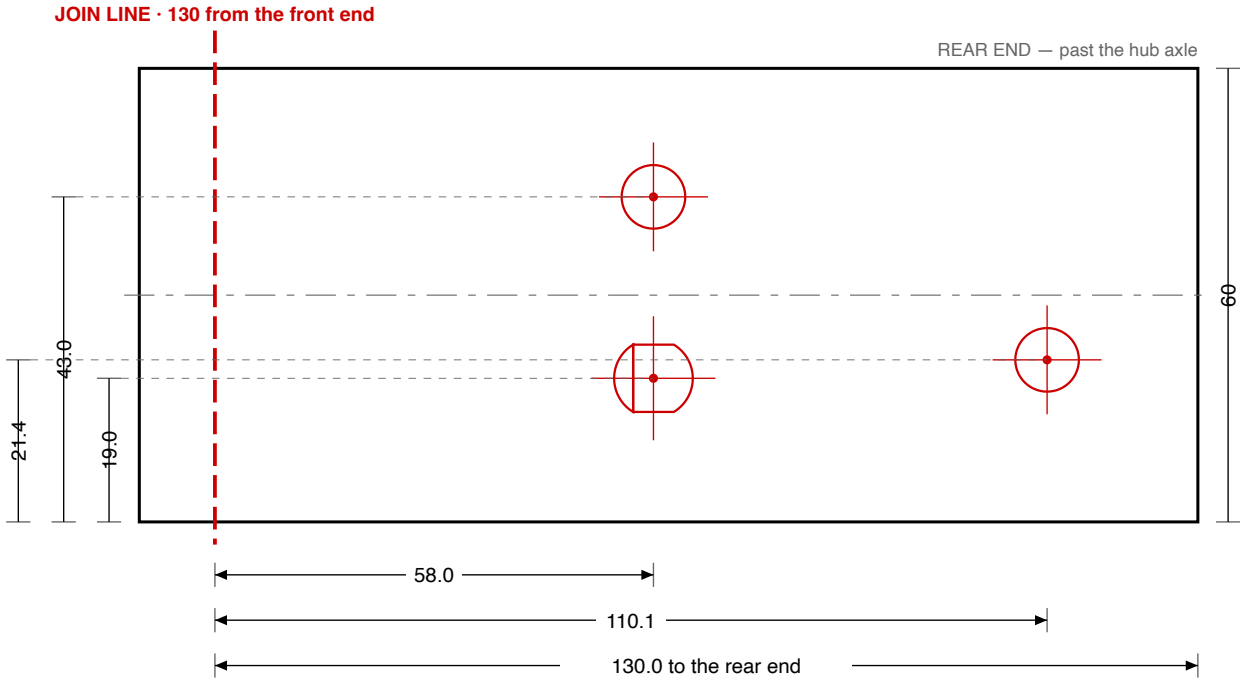

This half = the REAR end: hub-axle key, M8 hole and the shock top eye.
Key: drill Ø10.4, then file two flats 8.9 apart (top and bottom). No slot.
Match the rear-pod HUB PLATE: drill Ø8.4 at 44 mm from its top end (between the fork hole and the key). Bolt + key the plate, then weld it to the hub plate all round.

SCALE CHECK — this scale must measure exactly 150 mm



and this one 50 mm



If it does not measure right, do not cut — reprint.
Reprint percentage = $15000 \div (\text{the mm you actually measured})$.
Reads LONG = the dialog is enlarging; reads SHORT = shrinking. Either way: Actual size.

if the 150 mm scale reads...	reprint at
141 mm	106%
144 mm	104%
147 mm	102%
150 mm	correct — go ahead
153 mm	98%
156 mm	96%

Paper also grows/shrinks with humidity — ±0.3 mm over 150 is normal.


ALL HOLES OF THIS PLATE (mm from the front end · up from the bottom edge)

Ø13 — M12 into the rail	20.0 from front · 30.0 up
Ø13 — M12 into the rail	80.0 from front · 30.0 up
Ø10.4 key, flats 8.9 — hub axle	188.0 from front · 19.0 up
Ø8.4 — M8 to the hub plate	188.0 from front · 43.0 up
Ø8.4 — shock top eye	240.1 from front · 21.4 up

The paper is a guide; these numbers are the datum — check them with a steel rule before you drill.


60 × 6 flat bar · plate 208 long · FRONT shock eye · left side (–z) · no cut, holes only

PRINT AT 100% / “ACTUAL SIZE” — NOT “Fit to page”, NOT “Shrink oversized pages”.
A4 or US Letter both work — this page is smaller than either. Check the ruler below BEFORE you cut or drill.

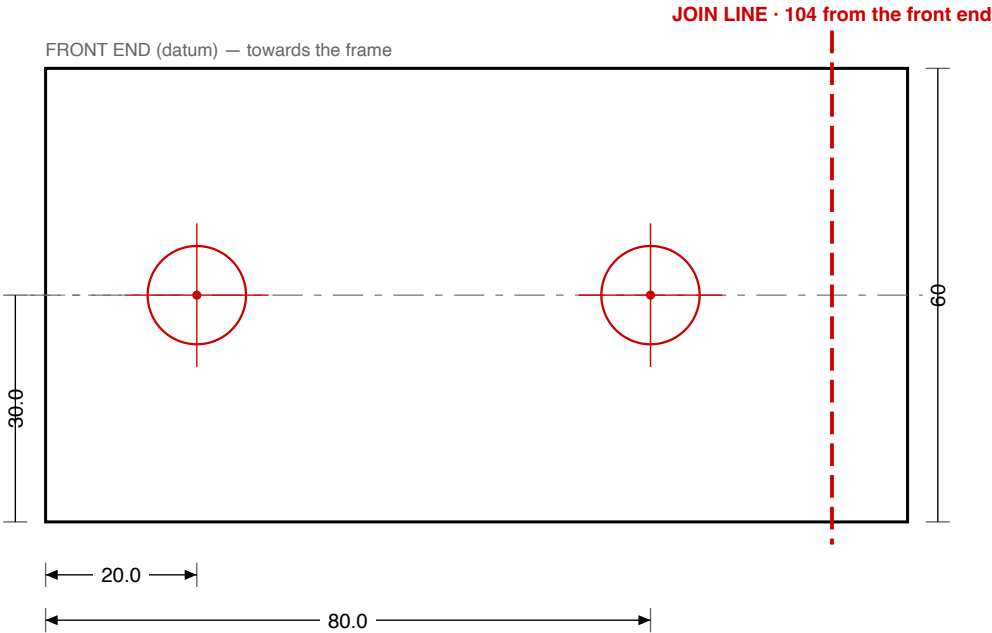

Cut BOTH halves out on the outline. Lay them on the bar, long edges on the bar edges, join lines on top of each other (20 mm overlap). Tape. Punch every red cross. This half = the FRONT end: the 2 × Ø13 holes for the M12 bolts into the rail.

SCALE CHECK — this scale must measure exactly 150 mm



and this one 50 mm



If it does not measure right, do not cut — reprint.
Reprint percentage = 15000 ÷ (the mm you actually measured).
Reads LONG = the dialog is enlarging; reads SHORT = shrinking. Either way: Actual size.

if the 150 mm scale reads...	reprint at
141 mm	106%
144 mm	104%
147 mm	102%
150 mm	correct — go ahead
153 mm	98%
156 mm	96%

Paper also grows/shrinks with humidity — ±0.3 mm over 150 is normal.


ALL HOLES OF THIS PLATE (mm from the front end · up from the bottom edge)

Ø13 — M12 into the rail	20.0 from front · 30.0 up
Ø13 — M12 into the rail	80.0 from front · 30.0 up
Ø8.4 — shock top eye	135.9 from front · 21.4 up
Ø10.4 key, flats 8.9 — hub axle	188.0 from front · 19.0 up
Ø8.4 — M8 to the hub plate	188.0 from front · 43.0 up

The paper is a guide; these numbers are the datum — check them with a steel rule before you drill.


60 × 6 flat bar · plate 208 long · FRONT shock eye · left side (–z) · no cut, holes only

PRINT AT 100% / “ACTUAL SIZE” — NOT “Fit to page”, NOT “Shrink oversized pages”.
A4 or US Letter both work — this page is smaller than either. Check the ruler below BEFORE you cut or drill.

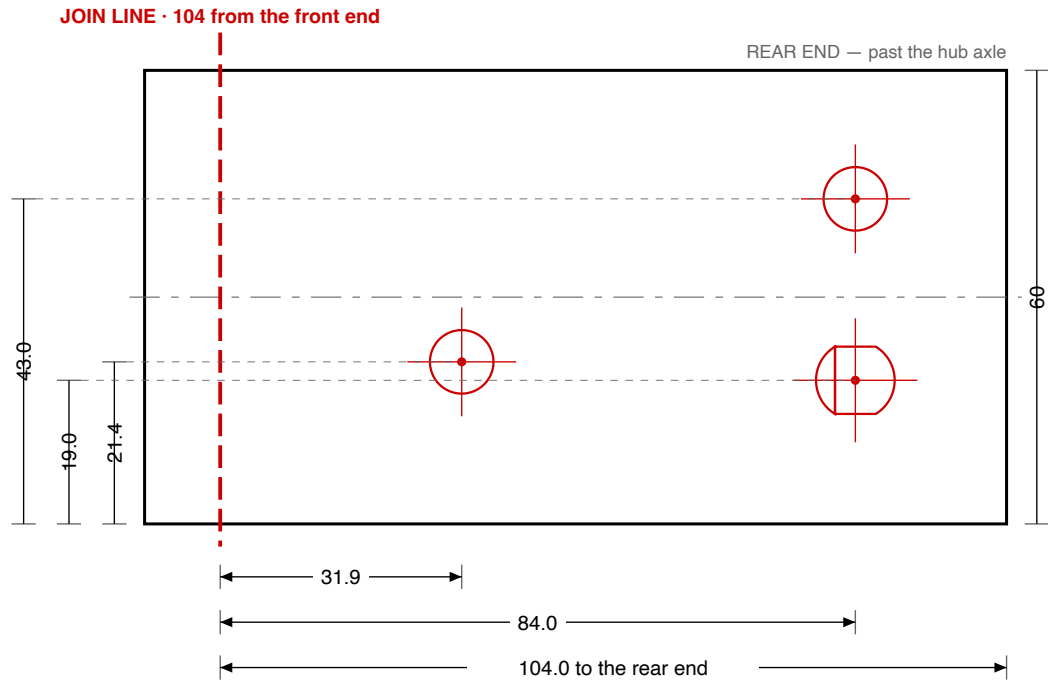

This half = the REAR end: hub-axle key, M8 hole and the shock top eye.
Key: drill Ø10.4, then file two flats 8.9 apart (top and bottom). No slot.
Match the rear-pod HUB PLATE: drill Ø8.4 at 44 mm from its top end (between the fork hole and the key). Bolt + key the plate, then weld it to the hub plate all round.

SCALE CHECK — this scale must measure exactly 150 mm



and this one 50 mm



If it does not measure right, do not cut — reprint.
Reprint percentage = $15000 \div (\text{the mm you actually measured})$.
Reads LONG = the dialog is enlarging; reads SHORT = shrinking. Either way: Actual size.

if the 150 mm scale reads...	reprint at
141 mm	106%
144 mm	104%
147 mm	102%
150 mm	correct — go ahead
153 mm	98%
156 mm	96%

Paper also grows/shrinks with humidity — ±0.3 mm over 150 is normal.


ALL HOLES OF THIS PLATE (mm from the front end · up from the bottom edge)

Ø13 — M12 into the rail	20.0 from front · 30.0 up
Ø13 — M12 into the rail	80.0 from front · 30.0 up
Ø8.4 — shock top eye	135.9 from front · 21.4 up
Ø10.4 key, flats 8.9 — hub axle	188.0 from front · 19.0 up
Ø8.4 — M8 to the hub plate	188.0 from front · 43.0 up

The paper is a guide; these numbers are the datum — check them with a steel rule before you drill.


100 × 40 × 2 tube · use on BOTH walls of BOTH rails (4 times)

PRINT AT 100% / “ACTUAL SIZE” — NOT “Fit to page”, NOT “Shrink oversized pages”.
A4 or US Letter both work — this page is smaller than either. Check the ruler below BEFORE you cut or drill.

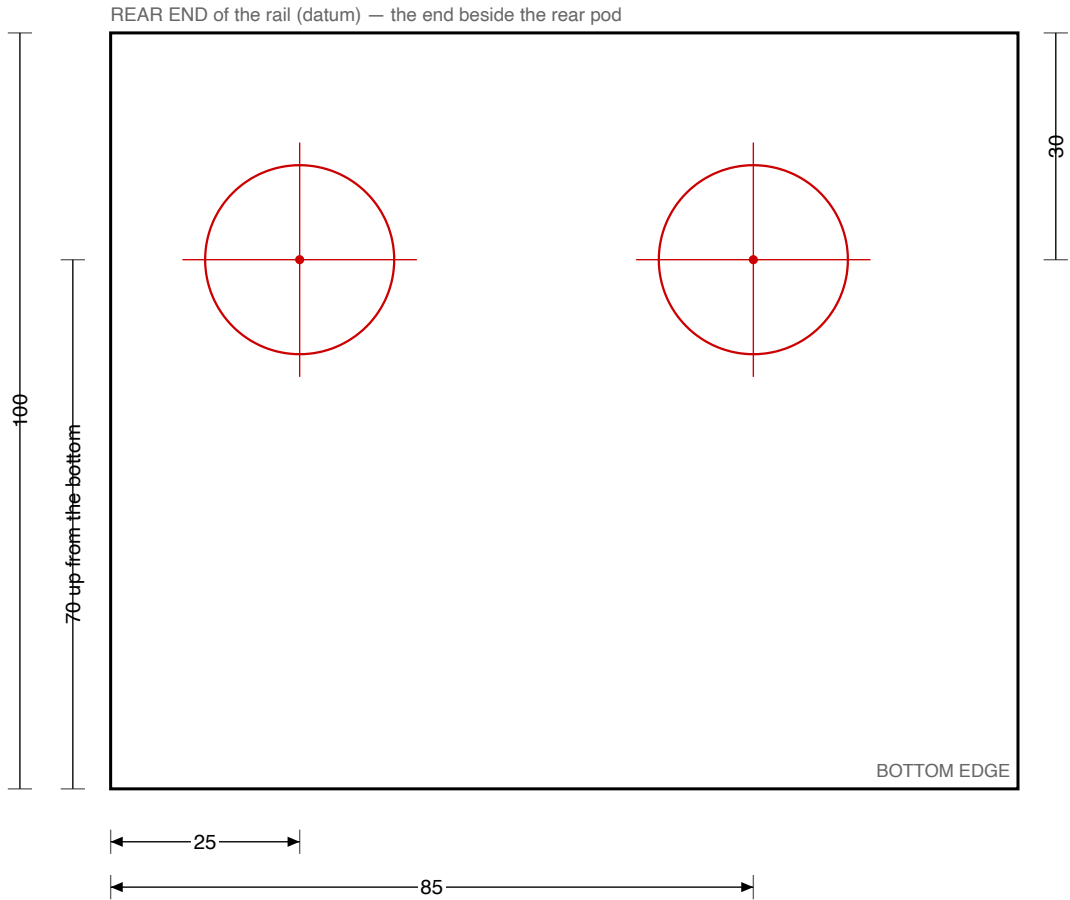

Line up the REAR END and the BOTTOM EDGE every time — the holes are not in the middle.
Best: drill a Ø6 pilot straight through both walls on a drill press, then open each side to Ø25 with a hole saw. Weld a Ø25 × Ø13 × 40 steel sleeve into each pair of holes, flush with both walls. The M12 goes in from OUTSIDE, through the sleeve and the green plate, into the M12 nut welded on the green plate.

SCALE CHECK — this scale must measure exactly 150 mm



and this one 50 mm



If it does not measure right, do not cut — reprint.
Reprint percentage = 15000 ÷ (the mm you actually measured).
Reads LONG = the dialog is enlarging; reads SHORT = shrinking. Either way: Actual size.

if the 150 mm scale reads...	reprint at
141 mm	106%
144 mm	104%
147 mm	102%
150 mm	correct — go ahead
153 mm	98%
156 mm	96%

Paper also grows/shrinks with humidity — ±0.3 mm over 150 is normal.