
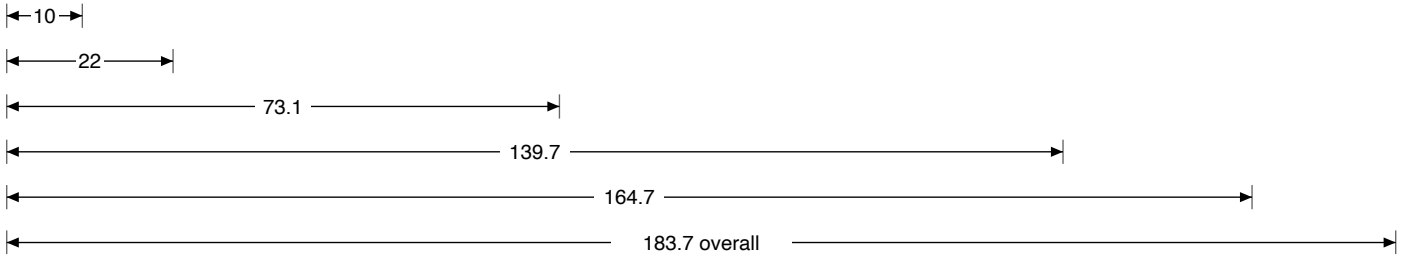


40 x 6.35 (¼") flat bar


PRINT AT 100% / “ACTUAL SIZE” — NOT “Fit to page”, NOT “Shrink oversized pages”.
A4 or US Letter both work — this page is smaller than either. Check the ruler below BEFORE you cut or drill.

DATUM — chamfered (rear/pivot) end

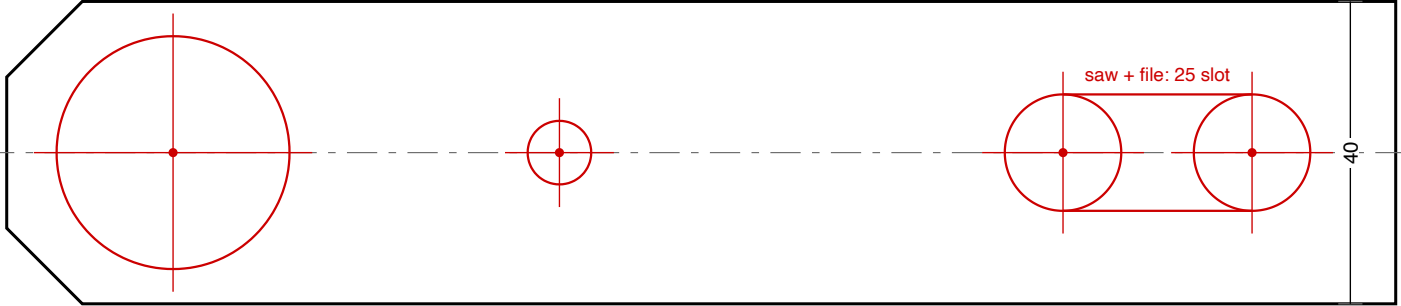

Chamfer 10x10 on both rear corners · every hole is on the centreline, 20.0 from either edge.
Wheel end is a 25 mm SLOT for the belt tensioner: drill Ø15.4 at 139.7 and at 164.7, saw out the web between them, then file the sides parallel.
Cut 1 mm long at the wheel end — arm length C = 117.4 is sacred and gets filed to final position with the belt fitted (blueprint §9.2), never guessed.

SCALE CHECK — this scale must measure exactly 150 mm



and this one 50 mm



If it does not measure right, do not cut — reprint.	
Reprint percentage = 15000 ÷ (the mm you actually measured).	
Reads LONG = the dialog is enlarging; reads SHORT = shrinking. Either way: Actual size.	
if the 150 mm scale reads...	reprint at
141 mm	106%
144 mm	104%
147 mm	102%
150 mm	correct — go ahead
153 mm	98%
156 mm	96%

Paper also grows/shrinks with humidity — ±0.3 mm over 150 is normal.

HOLE LAYOUT (mm from the chamfered end, on the centreline)


Overall length	183.7
Bar width (stock)	40.0
Centreline, from either edge	20.0
Chamfer, both rear corners	10 x 10
Ø30.8 pivot bushing, from datum	22.0
Ø8.4 brace, from datum	73.1
Ø15.4 slot, centres from datum	139.7 → 164.7

The paper is a convenience, not the datum — these numbers are. If in doubt, mark them with a rule and a square straight onto the bar and centre-punch.

40 x 6.35 (1/4") flat bar


PRINT AT 100% / “ACTUAL SIZE” — NOT “Fit to page”, NOT “Shrink oversized pages”.
A4 or US Letter both work — this page is smaller than either. Check the ruler below BEFORE you cut or drill.

DATUM — chamfered (rear/pivot) end

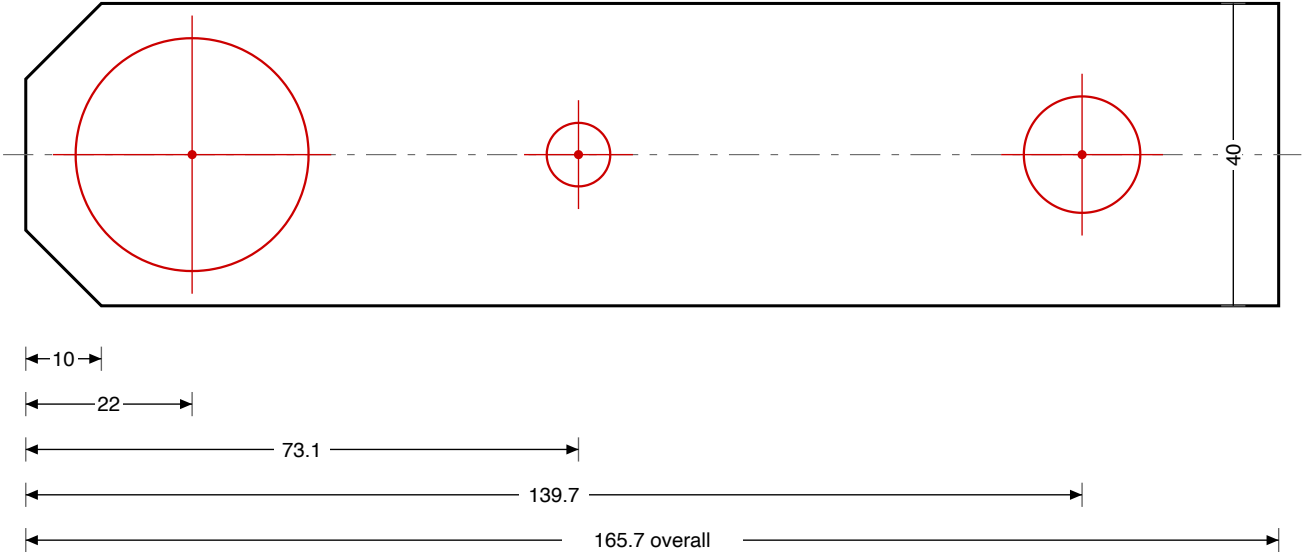

Chamfer 10x10 on both rear corners · every hole is on the centreline, 20.0 from either edge.
Plain round axle bore Ø15.4 at the wheel end — no slot (that is the trailing bar only).
The two plates of a fork are identical: clamp them together and drill them as a pair.
Cut 1 mm long at the wheel end — arm length C = 117.4 is sacred and gets filed to final position with the belt fitted (blueprint §9.2), never guessed.

SCALE CHECK — this scale must measure exactly 150 mm



and this one 50 mm



If it does not measure right, do not cut — reprint.
Reprint percentage = 15000 ÷ (the mm you actually measured).
Reads LONG = the dialog is enlarging; reads SHORT = shrinking. Either way: Actual size.

if the 150 mm scale reads...	reprint at
141 mm	106%
144 mm	104%
147 mm	102%
150 mm	correct — go ahead
153 mm	98%
156 mm	96%

Paper also grows/shrinks with humidity — ±0.3 mm over 150 is normal.

HOLE LAYOUT (mm from the chamfered end, on the centreline)


Overall length	165.7
Bar width (stock)	40.0
Centreline, from either edge	20.0
Chamfer, both rear corners	10 x 10
Ø30.8 pivot bushing, from datum	22.0
Ø8.4 brace, from datum	73.1
Ø15.4 idler axle, from datum	139.7

The paper is a convenience, not the datum — these numbers are. If in doubt, mark them with a rule and a square straight onto the bar and centre-punch.

40 x 6 bar · no keel hole

PRINT AT 100% / “ACTUAL SIZE” — NOT “Fit to page”, NOT “Shrink oversized pages”.

A4 or US Letter both work — this page is smaller than either. Check the ruler below BEFORE you cut or drill.

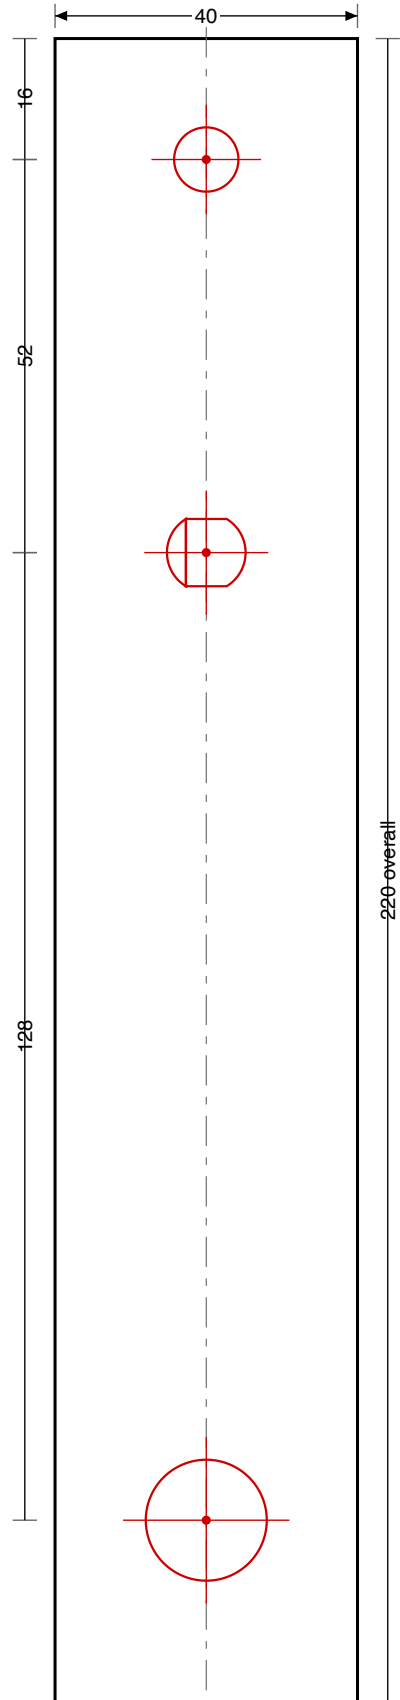

Ø8.5 — M8 into the fork leg


Ø10.4 with two flats 8.9 apart:

the hub-axle torque-arm key. Drill Ø10.4, then file the two flats to 8.9 across. No slot — a slot here lets the axle rotate.


Ø16 pivot bore: drill 15.5 and

ream/file to a snug 16 — always as a clamped pair, so both carriers of a pod match.

SCALE CHECK — this scale must measure exactly 100 mm



and this one 50 mm



If it does not measure right, do not cut — reprint.

Reprint percentage = $10000 \div (\text{the mm you actually measured})$.

Reads LONG = the dialog is enlarging; reads SHORT = shrinking. Either way: Actual size.

if the 100 mm scale reads... reprint at

94 mm	106%
96 mm	104%
98 mm	102%
100 mm	correct — go ahead
102 mm	98%
104 mm	96%

Paper also grows/shrinks with humidity — ± 0.2 mm over 100 is normal.

CARRIER LAYOUT (mm)

Overall length	220
Strip width (stock)	40
Ø8.5 fork bolt, from the near end	16
Ø10.4 axle key — above the fork bolt	52
Ø16 pivot — below the axle key	128
All features on the centreline	20


The paper is a convenience, not the datum — these numbers are. If in doubt, mark them with a rule and a square straight onto the bar and centre-punch.

40 x 6 flat bar · offcuts

PRINT AT 100% / “ACTUAL SIZE” — NOT “Fit to page”, NOT “Shrink oversized pages”.
A4 or US Letter both work — this page is smaller than either. Check the ruler below BEFORE you cut or drill.

SHOCK TAB STUB x4

40x6 · spans the FULL carrier width; hub axle keys through both — Rev 011c. ONE per carrier. 40x6 offcut · identical to the leading fork is the wider one

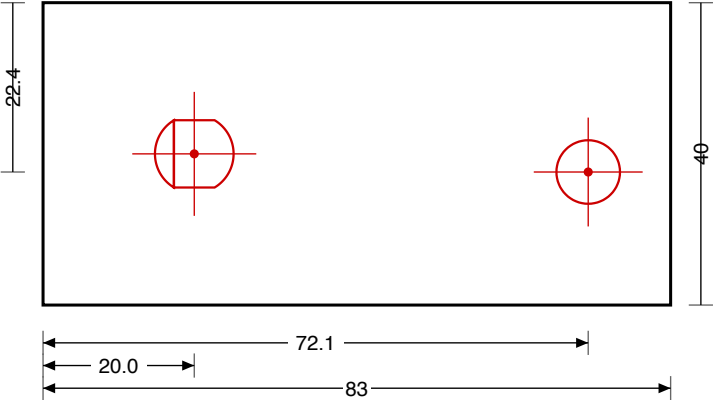


BRACE WEB — LEADING x2

40x6 offcut · identical to the leading fork is the wider one




BRACE WEB — TRAILING x2

40x6 offcut · no holes · nests inside the leading brace

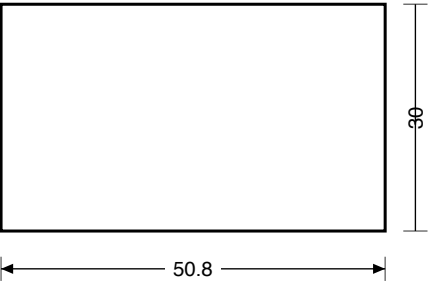


TENSIONER PUSHER BLOCK x2

40x6 · 26 long, rip to 14 · drill 6.6 + weld M6 nut on the FORWARD face (or drill 5.0 and use a pin)



SCALE CHECK — this scale must measure exactly 150 mm



and this one 40 mm



If it does not measure right, do not cut — reprint.

Reprint percentage = 15000 ÷ (the mm you actually measured).

Reads LONG = the dialog is enlarging; reads SHORT = shrinking. Either way: Actual size.

if the 150 mm scale reads...	reprint at
141 mm	106%
144 mm	104%
147 mm	102%
150 mm	correct — go ahead
153 mm	98%
156 mm	96%

Paper also grows/shrinks with humidity — ±0.3 mm over 150 is normal.