
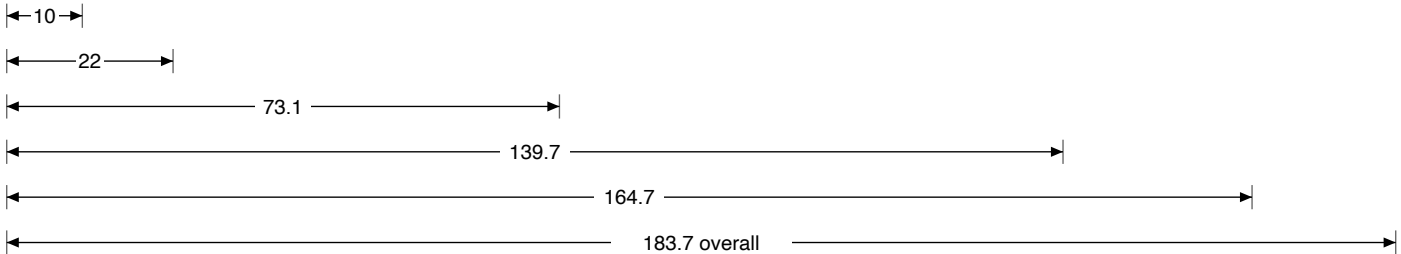


40 x 6.35 (¼") flat bar


**PRINT AT 100% / “ACTUAL SIZE” — NOT “Fit to page”, NOT “Shrink oversized pages”.**  
A4 or US Letter both work — this page is smaller than either. Check the ruler below BEFORE you cut or drill.

DATUM — chamfered (rear/pivot) end

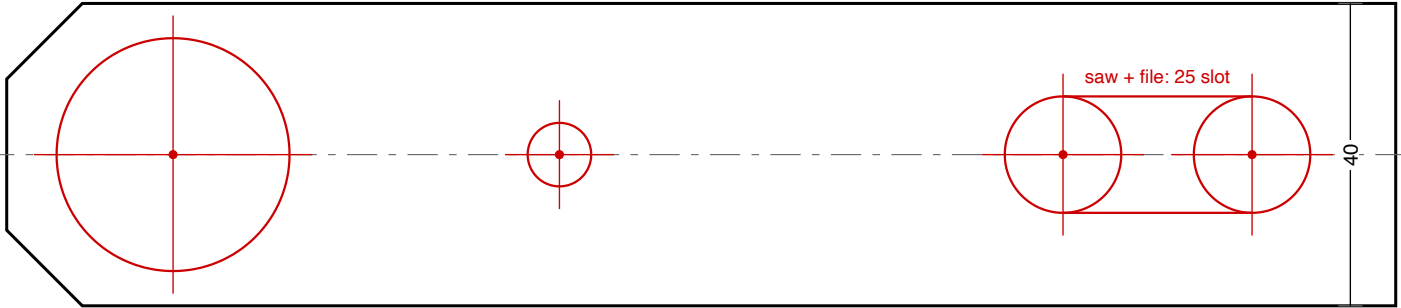

Chamfer 10x10 on both rear corners · every hole is on the centreline, 20.0 from either edge.  
Wheel end is a 25 mm SLOT for the belt tensioner: drill Ø15.4 at 139.7 and at 164.7, saw out the web between them, then file the sides parallel.  
Cut 1 mm long at the wheel end — arm length C = 117.4 is sacred and gets filed to final position with the belt fitted (blueprint §9.2), never guessed.

SCALE CHECK — this scale must measure exactly 150 mm



and this one 50 mm



**If it does not measure right, do not cut — reprint.**

Reprint percentage = 15000 ÷ (the mm you actually measured).

| if the 150 mm scale reads... | reprint at         |
|------------------------------|--------------------|
| 135 mm                       | 111%               |
| 138 mm                       | 109%               |
| 141 mm                       | 106%               |
| 144 mm                       | 104%               |
| 147 mm                       | 102%               |
| 150 mm                       | correct — go ahead |

Paper also grows/shrinks with humidity — ±0.3 mm over 150 is normal.

HOLE LAYOUT (mm from the chamfered end, on the centreline)


|                                 |               |
|---------------------------------|---------------|
| Overall length                  | 183.7         |
| Bar width (stock)               | 40.0          |
| Centreline, from either edge    | 20.0          |
| Chamfer, both rear corners      | 10 x 10       |
| Ø30.8 pivot bushing, from datum | 22.0          |
| Ø8.4 brace, from datum          | 73.1          |
| Ø15.4 slot, centres from datum  | 139.7 → 164.7 |

The paper is a convenience, not the datum — these numbers are. If in doubt, mark them with a rule and a square straight onto the bar and centre-punch.

40 x 6.35 (¼") flat bar


**PRINT AT 100% / “ACTUAL SIZE” — NOT “Fit to page”, NOT “Shrink oversized pages”.**  
A4 or US Letter both work — this page is smaller than either. Check the ruler below BEFORE you cut or drill.

DATUM — chamfered (rear/pivot) end

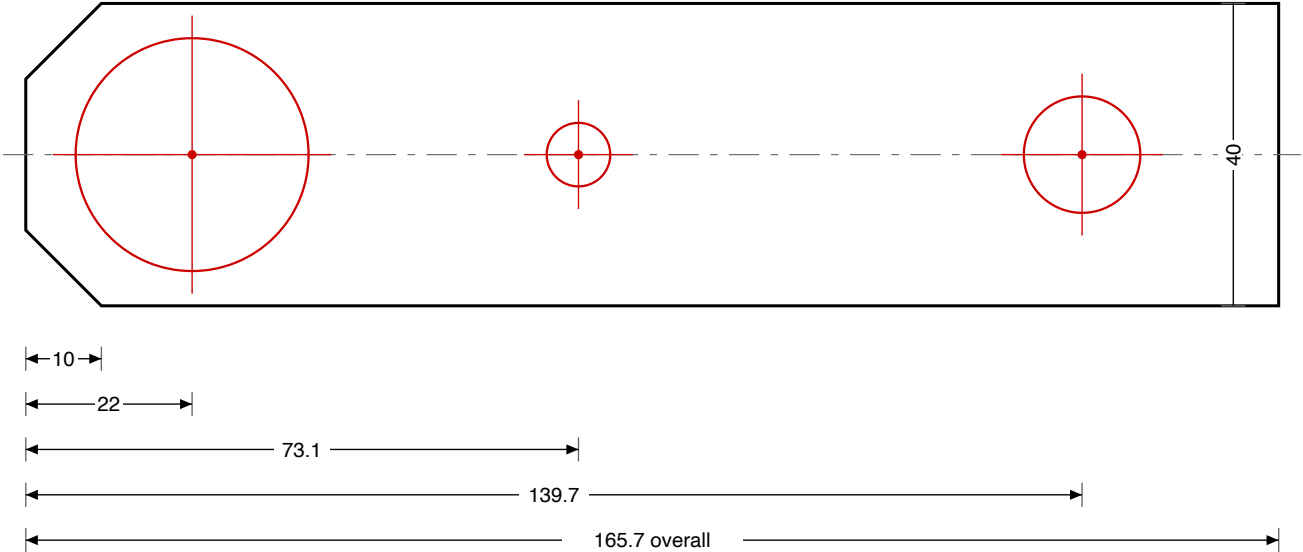


Chamfer 10x10 on both rear corners · every hole is on the centreline, 20.0 from either edge.  
Plain round axle bore Ø15.4 at the wheel end — no slot (that is the trailing bar only).  
The two plates of a fork are identical: clamp them together and drill them as a pair.  
Cut 1 mm long at the wheel end — arm length C = 117.4 is sacred and gets filed to final position with the belt fitted (blueprint §9.2), never guessed.

**SCALE CHECK — this scale must measure exactly 150 mm**



**and this one 50 mm**

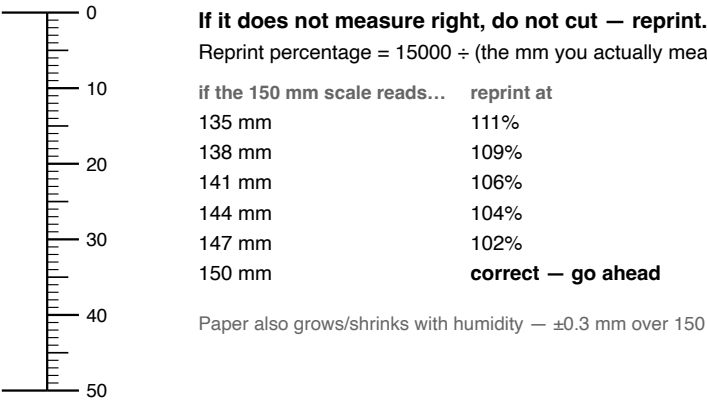

**If it does not measure right, do not cut — reprint.**  
Reprint percentage = 15000 ÷ (the mm you actually measured).  
  
if the 150 mm scale reads...      reprint at  
135 mm                                  111%  
138 mm                                  109%  
141 mm                                  106%  
144 mm                                  104%  
147 mm                                  102%  
150 mm                                  **correct — go ahead**

Paper also grows/shrinks with humidity — ±0.3 mm over 150 is normal.


**HOLE LAYOUT (mm from the chamfered end, on the centreline)**

|                                 |         |
|---------------------------------|---------|
| Overall length                  | 165.7   |
| Bar width (stock)               | 40.0    |
| Centreline, from either edge    | 20.0    |
| Chamfer, both rear corners      | 10 x 10 |
| Ø30.8 pivot bushing, from datum | 22.0    |
| Ø8.4 brace, from datum          | 73.1    |
| Ø15.4 idler axle, from datum    | 139.7   |

The paper is a convenience, not the datum — these numbers are. If in doubt, mark them with a rule and a square straight onto the bar and centre-punch.


50 x 6 bar · no keel hole

**PRINT AT 100% / “ACTUAL SIZE” — NOT “Fit to page”, NOT “Shrink oversized pages”.**  
A4 or US Letter both work — this page is smaller than either. Check the ruler below BEFORE you cut or drill.

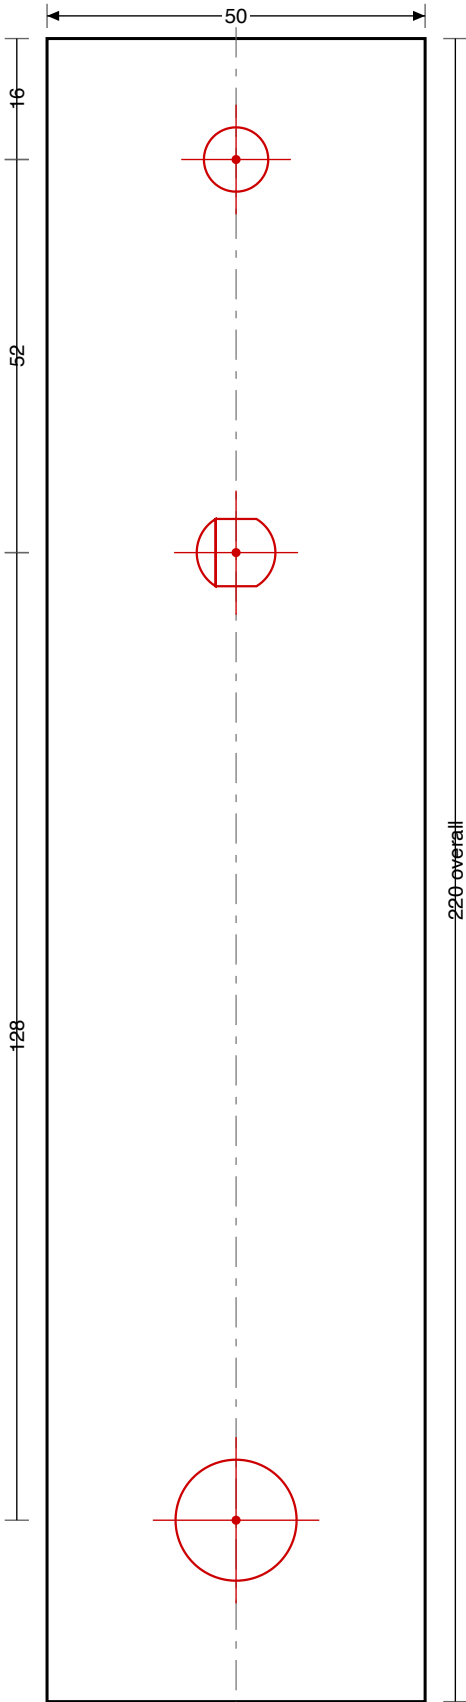


Ø8.5 — M8 into the fork leg  
Ø10.4 with two flats 8.9 apart:  
the hub-axle torque-arm key. Drill  
Ø10.4, then file the two flats to  
8.9 across. No slot — a slot here  
lets the axle rotate.  
Ø16 pivot bore: drill 15.5 and  
ream/file to a snug 16 — always as  
a clamped pair, so both carriers of  
a pod match.

**SCALE CHECK — this scale must measure exactly 100 mm**



**and this one 50 mm**



**If it does not measure right, do not cut — reprint.**  
Reprint percentage =  $10000 \div (\text{the mm you actually measured})$ .

| if the 100 mm scale reads... | reprint at                |
|------------------------------|---------------------------|
| 90 mm                        | 111%                      |
| 92 mm                        | 109%                      |
| 94 mm                        | 106%                      |
| 96 mm                        | 104%                      |
| 98 mm                        | 102%                      |
| 100 mm                       | <b>correct — go ahead</b> |

Paper also grows/shrinks with humidity —  $\pm 0.2$  mm over 100 is normal.

**CARRIER LAYOUT (mm)**

|                                      |     |
|--------------------------------------|-----|
| Overall length                       | 220 |
| Strip width (stock)                  | 50  |
| Ø8.5 fork bolt, from the near end    | 16  |
| Ø10.4 axle key — above the fork bolt | 52  |
| Ø16 pivot — below the axle key       | 128 |
| All features on the centreline       | 25  |


The paper is a convenience, not the datum — these numbers are. If in doubt, mark them with a rule and a square straight onto the bar and centre-punch.

40 x 6 flat bar · offcuts

**PRINT AT 100% / “ACTUAL SIZE” — NOT “Fit to page”, NOT “Shrink oversized pages”.**  
A4 or US Letter both work — this page is smaller than either. Check the ruler below BEFORE you cut or drill.


**SHOCK TAB STUB x8**

40x6 · laps 17 mm onto the carrier OUTER face

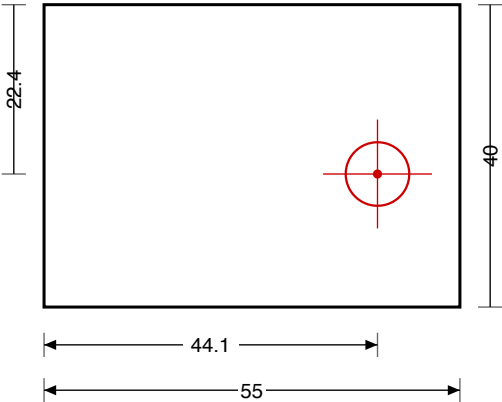


**BRACE WEB — TRAILING x2**

40x6 offcut · no holes · nests inside the leading brace

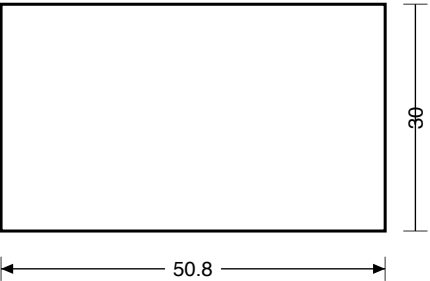


**BRACE WEB — LEADING x2**

40x6 offcut · no holes · the leading fork is the wider one

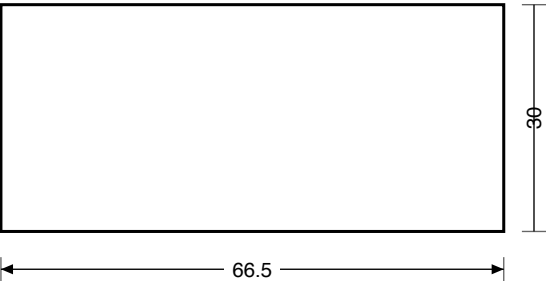


**TENSIONER LUG x2**

40x6 · 26 long, rip down to 18 wide



**SCALE CHECK — this scale must measure exactly 150 mm**



**and this one 40 mm**



**If it does not measure right, do not cut — reprint.**

Reprint percentage = 15000 ÷ (the mm you actually measured).

| if the 150 mm scale reads... | reprint at         |
|------------------------------|--------------------|
| 135 mm                       | 111%               |
| 138 mm                       | 109%               |
| 141 mm                       | 106%               |
| 144 mm                       | 104%               |
| 147 mm                       | 102%               |
| 150 mm                       | correct — go ahead |

Paper also grows/shrinks with humidity — ±0.3 mm over 150 is normal.