

TrackScooter — Plate Cutting Sheet


Rev 010 (cut rim, design of record) with Rev 009 (no-cut) differences noted · 2026-07-26 · quantities for the WHOLE VEHICLE (2 pods) · all dimensions mm · source of truth: apollo_track_pod.scad


Cut list

Plate	Qty	Stock	Cut — Rev 010	Rev 009 difference	Holes / features (on centreline unless noted)
Carrier strips	4	50 × 6	224	identical	hub-axle slot Ø10 with flats (datum 0) · M8 fork-leg hole at +52 · pivot bore Ø30.8 at -132 (ream in pairs). NO keel holes — the keel was deleted in BOTH revisions (2026-07-26)
Arm bars, trailing	4	40 × 6.35	≈185	≈177	pivot bore Ø30.8 · shock bolt Ø8 at 50.5 from pivot (Rev 009: 47.0 — drill BOTH) · 25 mm tensioner slot at the tip (Ø15 wide)
Arm bars, leading	4	40 × 6.35	≈166	≈158	pivot bore Ø30.8 · shock bolt Ø8 (both stations) · plain Ø15 axle hole at the tip
Cross-brace webs ("arms join")	2 + 2	40×6 offcut	2× ≈51 (trailing) + 2× ≈66.5 (leading), trimmed to ~30 wide	weld at 22–52 from pivot (vs 28–58); lengths identical	no holes — welded between each arm's two plates. Lengths DIFFER per arm: the leading fork is wider

					(plates ±33.25 vs ±25.4) because the forks nest at the pivot. Cut 1 mm long, file to a snug slip fit at dry assembly
Tensioner lugs ("lug plate")	4	40 × 6	40 × 20 (one straight chop of the bar)	identical	M6 clearance hole at the 34-behind- axle station; extra length points REARWARD (away from the axle, so the eye nut never crowds it at full take-up); welded on the trailing plates' OUTER faces
Shock tab stubs	8	40 × 6	55	identical	Ø8 hole for the upper shock pin; lap-welded on carrier OUTER faces at hub level (upper eye lands at ±50, -8.5 from hub centre)

Shop rules: cut bars 1 mm long and file square · drill from the 1:1 printed template (plates_rev010.dxf / plates_rev009.dxf), centre-punch first · pivot bores Ø30 hole-saw then hand-ream to 30.8, always in pairs · arm bars are the **ONLY** version-dependent plates — cut them last, after the rim-cut decision · carrier keel hole + both shock-bolt stations pre-drilled = one steel set serves both revisions.

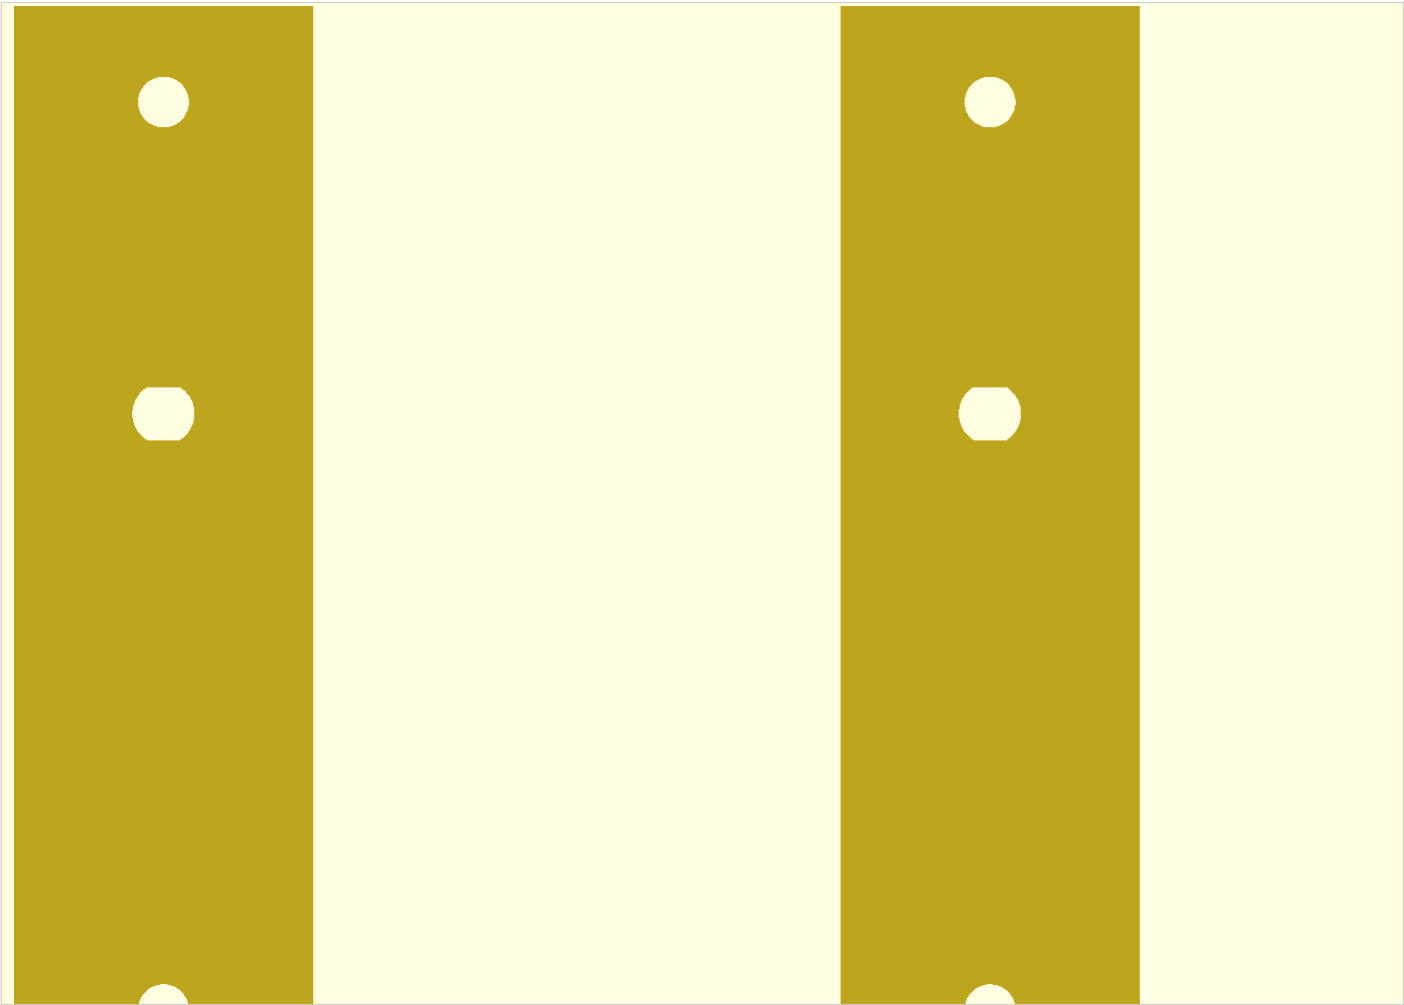

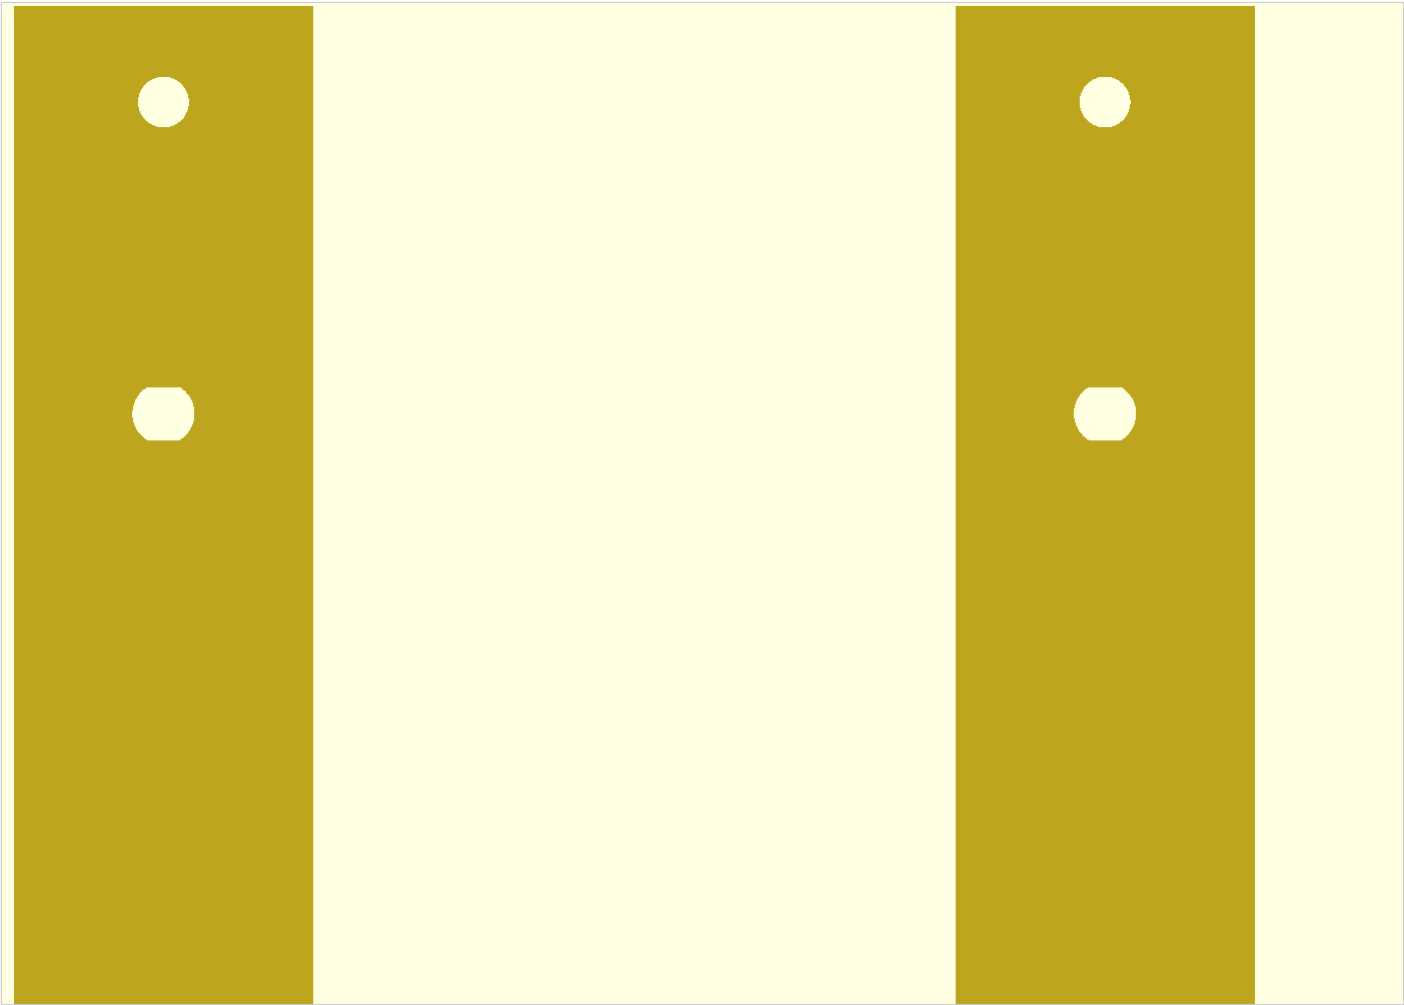

Brace webs and tensioner lugs are offcut pieces and are not in the DXF layout — dimensions above.