


22-1 DELIVERY

The network layer supervises the handling of the packets by the underlying physical networks. We define this handling as the delivery of a packet.


Topics discussed in this section:

Direct Versus Indirect Delivery

Figure 22.1 *Direct and indirect delivery*

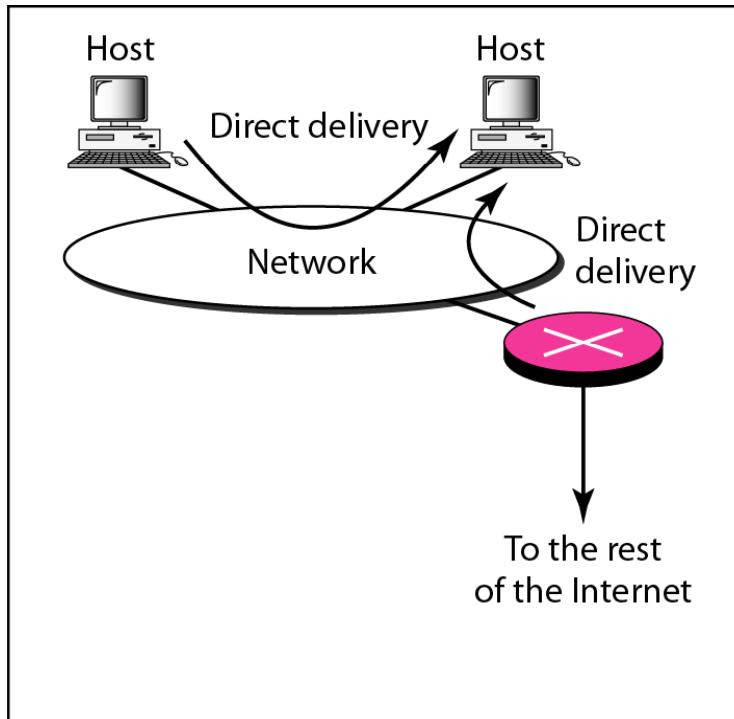

a. Direct delivery

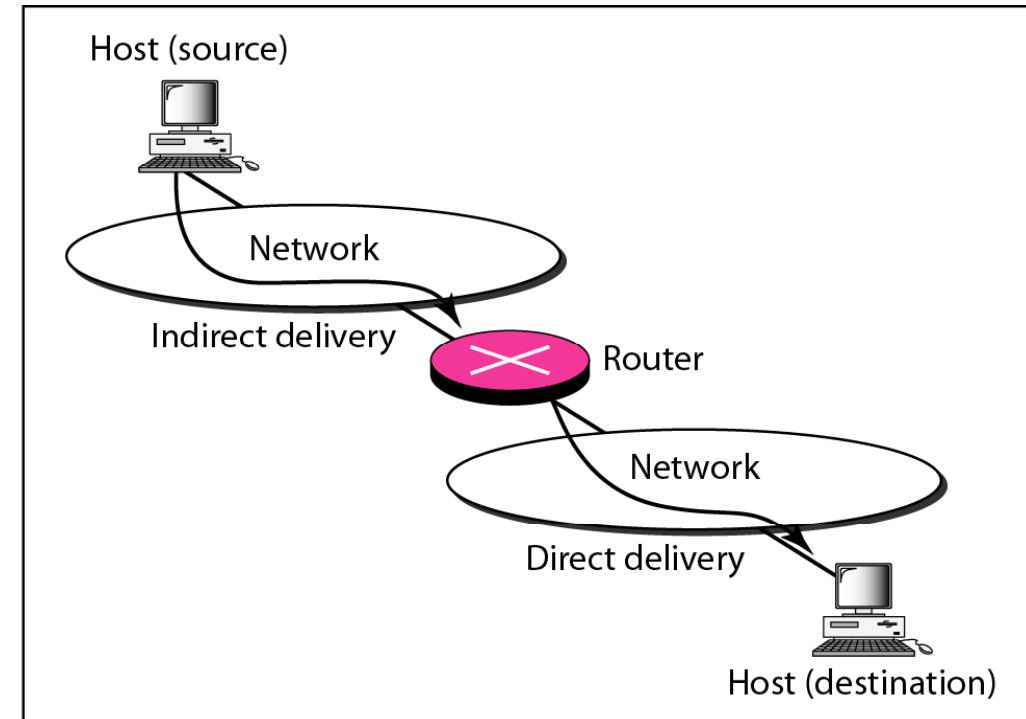

b. Indirect and direct delivery

22-2 FORWARDING

Forwarding means to place the packet in its route to its destination. Forwarding requires a host or a router to have a routing table. When a host has a packet to send or when a router has received a packet to be forwarded, it looks at this table to find the route to the final destination.

Topics discussed in this section:

Forwarding Techniques

Forwarding Process

Routing Table

Figure 22.2 *Route method versus next-hop method*

a. Routing tables based on route

Destination	Route
Host B	R1, R2, host B

Routing table
for host A

Destination	Route
Host B	R2, host B

Routing table
for R1

Destination	Route
Host B	Host B

Routing table
for R2

b. Routing tables based on next hop

Destination	Next hop
Host B	R1

Destination	Next hop
Host B	R2

Destination	Next hop
Host B	---

Host A



Network

R1

Network

R2

Host B



Network

Figure 22.3 Host-specific versus network-specific method

Routing table for host S based
on host-specific method

Destination	Next hop
A	R1
B	R1
C	R1
D	R1

Routing table for host S based
on network-specific method

Destination	Next hop
N2	R1

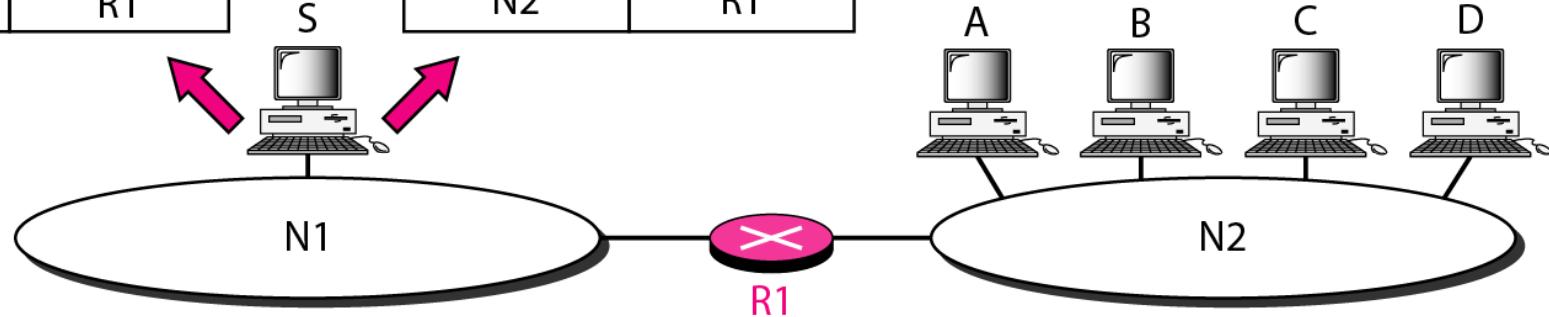


Figure 22.4 Default method



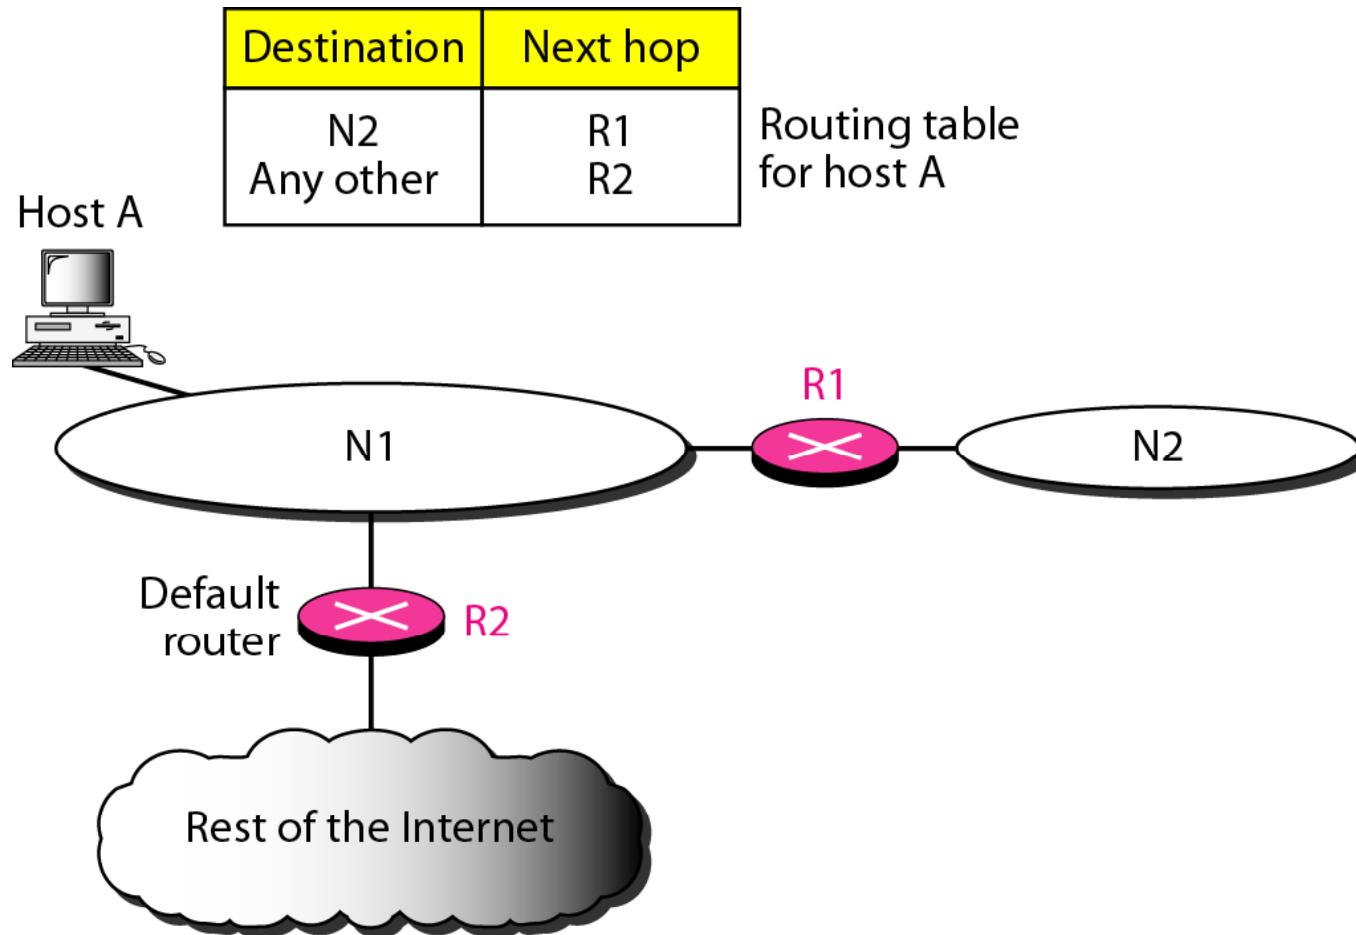



Figure 22.5 Simplified forwarding module in classless address

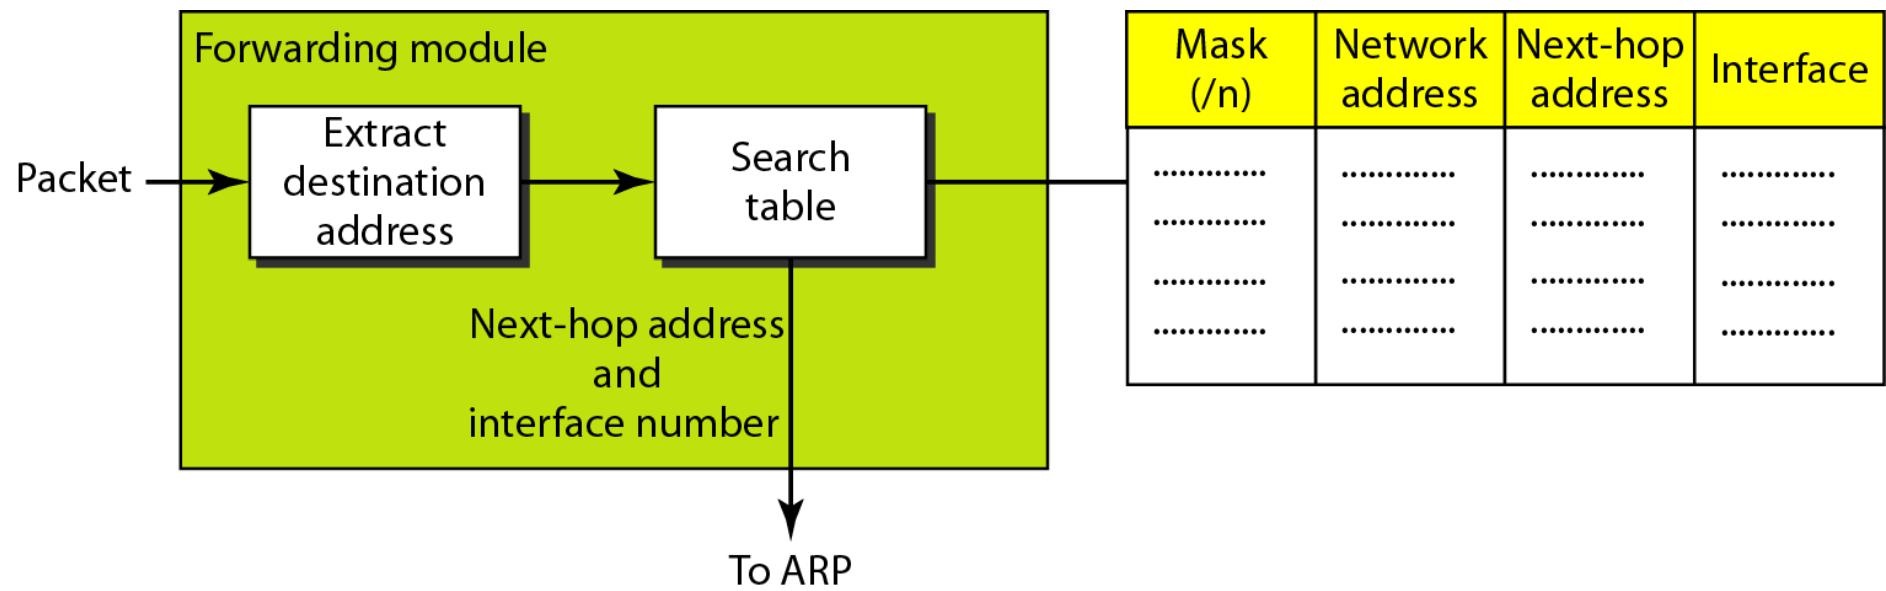



Note

In classless addressing, we need at least four columns in a routing table.



Example 22.1

Make a routing table for router R1, using the configuration in Figure 22.6.

Solution

Table 22.1 shows the corresponding table.

Figure 22.6 Configuration for Example 22.1


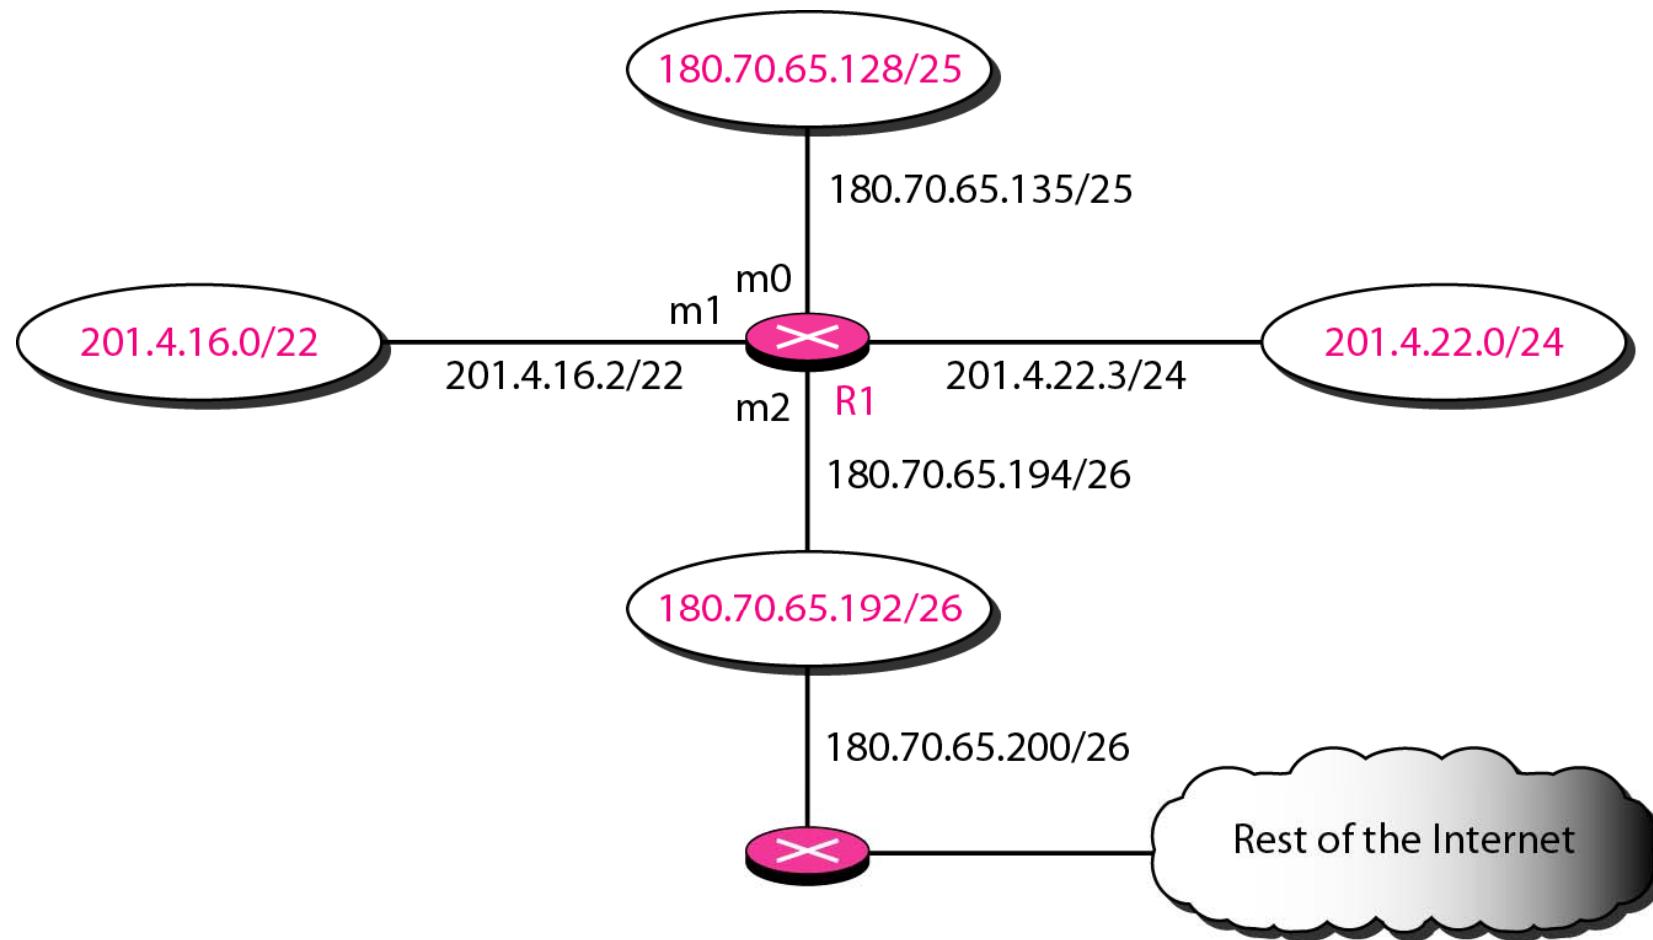


Table 22.1 *Routing table for router R1 in Figure 22.6*

<i>Mask</i>	<i>Network Address</i>	<i>Next Hop</i>	<i>Interface</i>
/26	180.70.65.192	—	m2
/25	180.70.65.128	—	m0
/24	201.4.22.0	—	m3
/22	201.4.16.0	m1
Any	Any	180.70.65.200	m2




Example 22.2

Show the forwarding process if a packet arrives at R1 in Figure 22.6 with the destination address 180.70.65.140.

Solution

The router performs the following steps:

- 1. The first mask (/26) is applied to the destination address. The result is 180.70.65.128, which does not match the corresponding network address.***
- 2. The second mask (/25) is applied to the destination address. The result is 180.70.65.128, which matches the corresponding network address. The next-hop address and the interface number m0 are passed to ARP for further processing.***




Example 22.3

Show the forwarding process if a packet arrives at R1 in Figure 22.6 with the destination address 201.4.22.35.

Solution


The router performs the following steps:

- 1. The first mask (/26) is applied to the destination address. The result is 201.4.22.0, which does not match the corresponding network address.***
- 2. The second mask (/25) is applied to the destination address. The result is 201.4.22.0, which does not match the corresponding network address (row 2).***



Example 22.3 (continued)

- 3.** *The third mask (/24) is applied to the destination address. The result is 201.4.22.0, which matches the corresponding network address. The destination address of the packet and the interface number m3 are passed to ARP.*




Example 22.4

Show the forwarding process if a packet arrives at R1 in Figure 22.6 with the destination address 18.24.32.78.

Solution

This time all masks are applied, one by one, to the destination address, but no matching network address is found. When it reaches the end of the table, the module gives the next-hop address 180.70.65.200 and interface number m2 to ARP. This is probably an outgoing package that needs to be sent, via the default router, to someplace else in the Internet.

Figure 22.7 Address aggregation

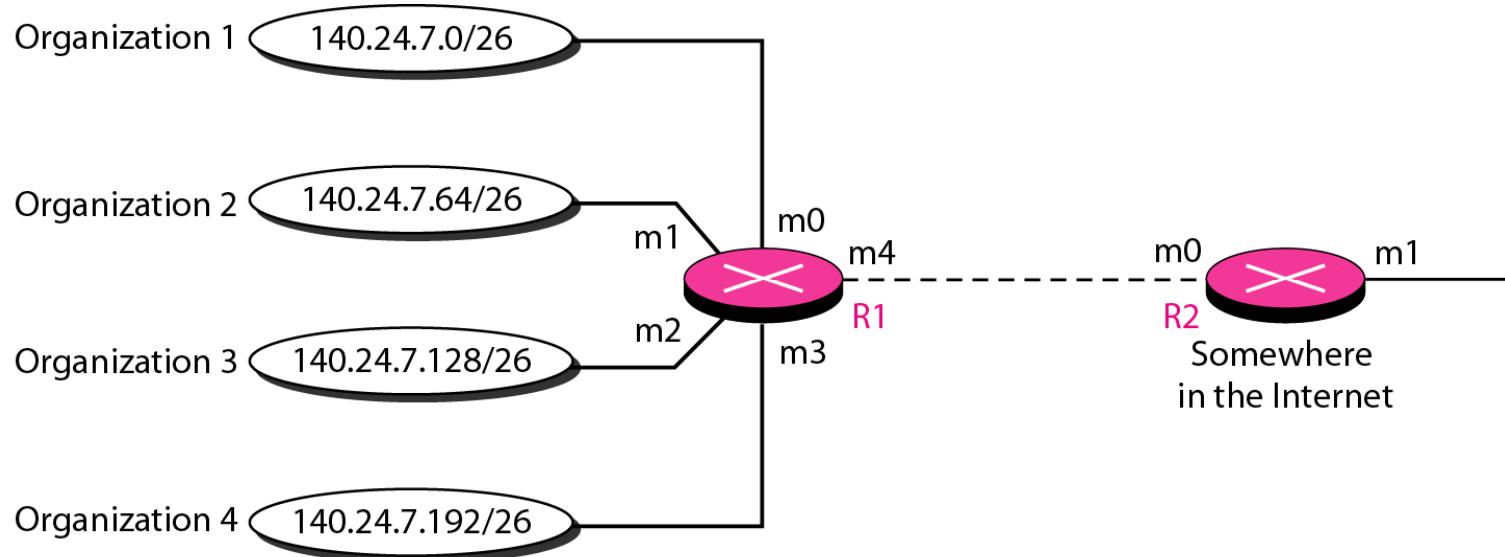


Mask	Network address	Next-hop address	Interface
/26	140.24.7.0	-----	m0
/26	140.24.7.64	-----	m1
/26	140.24.7.128	-----	m2
/26	140.24.7.192	-----	m3
/0	0.0.0.0	Default	m4


Routing table for R1

Mask	Network address	Next-hop address	Interface
/24	140.24.7.0	-----	m0
/0	0.0.0.0	Default	m1

Routing table for R2

Figure 22.8 Longest mask matching

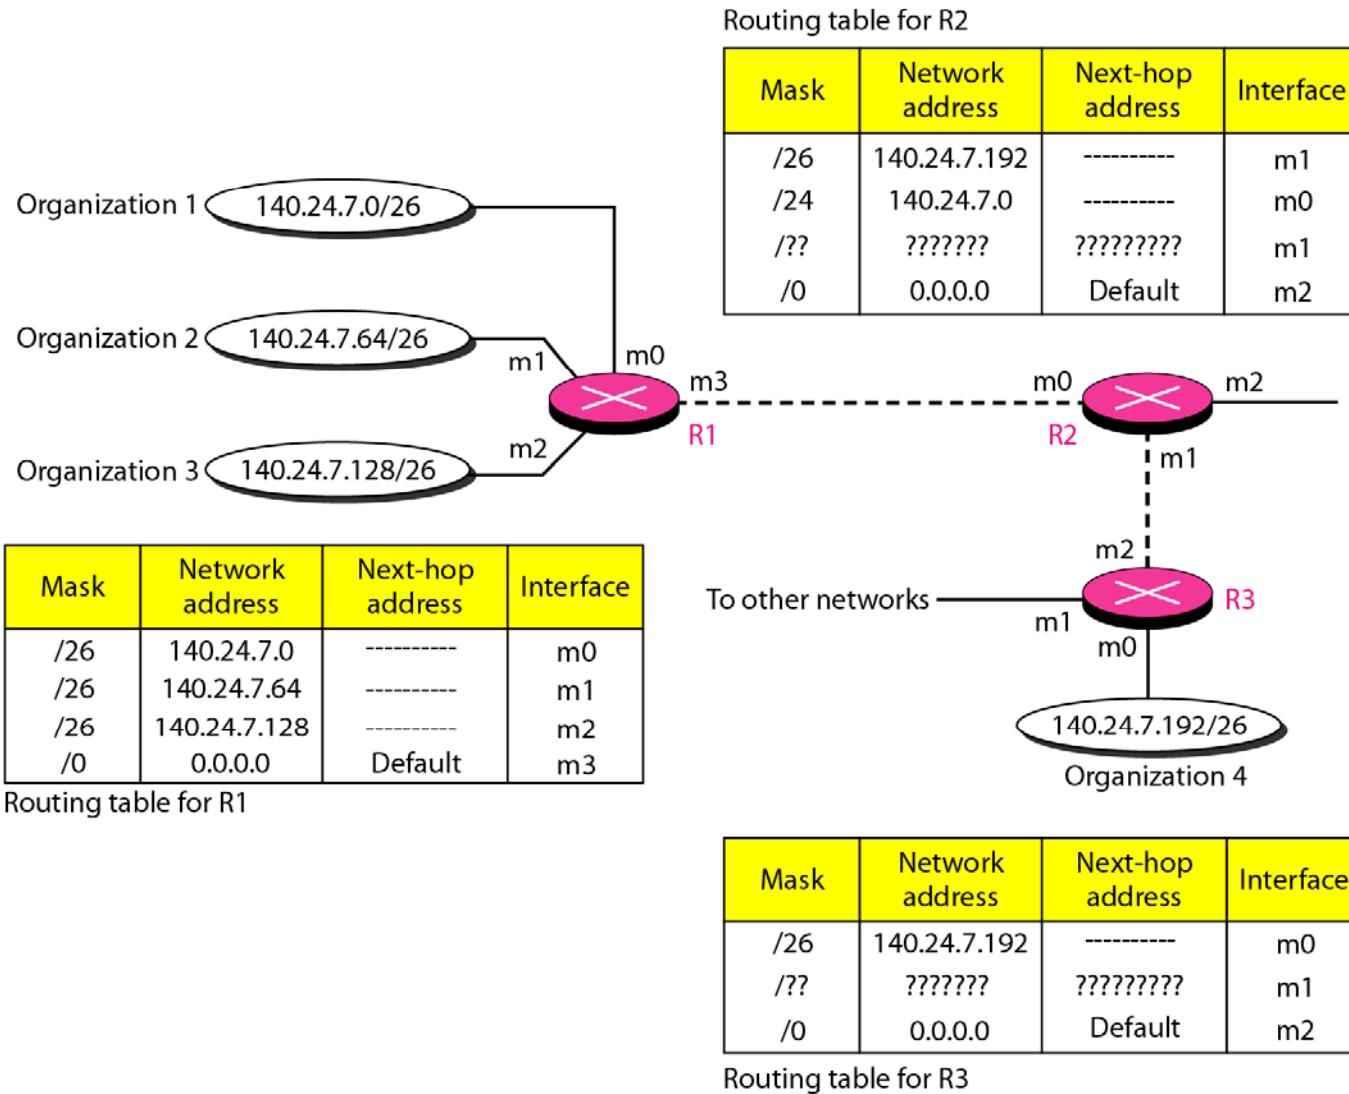




Example 22.5

As an example of hierarchical routing, let us consider Figure 22.9. A regional ISP is granted 16,384 addresses starting from 120.14.64.0. The regional ISP has decided to divide this block into four subblocks, each with 4096 addresses. Three of these subblocks are assigned to three local ISPs; the second subblock is reserved for future use. Note that the mask for each block is /20 because the original block with mask /18 is divided into 4 blocks.

The first local ISP has divided its assigned subblock into 8 smaller blocks and assigned each to a small ISP. Each small ISP provides services to 128 households, each using four addresses.



Example 22.5 (continued)

The second local ISP has divided its block into 4 blocks and has assigned the addresses to four large organizations.

The third local ISP has divided its block into 16 blocks and assigned each block to a small organization. Each small organization has 256 addresses, and the mask is /24.

There is a sense of hierarchy in this configuration. All routers in the Internet send a packet with destination address 120.14.64.0 to 120.14.127.255 to the regional ISP.

Figure 22.9 Hierarchical routing with ISPs


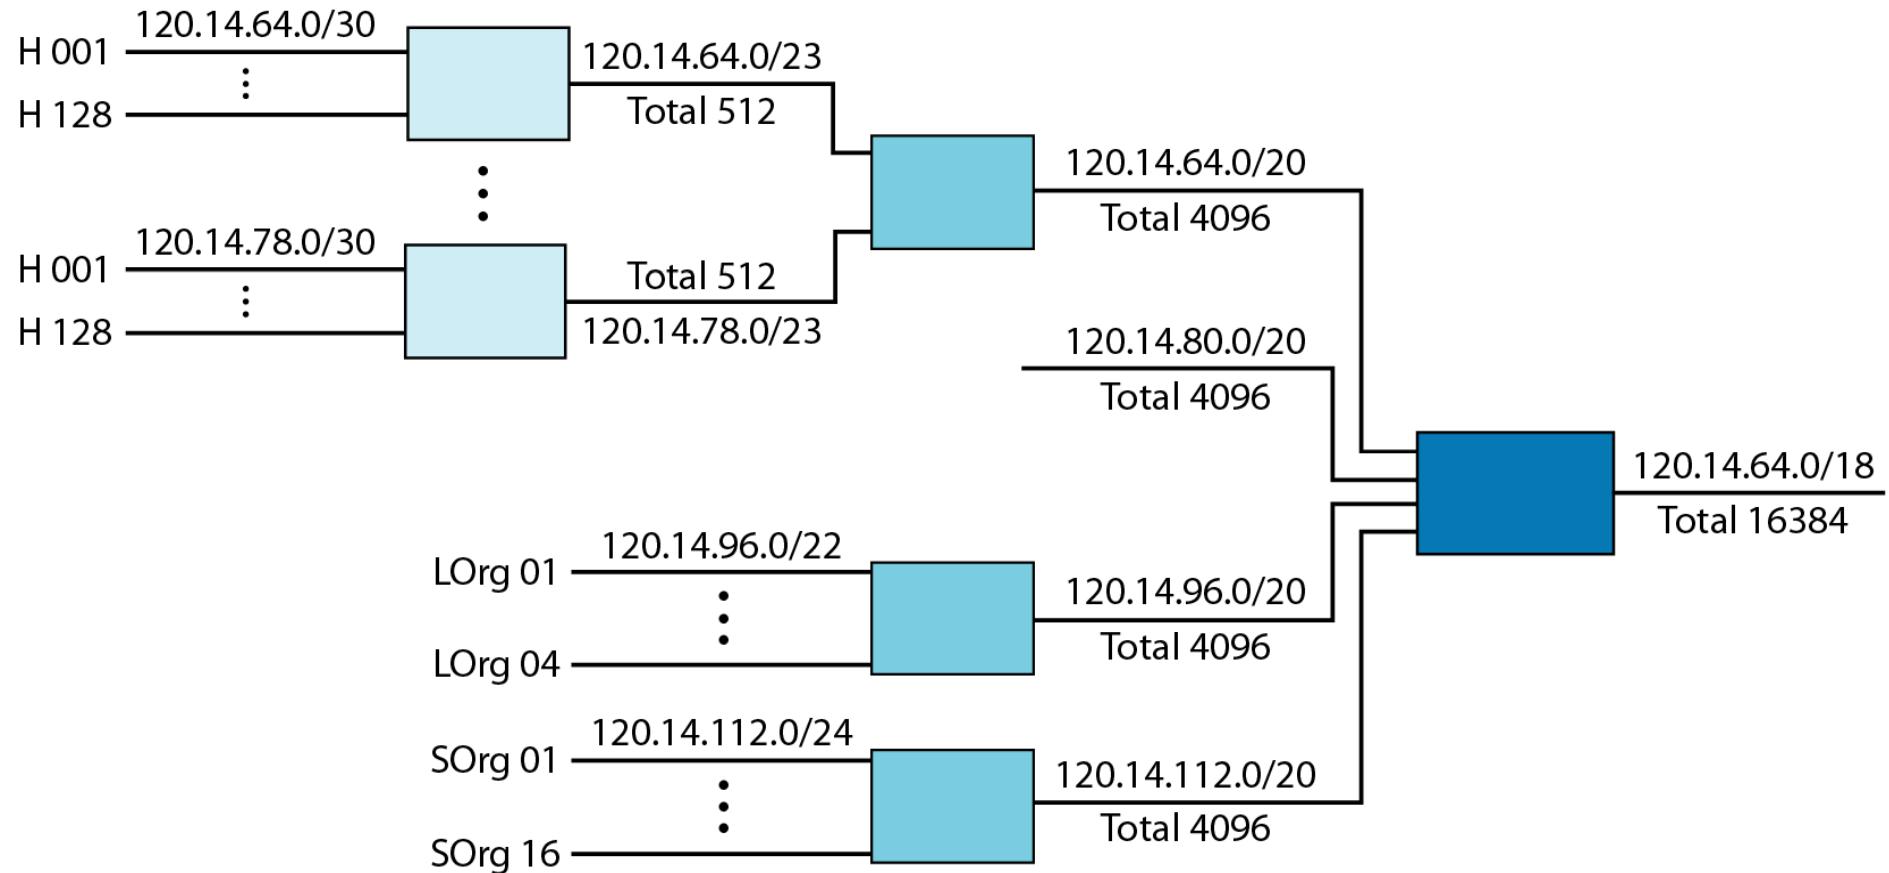



Figure 22.10 *Common fields in a routing table*

Mask	Network address	Next-hop address	Interface	Flags	Reference count	Use
.....



Example 22.6

*One utility that can be used to find the contents of a routing table for a host or router is **netstat** in UNIX or LINUX. The next slide shows the list of the contents of a default server. We have used two options, **r** and **n**. The option **r** indicates that we are interested in the routing table, and the option **n** indicates that we are looking for numeric addresses. Note that this is a routing table for a host, not a router. Although we discussed the routing table for a router throughout the chapter, a host also needs a routing table.*




Example 22.6 (continued)

```
$ netstat -rn
```

Kernel IP routing table

Destination	Gateway	Mask	Flags	Iface
153.18.16.0	0.0.0.0	255.255.240.0	U	eth0
127.0.0.0	0.0.0.0	255.0.0.0	U	lo
0.0.0.0	153.18.31.254	0.0.0.0	UG	eth0

The destination column here defines the network address. The term gateway used by UNIX is synonymous with router. This column actually defines the address of the next hop. The value 0.0.0.0 shows that the delivery is direct. The last entry has a flag of G, which means that the destination can be reached through a router (default router). The Iface defines the interface.




Example 22.6 (continued)

*More information about the IP address and physical address of the server can be found by using the **ifconfig** command on the given interface (eth0).*

```
$ ifconfig eth0
eth0  Link encap:Ethernet  HWaddr 00:B0:D0:DF:09:5D
      inet addr:153.18.17.11  Bcast:153.18.31.255  Mask:255.255.240.0
          ...
```

Figure 22.11 Configuration of the server for Example 22.6

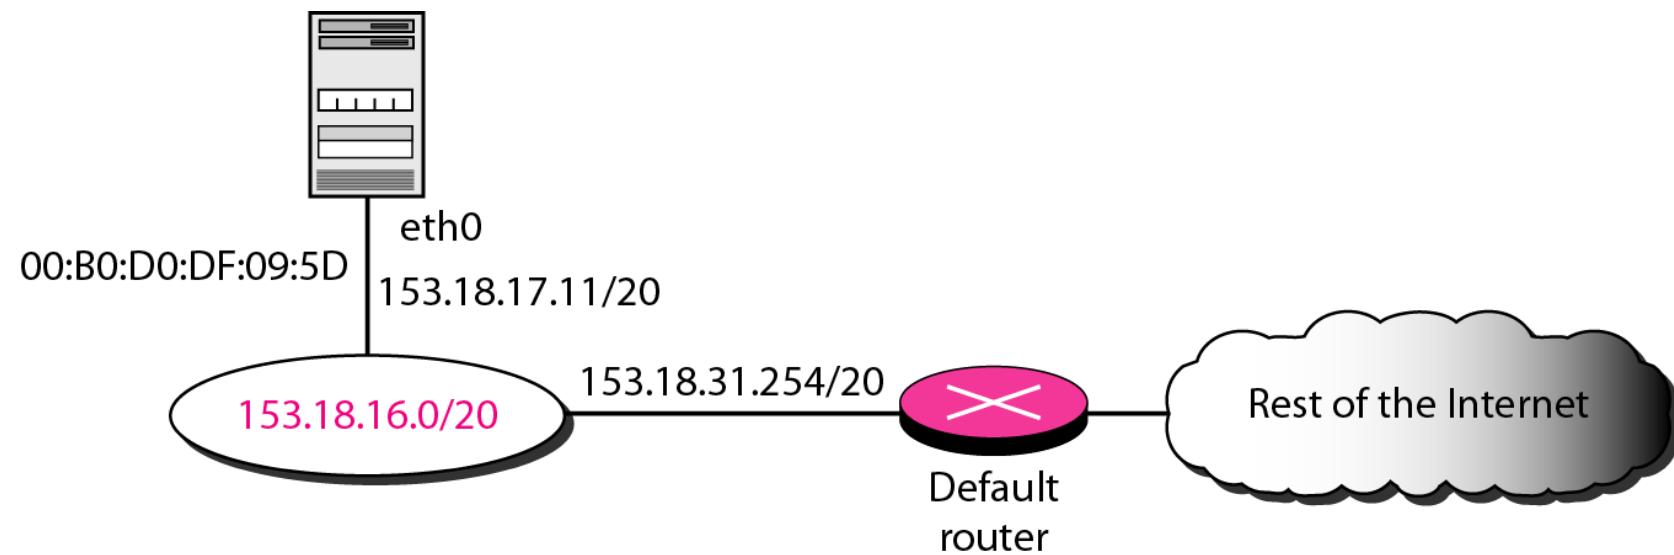

22-3 UNICAST ROUTING PROTOCOLS

A routing table can be either static or dynamic. A static table is one with manual entries. A dynamic table is one that is updated automatically when there is a change somewhere in the Internet. A routing protocol is a combination of rules and procedures that lets routers in the Internet inform each other of changes.

Topics discussed in this section:

Optimization

Intra- and Interdomain Routing

Distance Vector Routing and RIP

Link State Routing and OSPF

Path Vector Routing and BGP

Figure 22.12 Autonomous systems

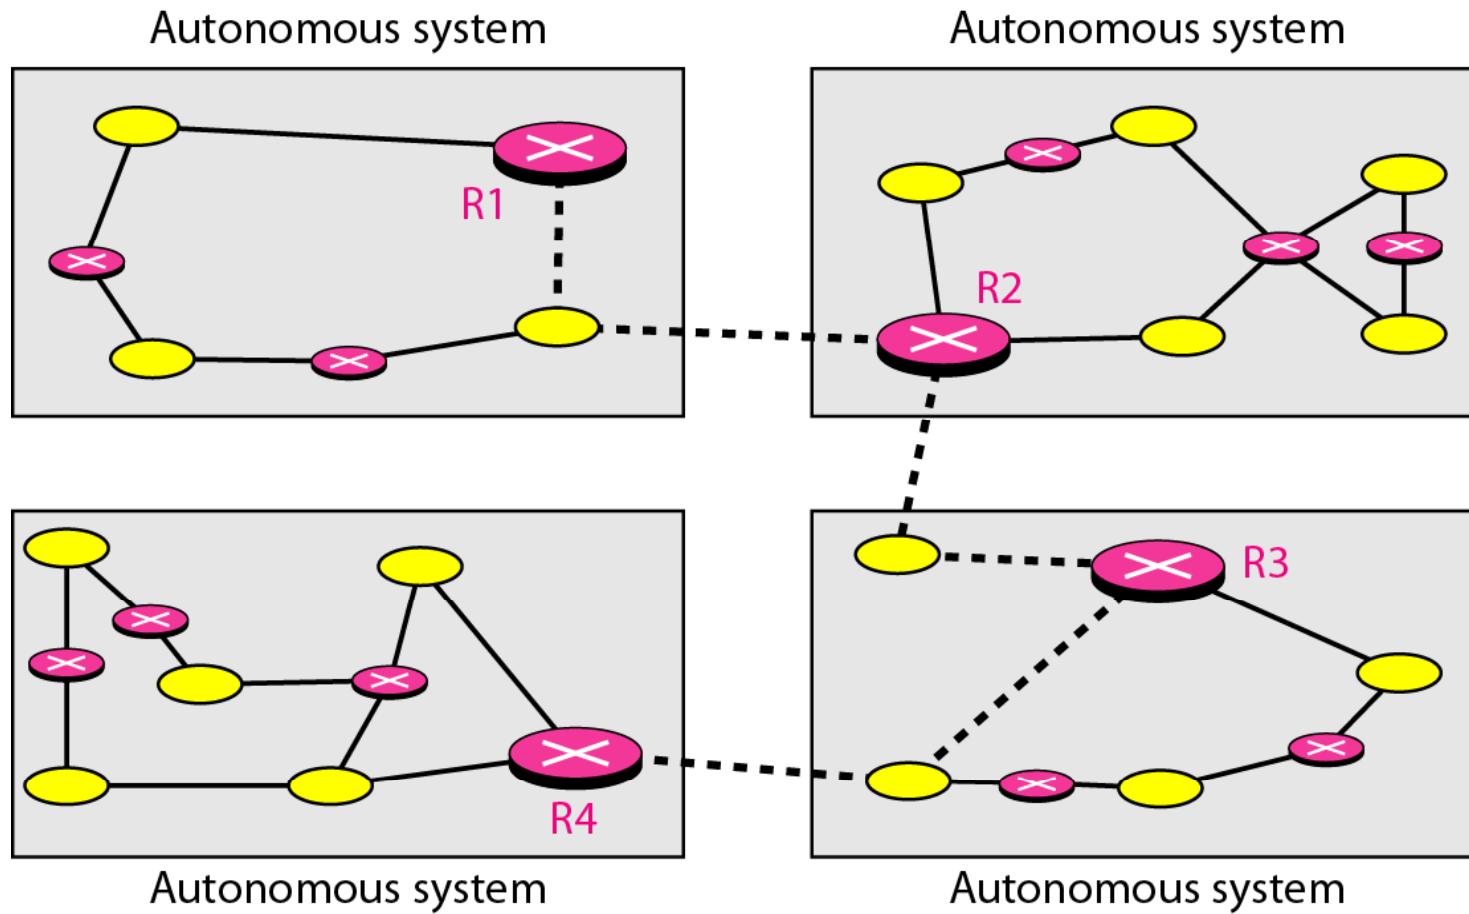


Figure 22.13 Popular routing protocols

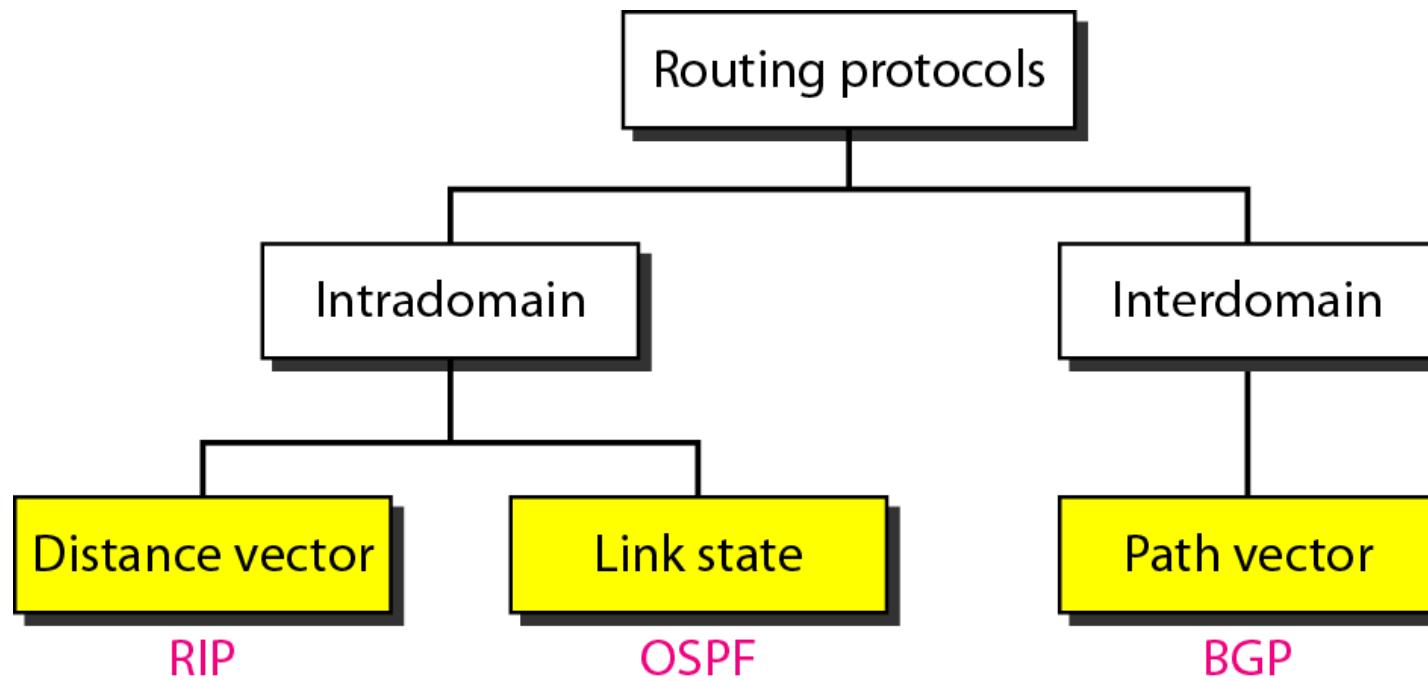


Figure 22.14 Distance vector routing tables



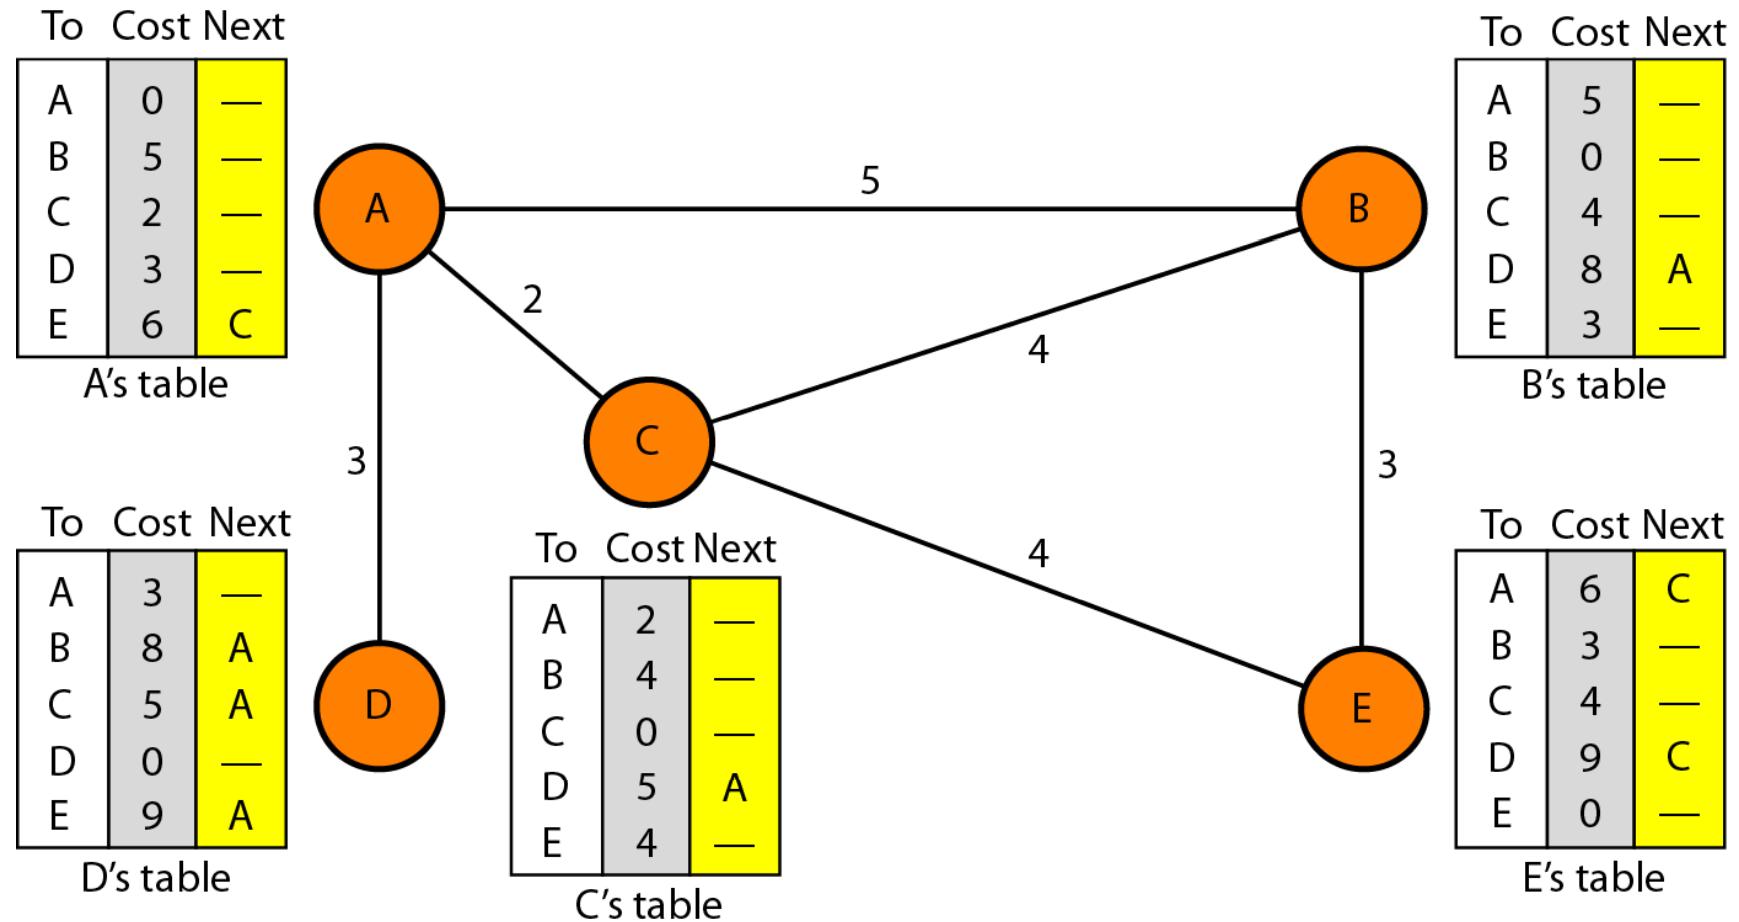


Figure 22.15 Initialization of tables in distance vector routing

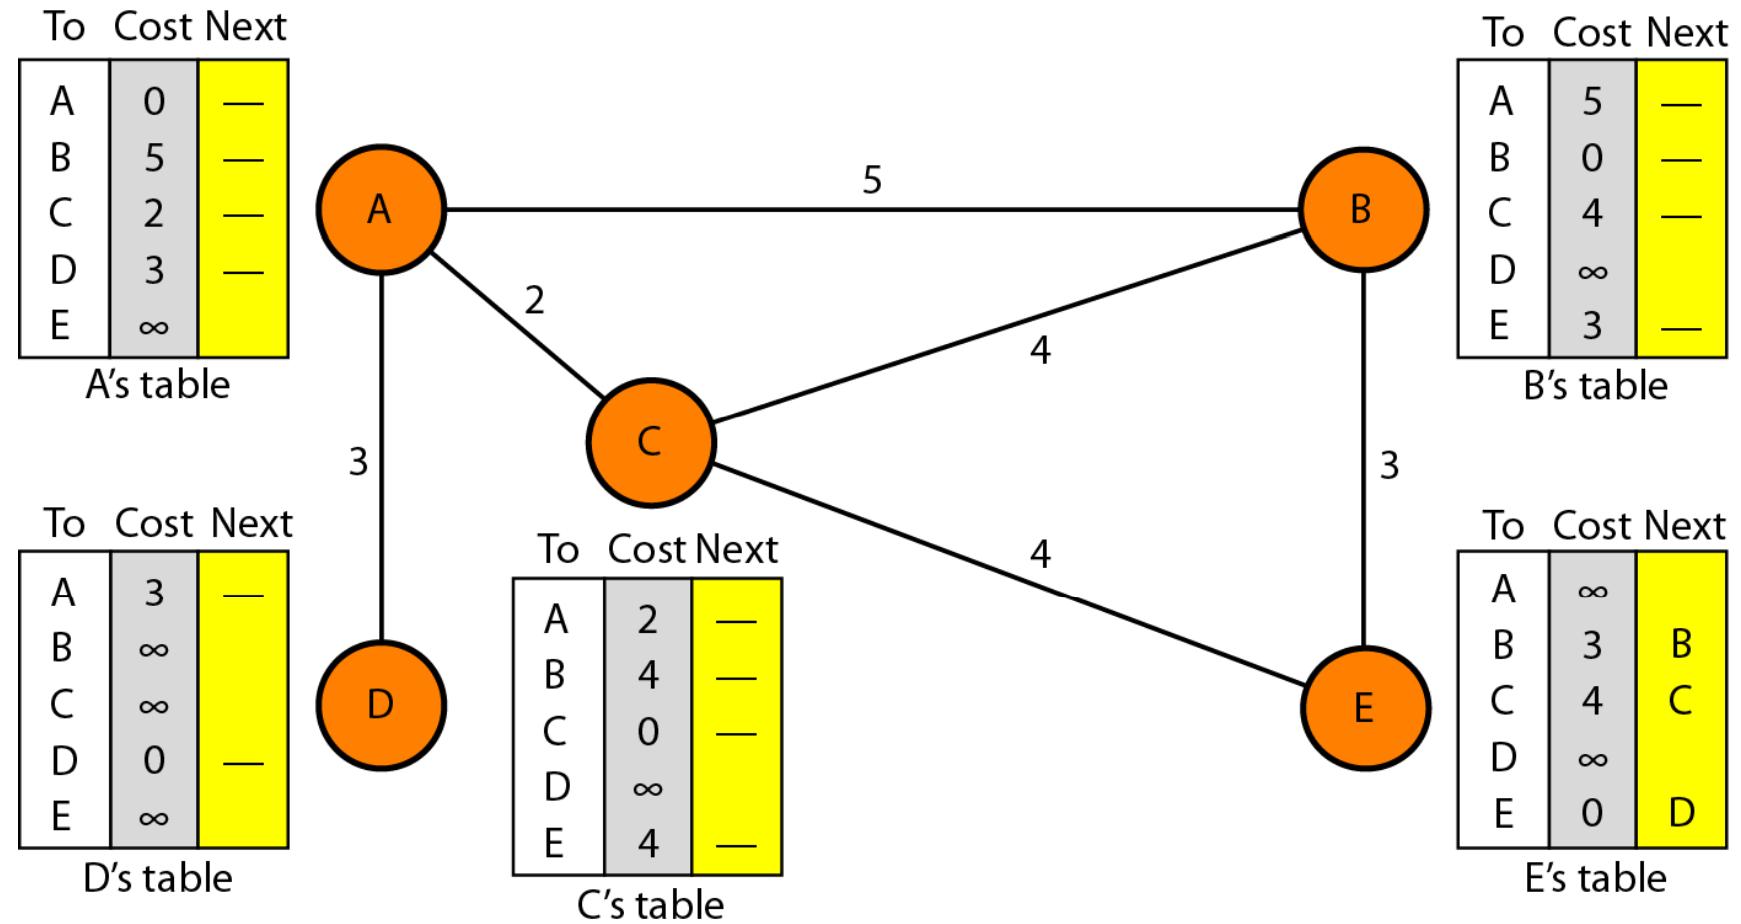



Note

In distance vector routing, each node shares its routing table with its immediate neighbors periodically and when there is a change.

Figure 22.16 Updating in distance vector routing

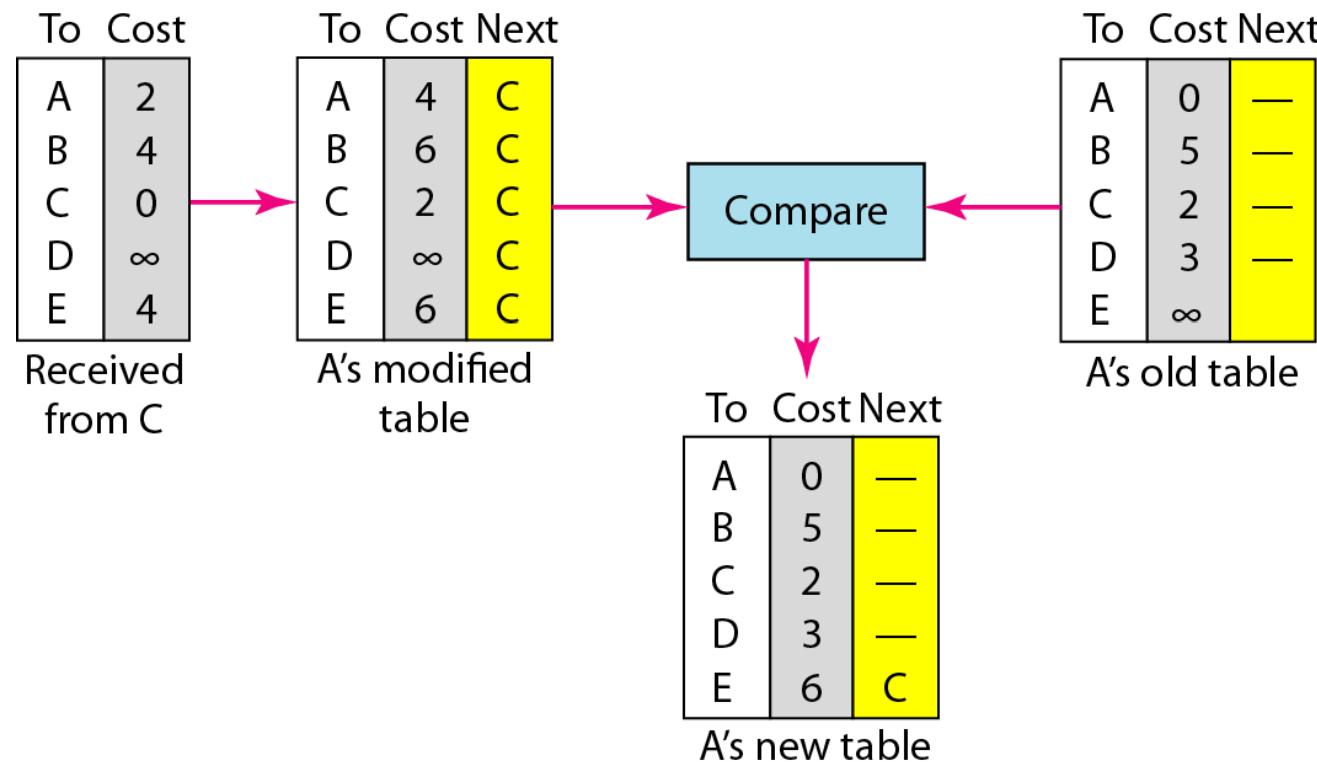


Figure 22.17 Two-node instability

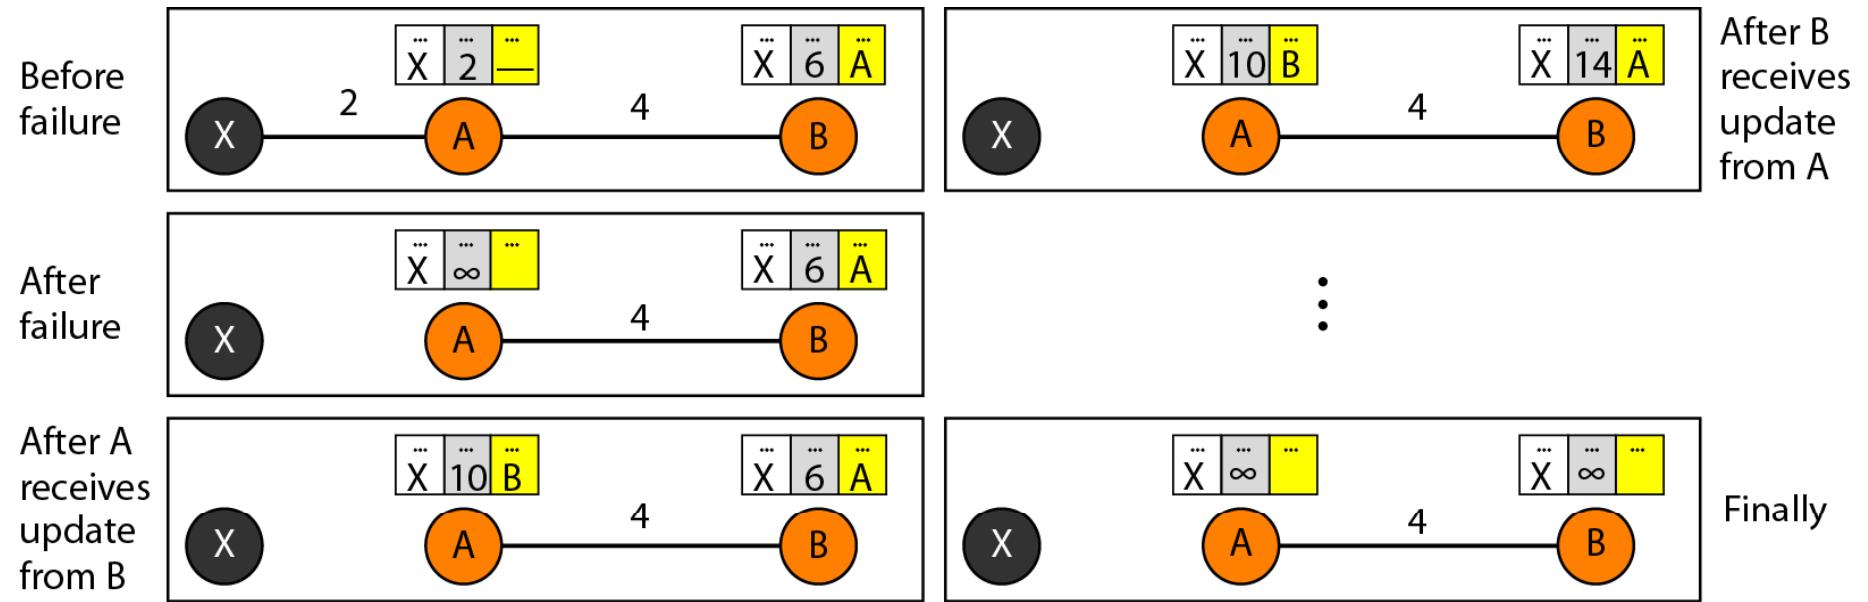


Figure 22.18 Three-node instability

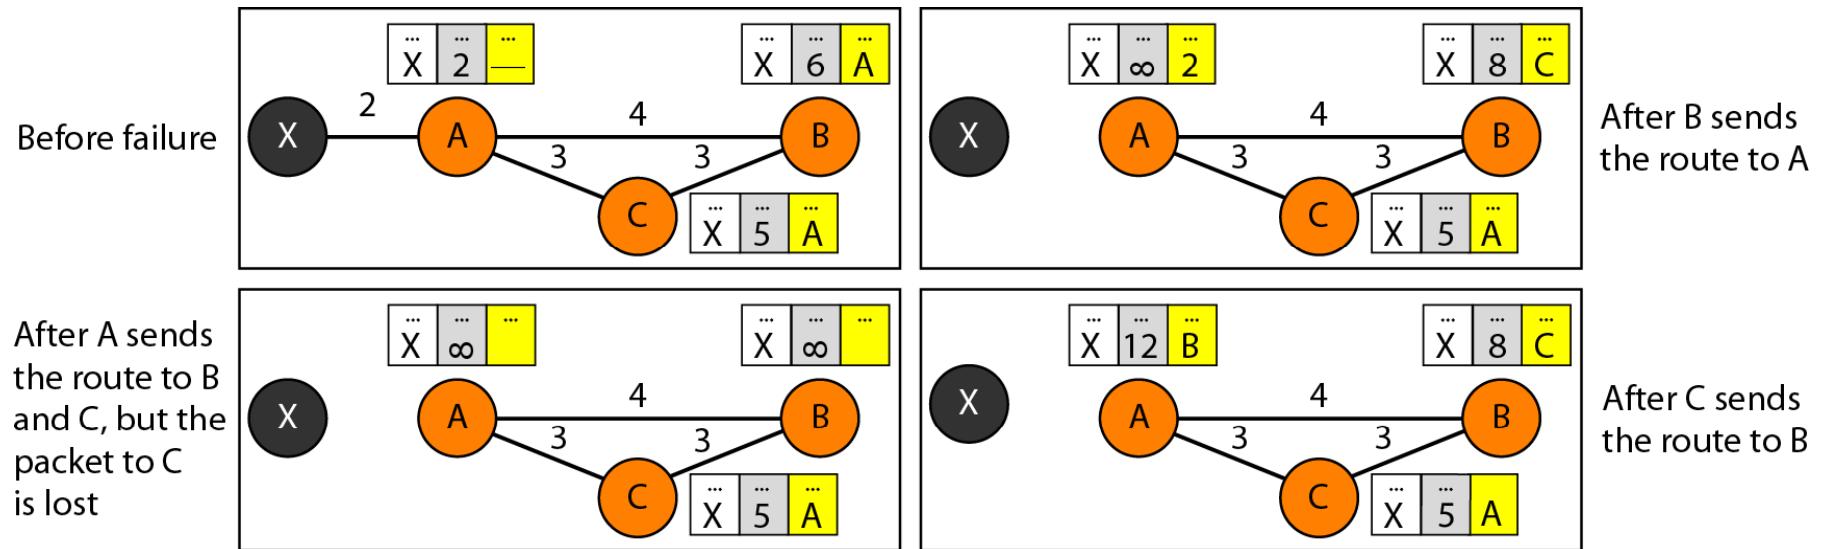


Figure 22.19 Example of a domain using RIP

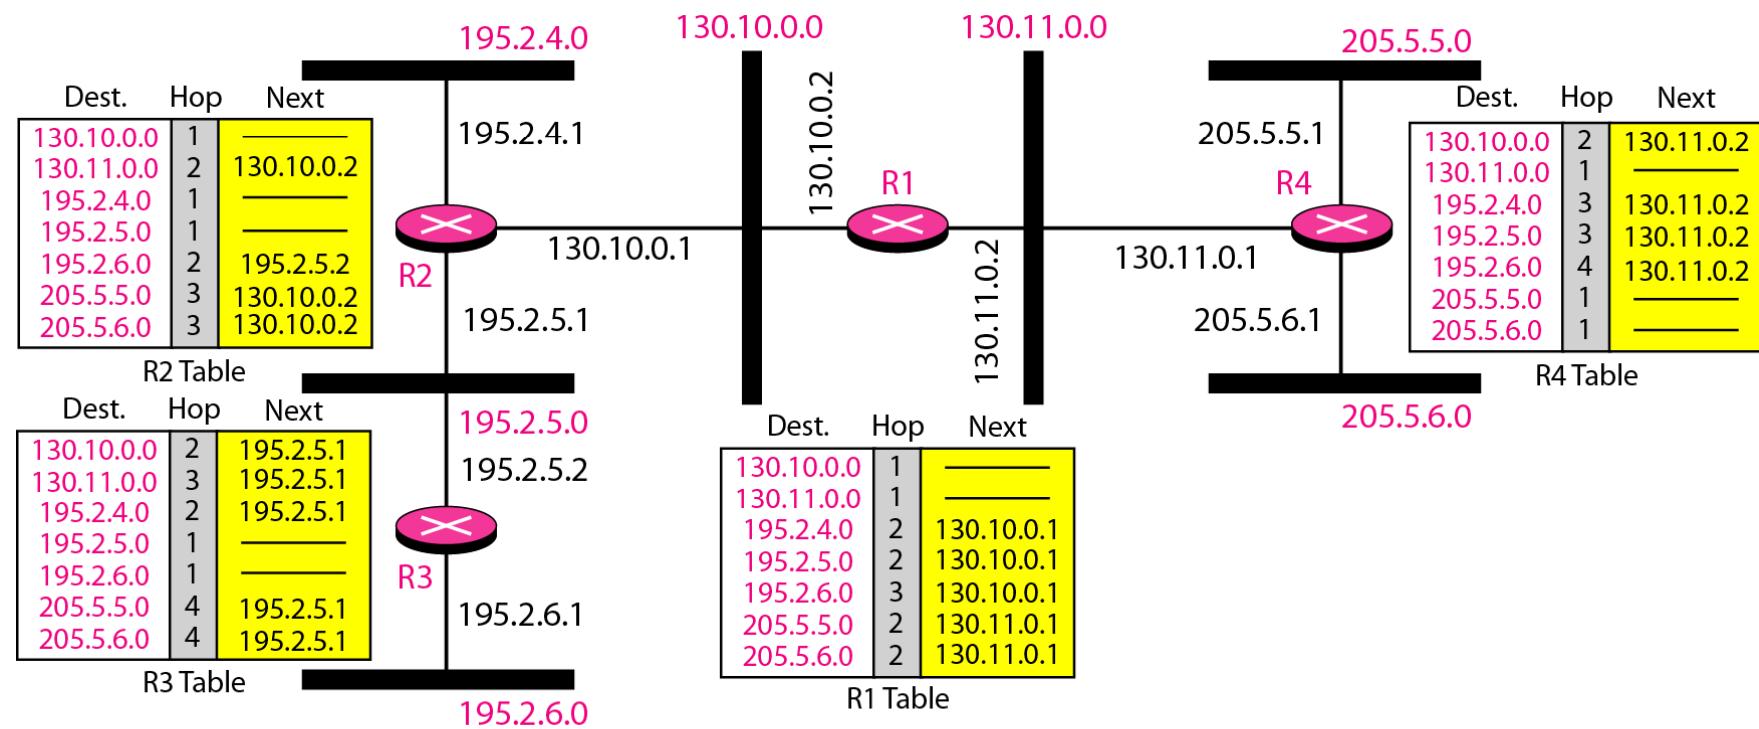


Figure 22.20 Concept of link state routing

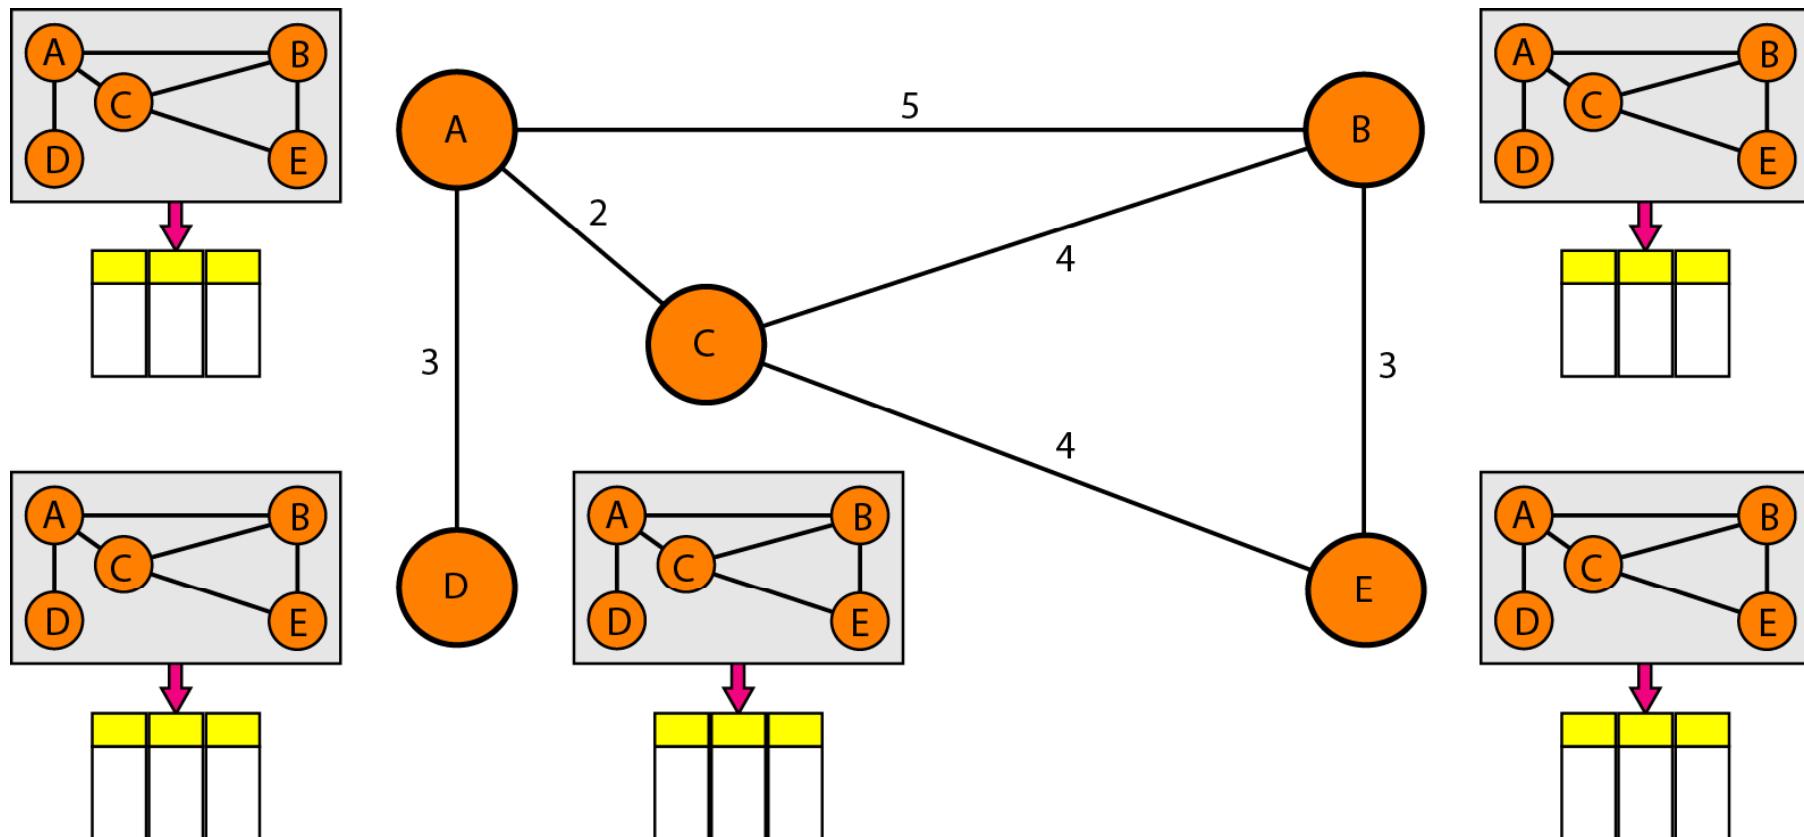


Figure 22.21 *Link state knowledge*

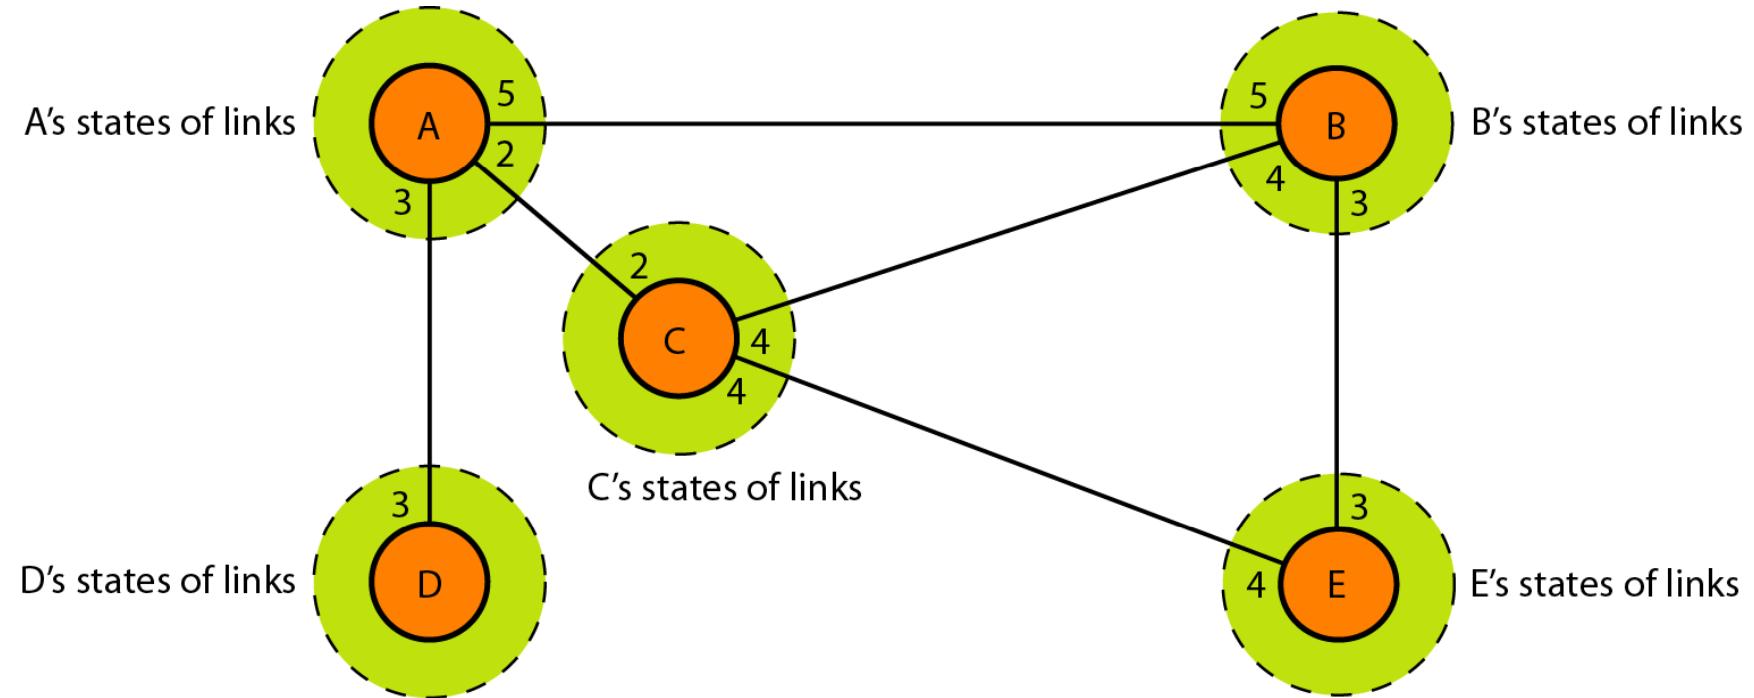


Figure 22.22 Dijkstra algorithm

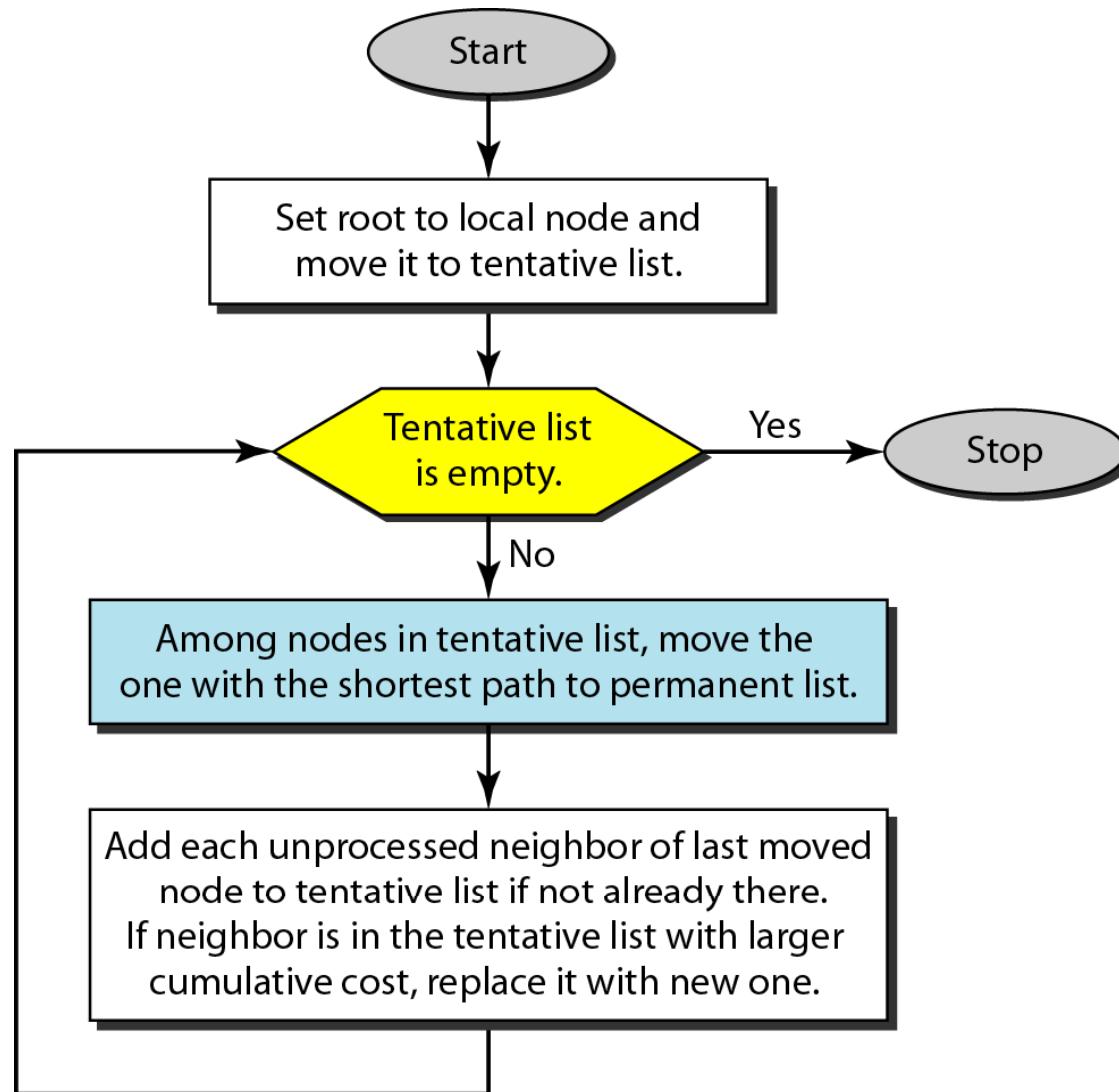


Figure 22.23 Example of formation of shortest path tree

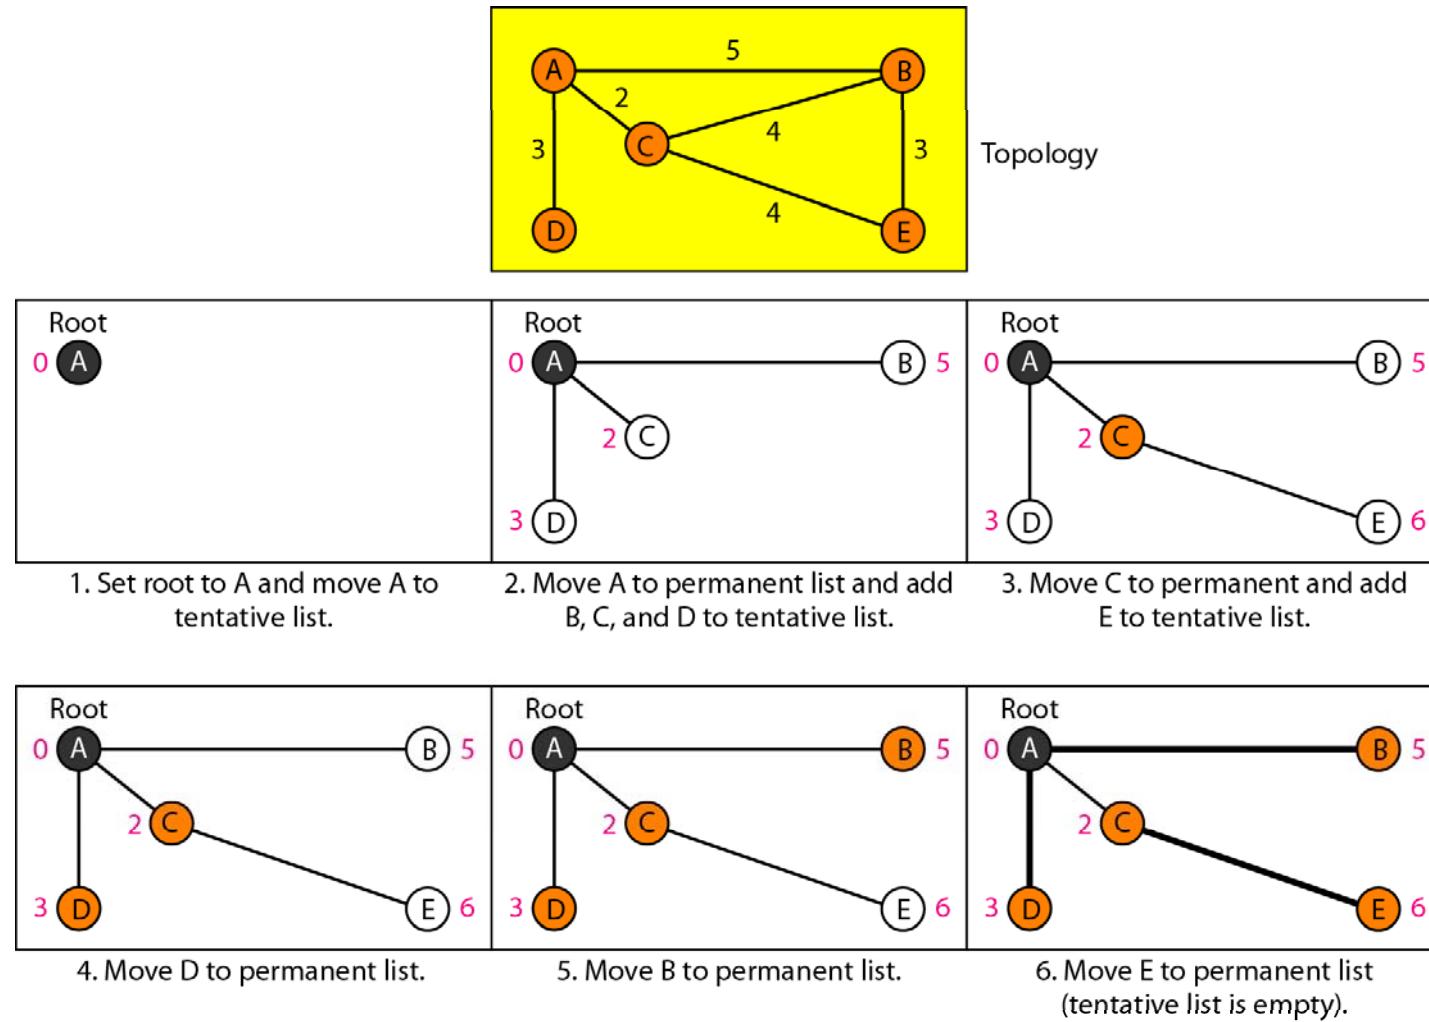


Table 22.2 *Routing table for node A*

<i>Node</i>	<i>Cost</i>	<i>Next Router</i>
A	0	—
B	5	—
C	2	—
D	3	—
E	6	C

Figure 22.24 Areas in an autonomous system



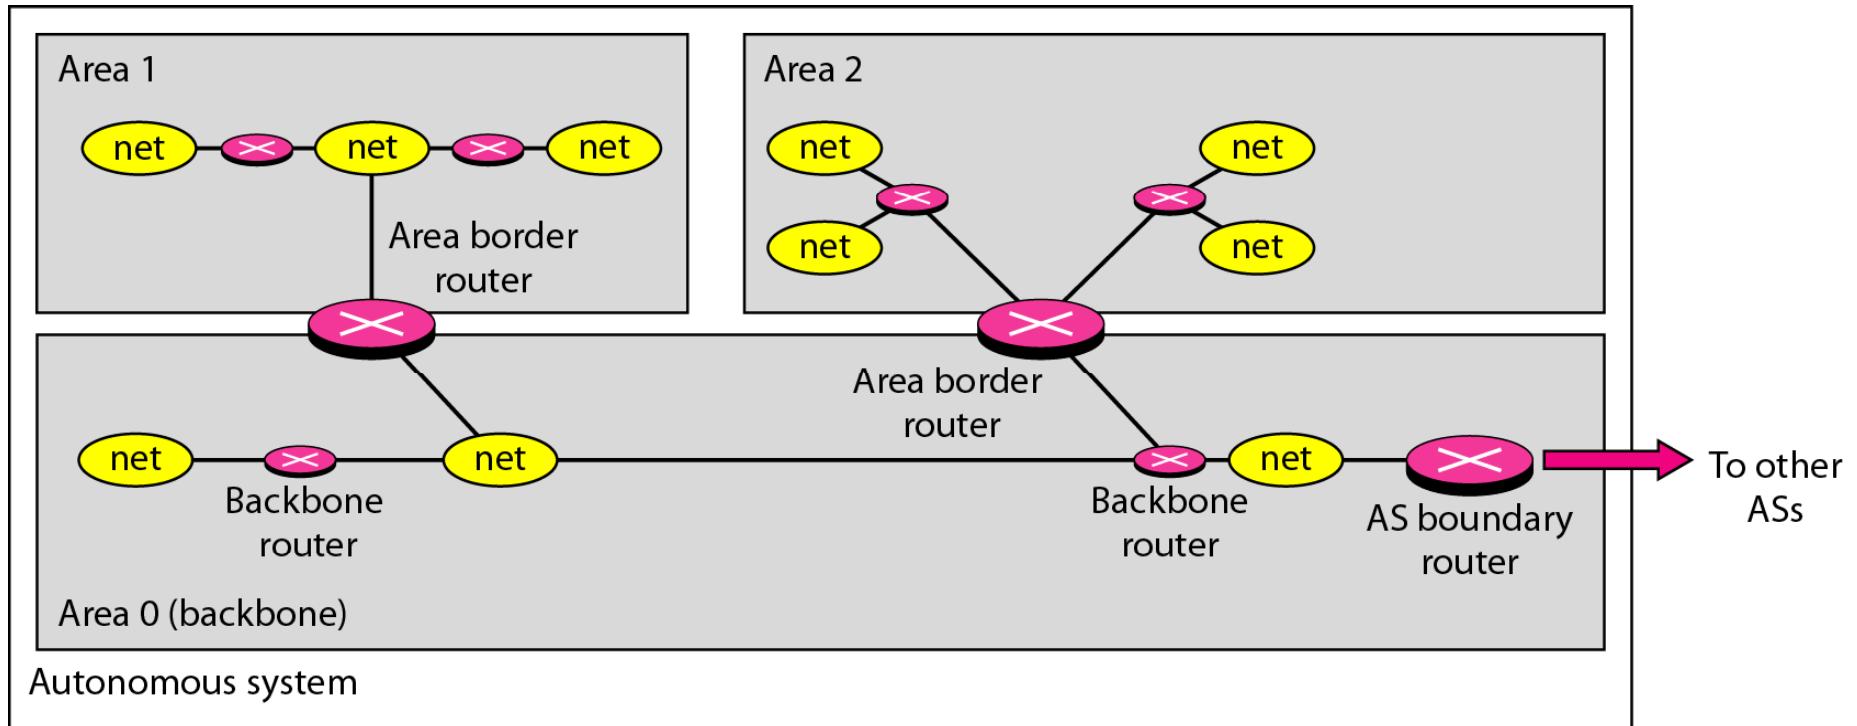


Figure 22.29 Example of an AS and its graphical representation in OSPF

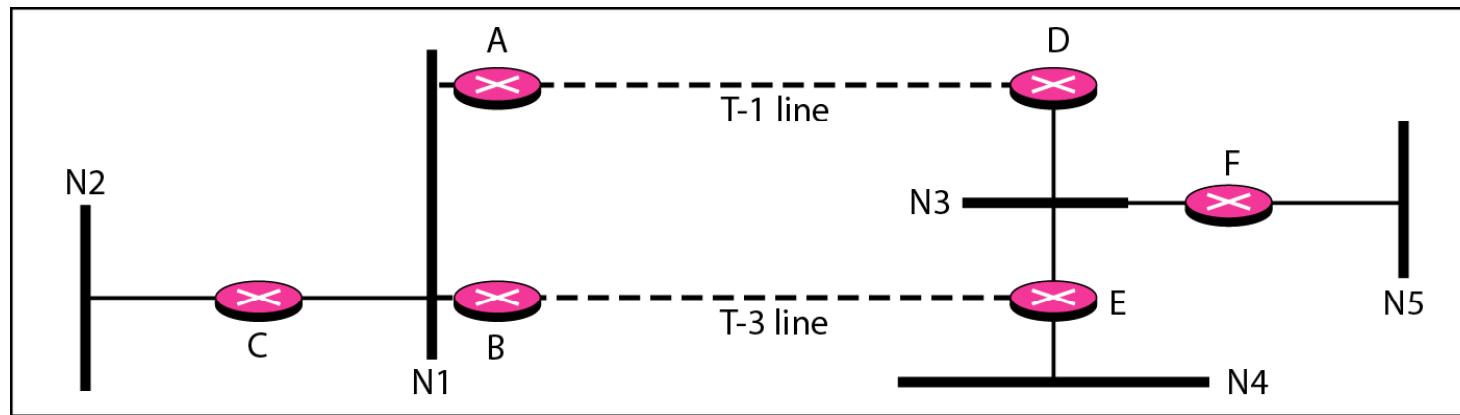

a. Autonomous system

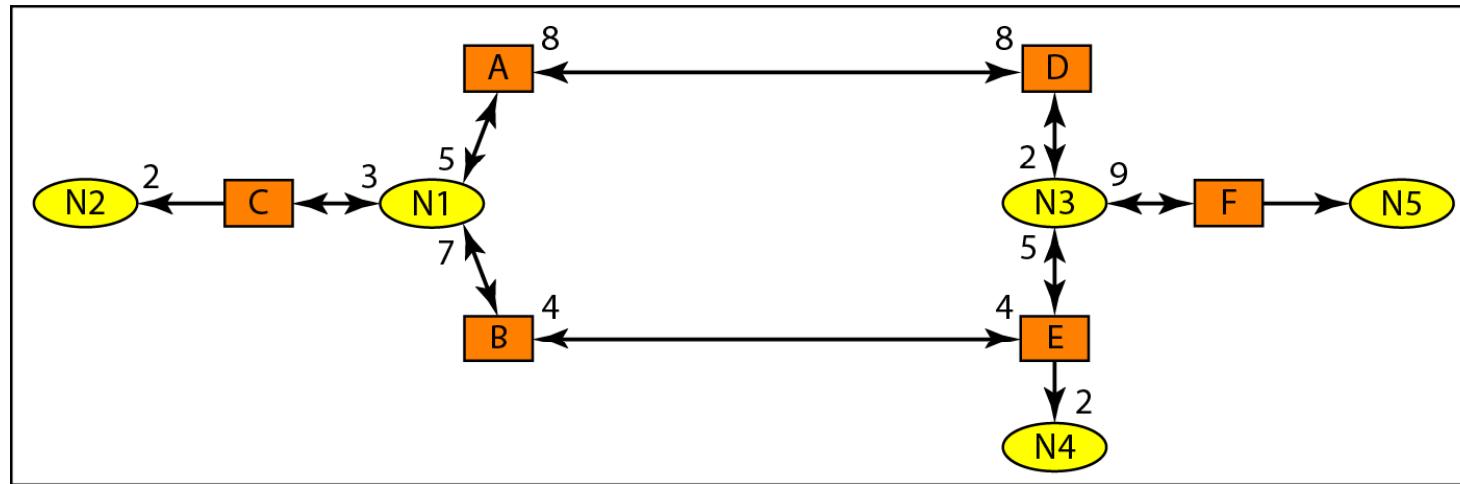

b. Graphical representation

Figure 22.30 Initial routing tables in path vector routing

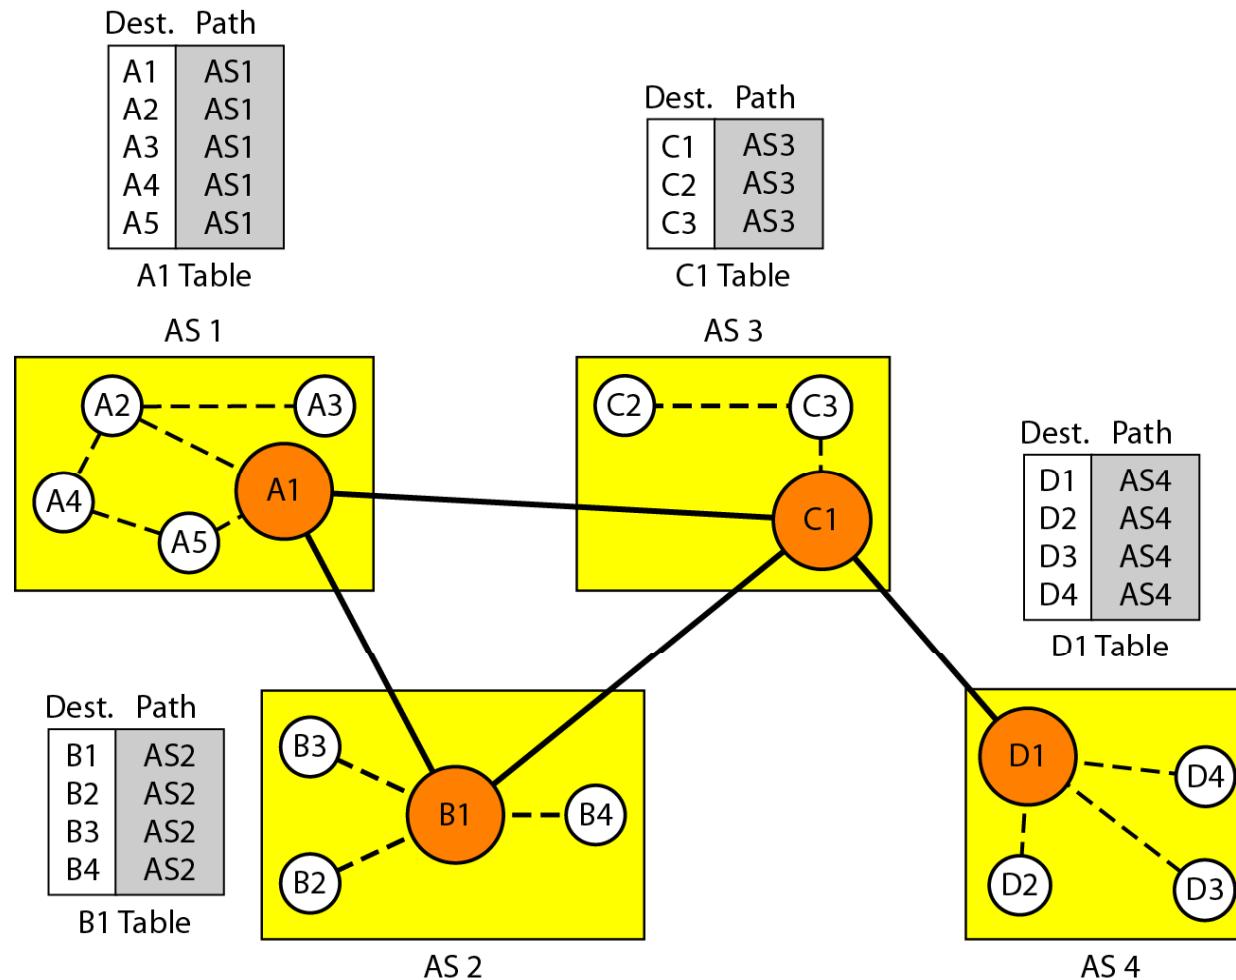


Figure 22.31 *Stabilized tables for three autonomous systems*

Dest.	Path
A1	AS1
...	
A5	AS1
B1	AS1-AS2
...	
B4	AS1-AS2
C1	AS1-AS3
...	
C3	AS1-AS3
D1	AS1-AS2-AS4
...	
D4	AS1-AS2-AS4

A1 Table

Dest.	Path
A1	AS2-AS1
...	
A5	AS2-AS1
B1	AS2
...	
B4	AS2
C1	AS2-AS3
...	
C3	AS2-AS3
D1	AS2-AS3-AS4
...	
D4	AS2-AS3-AS4

B1 Table

Dest.	Path
A1	AS3-AS1
...	
A5	AS3-AS1
B1	AS3-AS2
...	
B4	AS3-AS2
C1	AS3
...	
C3	AS3
D1	AS3-AS4
...	
D4	AS3-AS4

C1 Table

Dest.	Path
A1	AS4-AS3-AS1
...	
A5	AS4-AS3-AS1
B1	AS4-AS3-AS2
...	
B4	AS4-AS3-AS2
C1	AS4-AS3
...	
C3	AS4-AS3
D1	AS4
...	
D4	AS4

D1 Table

Figure 22.32 Internal and external BGP sessions

