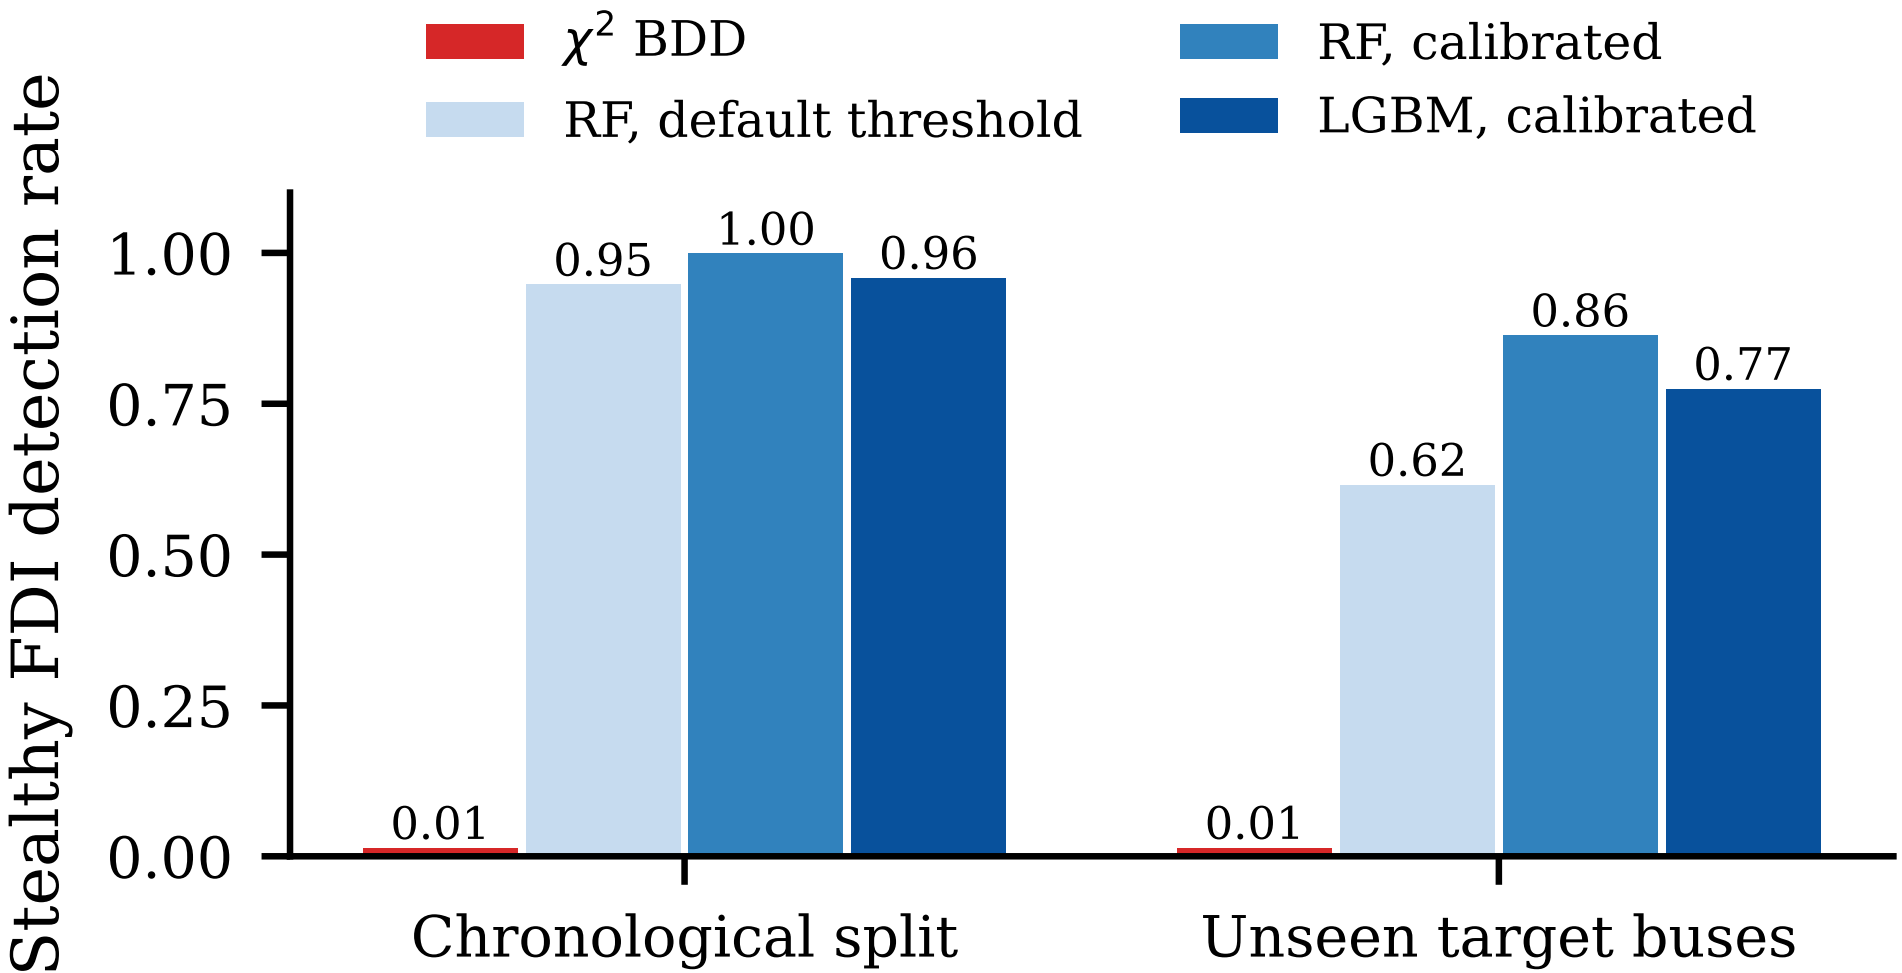
χ^2 BDD
RF, default threshold
RF, calibrated
LGBM, calibrated
Stealthy FDI detection rate
1.00
0.75
0.50
0.25
0.00
0.01
0.95
1.00
0.96
0.01
0.62
0.86
0.77
Chronological split
Unseen target buses