Computer Networks CL3001

| LAB - 10 |
| Subnetting |

Course: Computer Networks (CL3001)   **Semester:** Spring 2025
Instructor: Muhammad Nouman Hanif

Note:
- Maintain discipline during the lab.
- Listen and follow the instructions as they are given.
- Just raise your hand if you have any problem.
- Completing all tasks of each lab is compulsory.
- Get your lab checked at the end of the session.

Lab Objective
- ➢ Introduction to Subnets & Subnetting.
- ➢ Purpose of Subnetting.
- ➢ Subnet tables of different IPv4 classes.
- ➢ Introduction of CIDR.
- ➢ Implementation of Subnetting.
- ➢ Introduction to Routing Protocol & Routed Protocol.
- ➢ Types of Dynamic Routing & its configuration (RIP).

SUBNETTING

1. What is Subnet
A subnet, or subnetwork, is a network inside a network. Subnets make networks more efficient.
Through subnetting, network traffic can travel a shorter distance without passing through unnecessary routers to reach its destination.
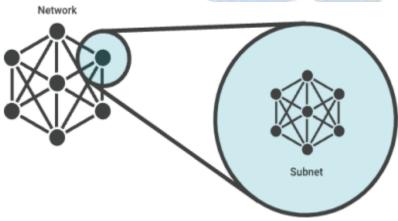

Figure 1

Imagine Imran puts a letter in the mail that is addressed to Asim, who lives in the town right next to him. For the letter to reach Asim as quickly as possible, it should be delivered right from Imran's post office to the post office in Asim's town, and then to Asim. If the letter is first sent to the post office hundreds of miles away, Imran's letter could take a lot longer to reach Asim.

Like the postal service, networks are more efficient when messages travel as directly as possible. When a network receives data packets from another network, it will sort and route those packets by subnet so that the packets do not take an inefficient route to their destination.

2. What is Subnetting

A subnet is just a range of IP addresses. All the devices in the same subnet can communicate directly with one another without going through any routers. In IPv4, a network interface is connected to only one subnet and has only one IP address. In IPv6 things are slightly more complicated, so we'll save IPv6 subnetting for another article. But it's useful to understand IPv4 first because the basic concepts are the same.

My laptop is on a subnet that also includes a server, a printer, a couple of other workstations, and a router. If I want to communicate with another device in my subnet, I can send packets to it directly.
If it's not on my subnet, I need to forward the packet to a router first. That router also needs to be on my subnet. My computer knows that another device is in my subnet by looking at my own IP address and my subnet mask.

Suppose my IP address is 192.168.101.15 and my subnet mask is 255.255.255.0. There are 32 bits in the IP address and the same number in the mask. We always write those 32 bits as four 8-bit numbers, often called octets. The thing that can make it confusing is that we use decimal notation for each of those 8-bit numbers, but the mechanics of subnetting are really going on in binary.

3. Purpose of Subnetting

To subnet a network means to create logical divisions of the network. Subnetting, therefore, involves dividing the network into smaller portions called subnets.
Subnetting applies to IP addresses because this is done by borrowing bits from the host portion of the IP address. In a sense, the IP address then has three components - the network part, the subnet part and, finally, the host part.

We create a subnet by logically grabbing the last bit from the network component of the address and using it to determine the number of subnets required.
In the following example, a Class C address normally has 24 bits for the network address and eight for the host, but we are going to borrow the left-most bit of the host address and declare it as identifying the subnet.

205.112.45.60

11001101.01110000.00101101.00111100

Network
Address

Host
Address

Borrowed bit

Figure 2

If the bit is a 0, then that will be one subnet; if the bit is a 1 that would be the second subnet.
Of course, with only one borrowed bit we can only have two possible subnets. By the same token, that also reduces the number of hosts we can have on the network to 127 (but actually 125 useable addresses given all zeros and all ones are not recommended addresses), down from 255.

So how can you tell how many bits should be borrowed, or, in other words, how many subnets we want to have on our network? The answer is with a subnet mask.

Subnet masks sound a lot scarier than they really are. All that a subnet mask does is indicate how many bits are being "borrowed" from the host component of an IP address.

If you can't remember anything about subnetting, remember this concept. It is the foundation of all subnetting. The reason a subnet mask has this name is that it literally masks out the host bits being borrowed from the host address portion of the IP address.
In the following diagram, there is a subnet mask for a Class C address. The subnet mask is 255.255.255.128 which, when translated into bits, indicates which bits of the host part of the address will be used to determine the subnet number.
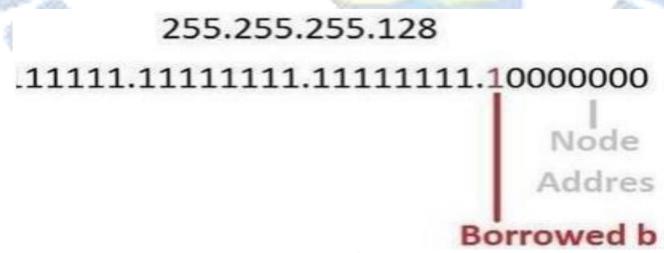
255.255.255.128

.11111.11111111.11111111.10000000

Node
Addres

Borrowed b

Figure 3

More bits borrowed means fewer individually addressable hosts that can be on the network. Sometimes, all the combinations and permutations can be confusing, so here are some tables of subnet possibilities.

4. Subnet Tables of IPV4

In pervious labs we studied the default subnet mask for each class in IPv4.

In this section, we have provided the subnet tables of class A, B & C when we create subnet from these IP address.

Address Class	Value in First Octet	Classful Mask (Dotted Decimal)	Classful Mask (Prefix Notation)
Class A	1 - 126	255.0.0.0	/8
Class B	128 - 191	255.255.0.0	/16
Class C	192 - 223	255.255.255.0	/24
Class D	224 - 239	--	--
Class E	240 - 255	--	--

Table 1

Class A Host/Subnet Table

lass A bits	Subnet Mask	Effective Subnets	Effective Hosts	Number of Subnet Mask bits
1	255.128.0.0	2	8388606	/9
2	255.192.0.0	4	4194302	/10
3	255.224.0.0	8	2097150	/11
4	255.240.0.0	16	1048574	/12
5	255.248.0.0	32	524286	/13
6	255.252.0.0	64	262142	/14
7	255.254.0.0	128	131070	/15
8	255.255.0.0	256	65534	/16
9	255.255.128.0	512	32766	/17
10	255.255.192.0	1024	16382	/18
11	255.255.224.0	2048	8190	/19
12	255.255.240.0	4096	4094	/20
13	255.255.248.0	8192	2046	/21
14	255.255.252.0	16384	1022	/22
15	255.255.254.0	32768	510	/23
16	255.255.255.0	65536	254	/24
17	255.255.255.128	131072	126	/25
18	255.255.255.192	262144	62	/26
19	255.255.255.224	524288	30	/27
20	255.255.255.240	1048576	14	/28
21	255.255.255.248	2097152	6	/29
22	255.255.255.252	4194304	2	/30
23	255.255.255.254	8388608	2	/31

Table 2

Class B Host/Subnet Table

lass B bits	Subnet Mask	Effective Subnets	Effective Hosts	Number of Subnet Mask bits
1	255.255.128.0	2	32766	/17
2	255.255.192.0	4	16382	/18
3	255.255.224.0	8	8190	/19
4	255.255.240.0	16	4094	/20
5	255.255.248.0	32	2046	/21
6	255.255.252.0	64	1022	/22
7	255.255.254.0	128	510	/23
8	255.255.255.0	256	254	/24
9	255.255.255.128	512	126	/25
10	255.255.255.192	1024	62	/26
11	255.255.255.224	2048	30	/27
12	255.255.255.240	4096	14	/28
13	255.255.255.248	8192	6	/29
14	255.255.255.252	16384	2	/30
15	255.255.255.254	32768	2	/31

Table 3

Class C Host/Subnet Table

lass C bits	Subnet Mask	Effective Subnets	Effective Hosts	Number of Subnet Mask bits
1	255.255.255.128	2	126	/25
2	255.255.255.192	4	62	/26
3	255.255.255.224	8	30	/27
4	255.255.255.240	16	14	/28
5	255.255.255.248	32	6	/29
6	255.255.255.252	64	2	/30
7	255.255.255.254	128	2	/31

Table 4

5. CIDR (Classless Internet Domain Routing)

Having spent a whole bunch of time learning about IP addresses and classes, you might be surprised that in reality they are not used anymore other than to understand the basic concepts of IP addressing.

Instead, network administrators use Classless Internet Domain Routing (CIDR), pronounced "cider", to represent IP addresses.

The idea behind CIDR is to adapt the concept of subnetting to the entire Internet. In short, classless addressing means that instead of breaking a particular network into subnets, we can aggregate networks into larger supernets.

CIDR is therefore often referred to as supernetting, where the principles of subnetting are applied to larger networks. CIDR is written out in a network/mask format, where the mask is tacked onto the network address in the form of the number of bits used in the mask. An example would be 205.112.45.60/25.

What is most important to understand about the CIDR method of subnetting is the use the network prefix (the /25 of 205.112.45.60/25), rather than the classful way of using the first three bits of the IP address to determine the dividing point between the network number and the host number.

The process for understanding what this mean is:
1. The "205" in the first octet means this IP address would normally contain 24 bits to represent the network portion of the address. With eight bits to an octet, the arithmetic is 3 x 8 = 24, or looking at it the other way around, "/24" means no bits are being borrowed from the last octet.
2. But this is "/25," which indicates it is "borrowing" one bit from the host portion of the address.
3. With only one bit, there can only be two unique subnets.
4. So, this is the equivalent of a net mask of 255.255.255.128, where there is a maximum of 126 host addresses addressable on each of the two subnets.

So why did CIDR become so popular? Because it's a much more efficient allocator of the IP address space. Using CIDR, a network admin can carve out a number of host addresses that's closer to what is required than with the class approach.

For example, say a network admin has an IP address of 207.0.64.0/18 to work with. This block consists of 16,384 IP addresses. But if only 900 host addresses are required, this wastes scarce resources, leaving 15,484 (16,384 – 900) addresses unused.
By using a subnet CIDR of 207.0.68.0/22 though, the network would address 1,024 nodes, which is much closer to the 900 host addresses required.

CIDR Address Blocks

CIDR Prefix	Dotted Decimal Notation	# Node Addresses	# of Traditional Class Networks
/13	255.248.0.0	512K	8 B or 2048 C class
/14	255.252.0.0	256K	4 B or 1024 C class
/15	255.254.0.0	128K	2 B or 512 C class
/16	255.255.0.0	64K	1 B or 256 C class
/17	255.255.128.0	32K	128 C class
/18	255.255.192.0	16K	64 C class
/19	255.255.224.0	8K	32 C class
/20	255.255.240.0	4K	16 C class
/21	255.255.248.0	2K	8 C class
/22	255.255.252.0	1K	4 C class
/23	255.255.254.0	512	2 C class
/24	255.255.255.0	256	1 C class
/25	255.255.255.128	128	1/2 C class
/26	255.255.255.192	64	1/4 C class
/27	255.255.255.224	32	1/8 C class

Table 5

6. Implementation of Subnetting on Cisco Packet Tracer

Consider an IP of Class C **192.168.1.0/27**, using this IP address calculate the subnets and implement the scenario in Cisco Packet Tracer.
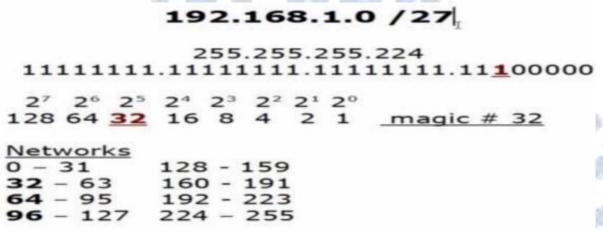

192.168.1.0 /27

255.255.255.224
11111111.11111111.11111111.11100000

| 2^7 | 2^6 | 2^5 | 2^4 | 2^3 | 2^2 | 2^1 | 2^0 | |
| 128 | 64 | **32** | 16 | 8 | 4 | 2 | 1 | magic # 32 |

Networks
0 – 31   128 – 159
32 – 63   160 – 191
64 – 95   192 – 223
96 – 127   224 – 255

Figure 4

Calculations

From above, we have:
Possible Subnets: $2^n = 2^3 = 8$
Possible Hosts = 32

The notation "2^n" refers to the formula used to calculate the number of possible subnets in a network, where "n" is the number of subnet bits. In this case, you have 2^3 (2 raised to the power of 3) because there are 3 subnet bits, which equals 8 possible subnets.

The term "Possible Hosts = 32" indicates the number of hosts that can be accommodated in each subnet. Since there are 5 host bits ($2^5 = 32$), each subnet can have up to 32 hosts.

Note: 1st address of every subnet shows network address and last address shows Broadcast address. e.g., 0,32,64 & 96 represent Network address where 31,63,95 &127 represent Broadcast address.

Custom Subnet Mask = 255.255.255.224

Now let`s implement below topology scenario on Cisco packet Tracer.

192.168.1.**32** /27   192.168.1.**64** /27   192.168.1.**96** /27

192.168.1.**34**   192.168.1.**65**   192.168.1.**98**
      192.168.1.**33**   192.168.1.**66**   192.168.1.**97**

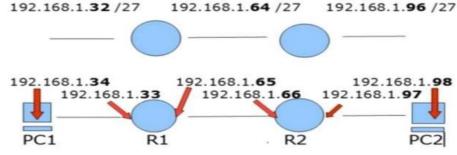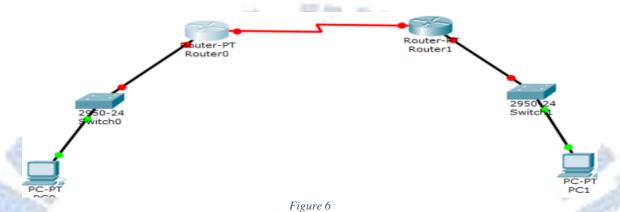PC1   R1   R2   PC2

Figure 5

We have taken two routers R1 & R2 and connected their Fast Ethernet interface Fa 0/0 with the switch. While routers connected with their serial interface 2/0.
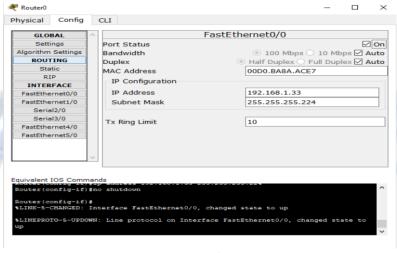

Figure 6

Now configuring PC0:

Figure 7

Now configure the Interface FastEthernet0/0 of Router R0:

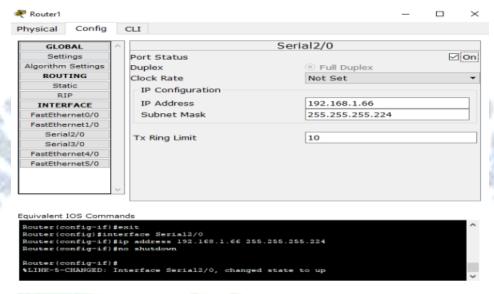*Figure 8*

Configure the Interface Serial2/0 of Router R1:
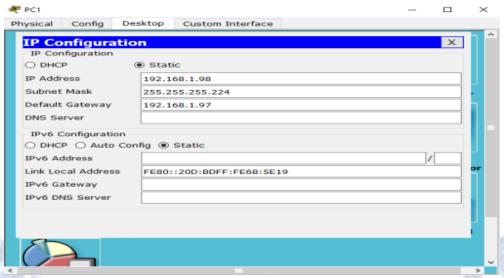

Figure 9

Now configuring PC1:

Figure 10

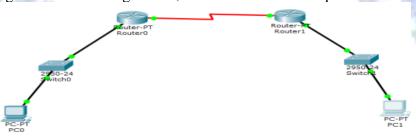Now we have gone through the entire configuration, all the interfaces are up:

Figure 11

Now let start the pinging the interfaces from PC0.
As we ping 192.168.1.33 and 192.168.1.65, we got the reply because these interfaces are directly connected to Router R0.
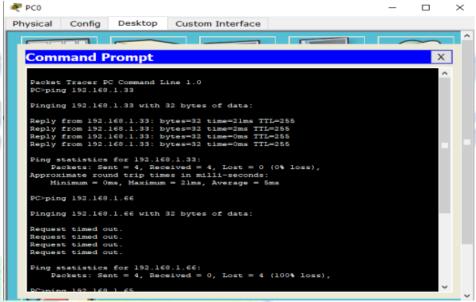

Figure 12

But when we ping 192.168.1.66, we got the Timed out because these interfaces are not directly connected to Router R1 as shown:
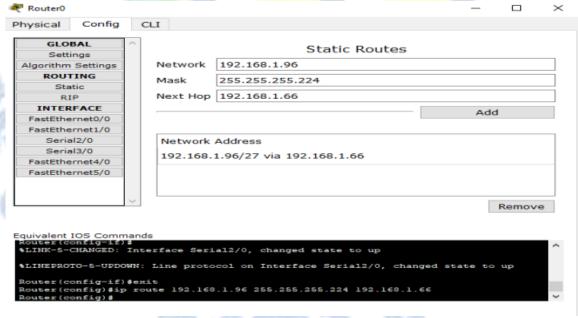Therefore, we have to add static route in Router R0.

Figure 13
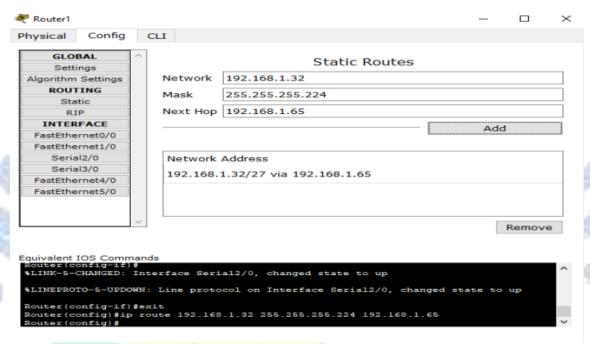
Therefore, we have to add static route in Router R1.

Figure 14

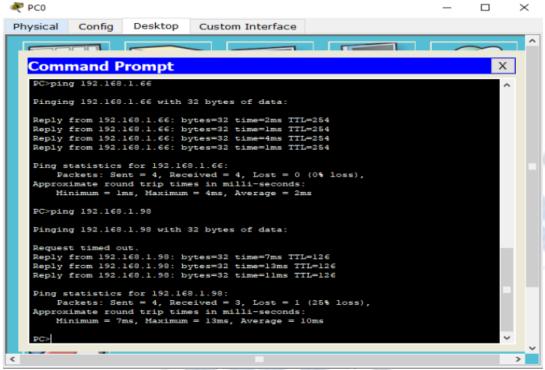As you can see that we got the reply after adding the static route in Routers R0 & R1:

Figure 15

Now using show ip route command we can see all the details of routing table saved in R0:

Figure 16