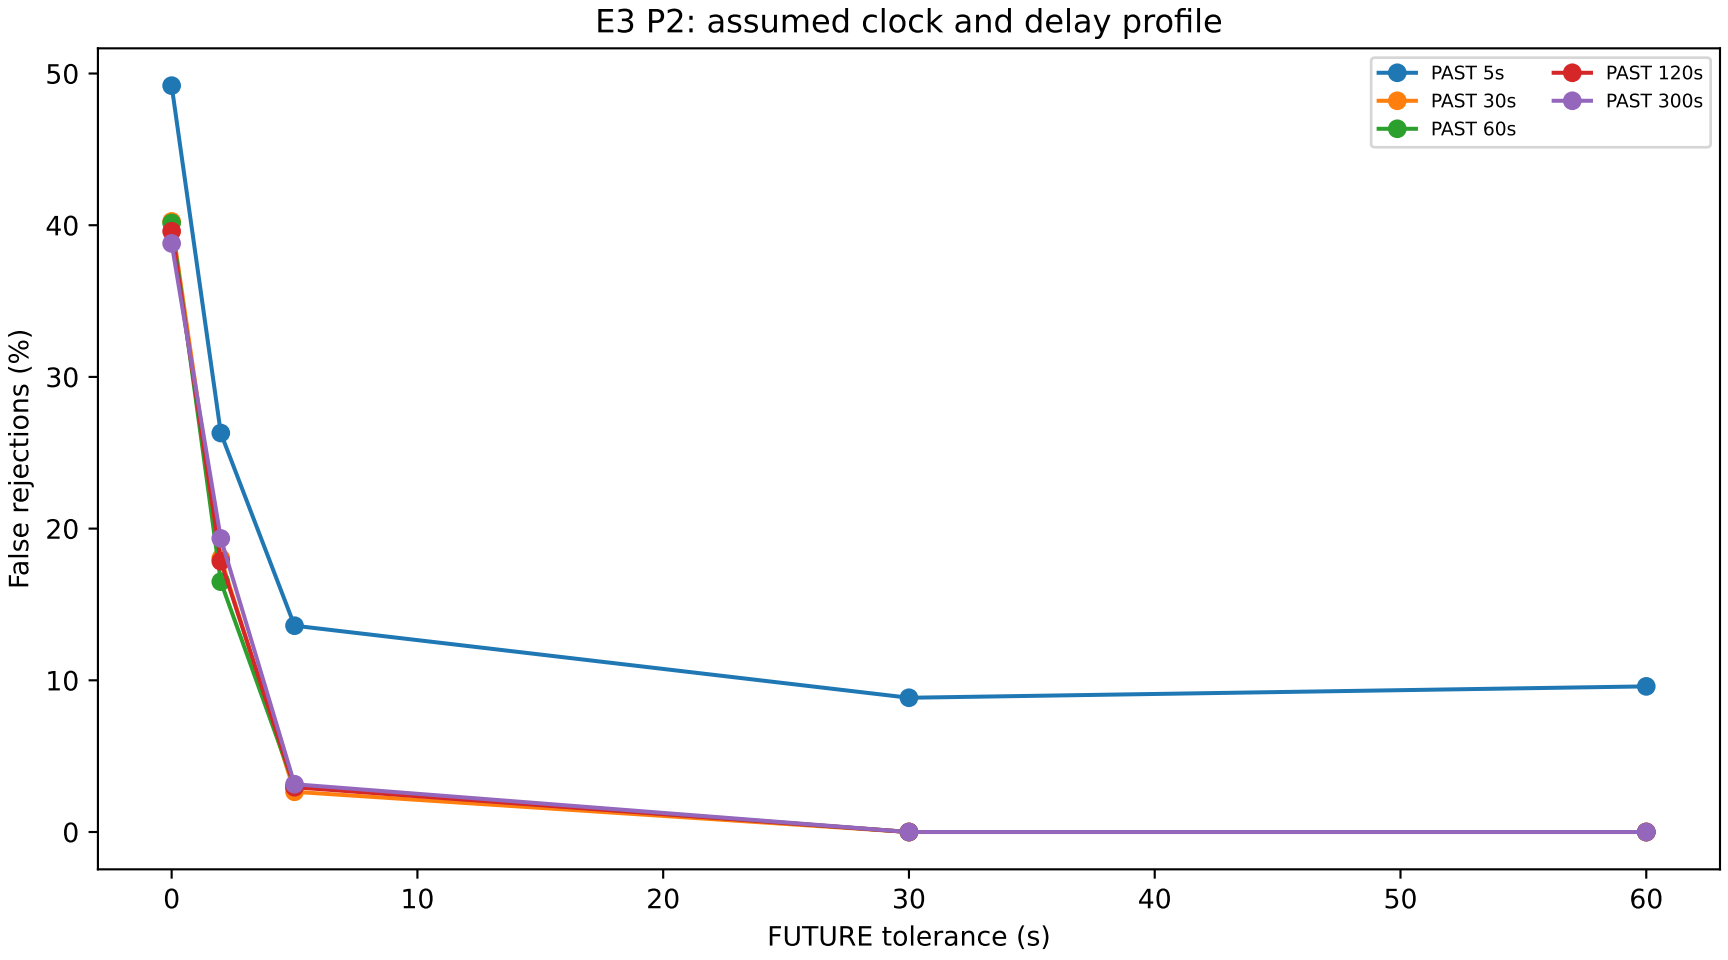
E3 P2: assumed clock and delay profile
PAST 5s
PAST 30s
PAST 60s
PAST 120s
PAST 300s
False rejections (%)
FUTURE tolerance (s)
0
10
20
30
40
50
60