FALCUTÉ DES SCIENCES ET TECHNOLOGIES

(FST)

TROISIÈME ANNÉE L3

Rapport de Laboratoire 3

Cours :Réseaux 1

Nom et Prénom : St Juste Rood Shaïna

Professeur : Ismaël SAINT AMOUR

29 OCTOBRE 2026

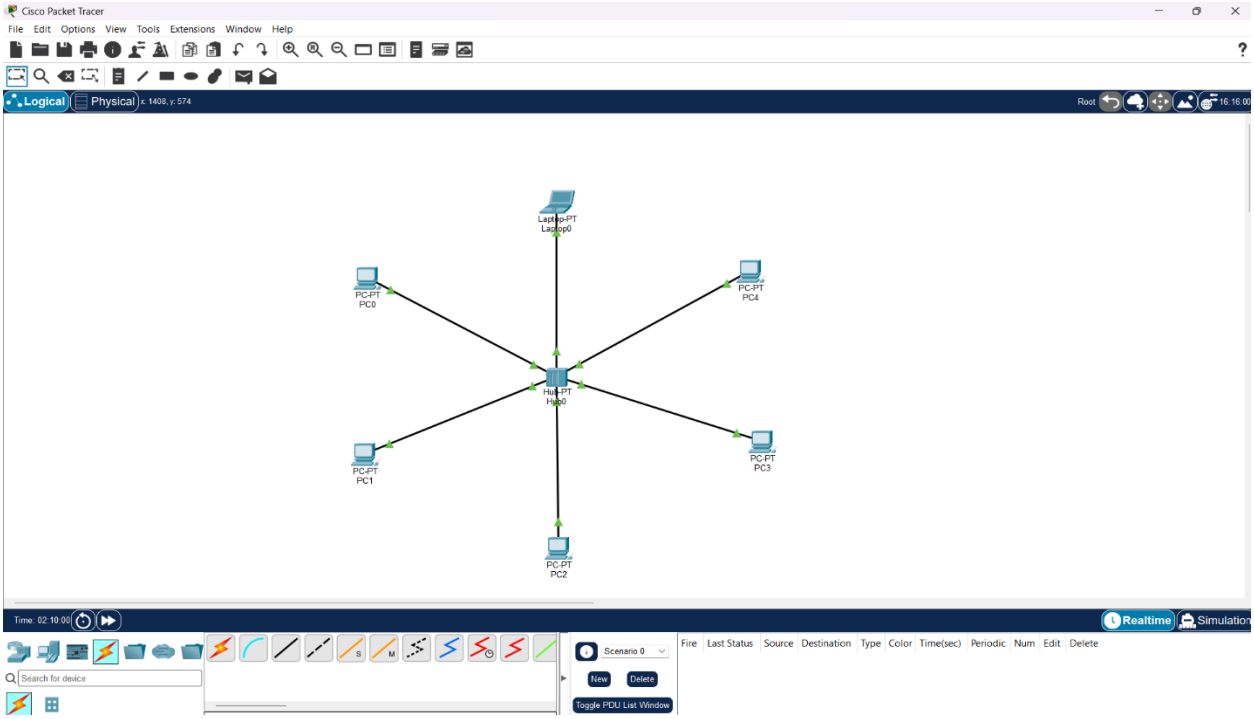
L’objectif de ce TD est de :

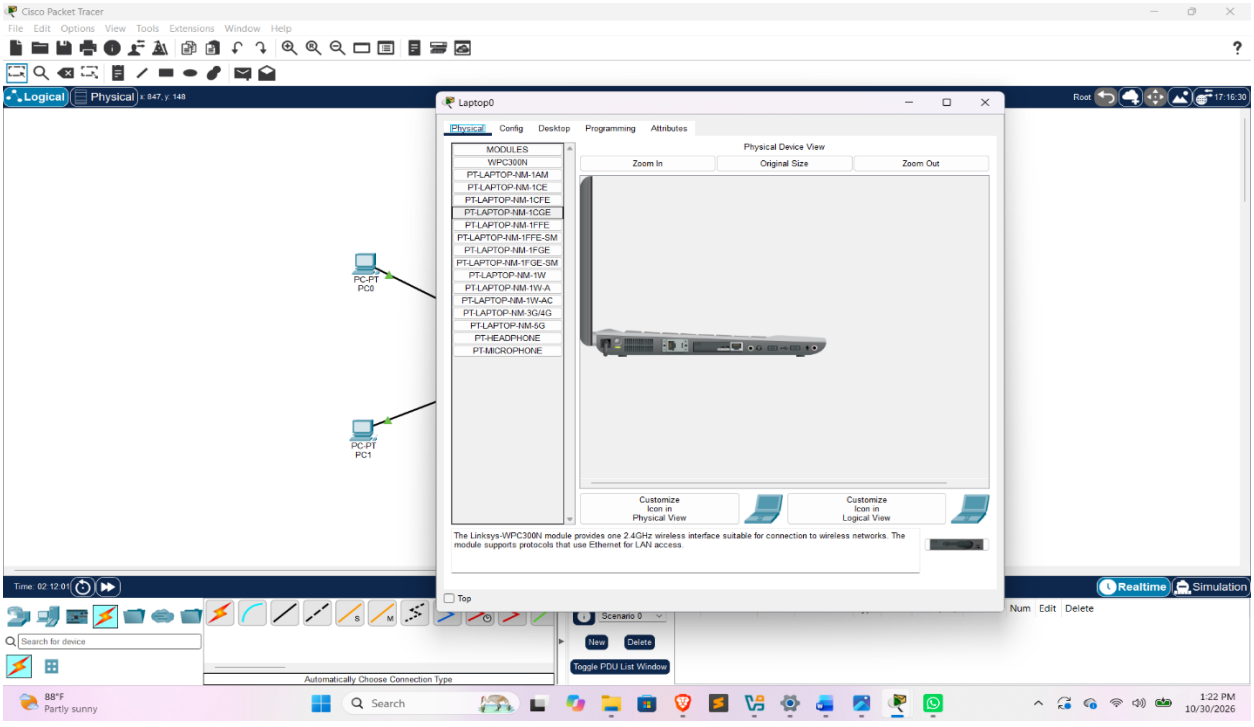
L'objectif de ce TD est de comprendre et de pratiquer la configuration des adresses IPv4 et IPv6 dans Cisco Packet Tracer. Nous avons réalisé différentes topologies réseau, attribué des adresses IP aux équipements et vérifié leur connectivité à l'aide de la commande ping.

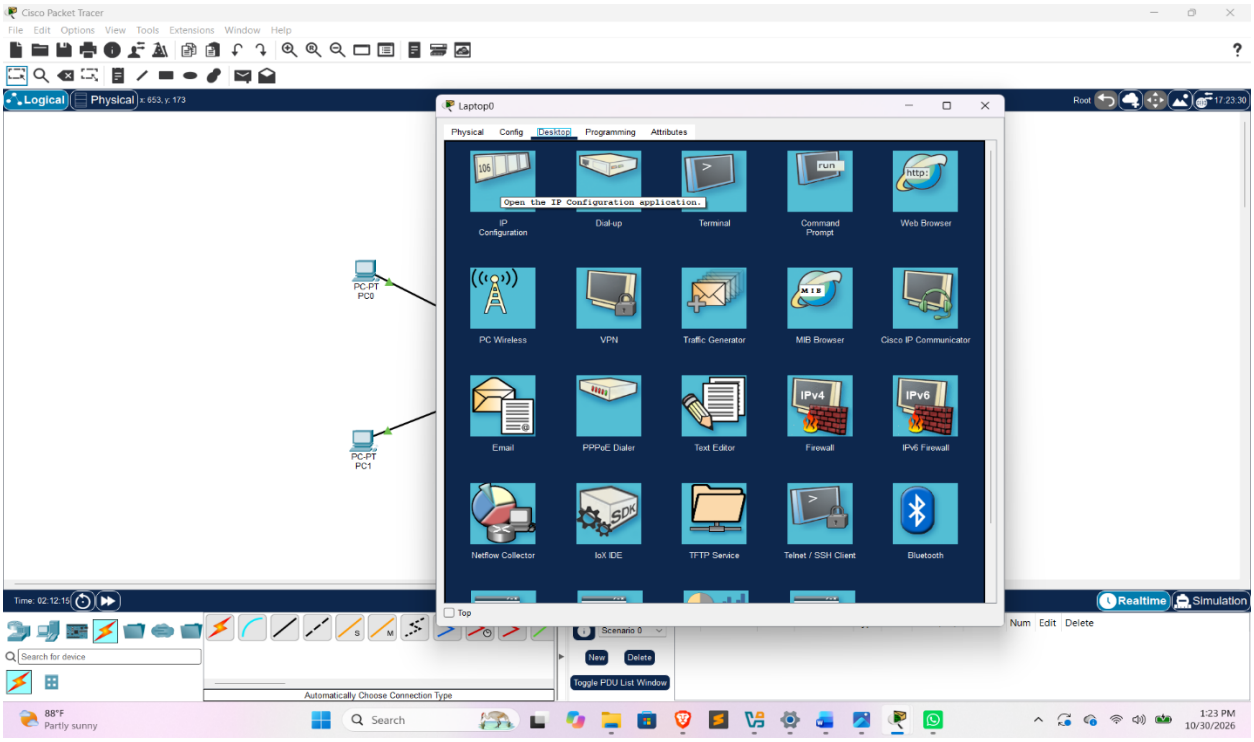
Démarche suivie

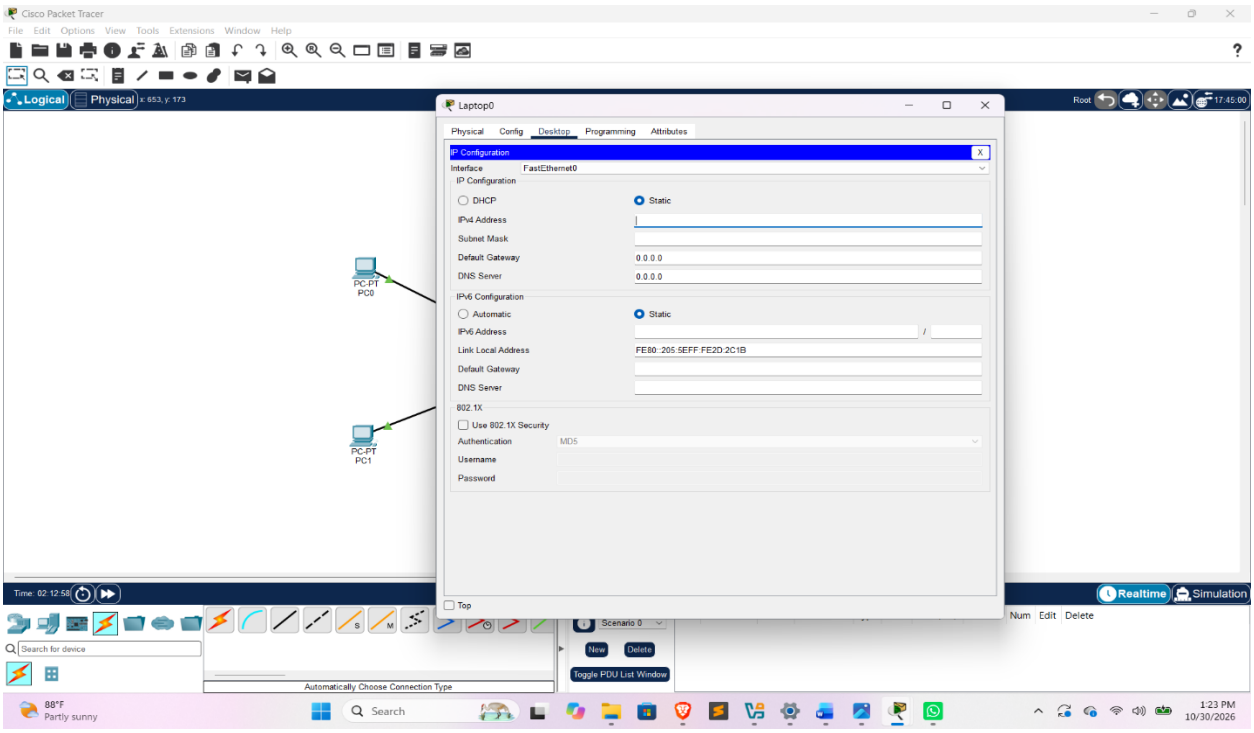
- Les configurations IPv4.
- Les configurations IPv6.
- Les tests de connectivité.

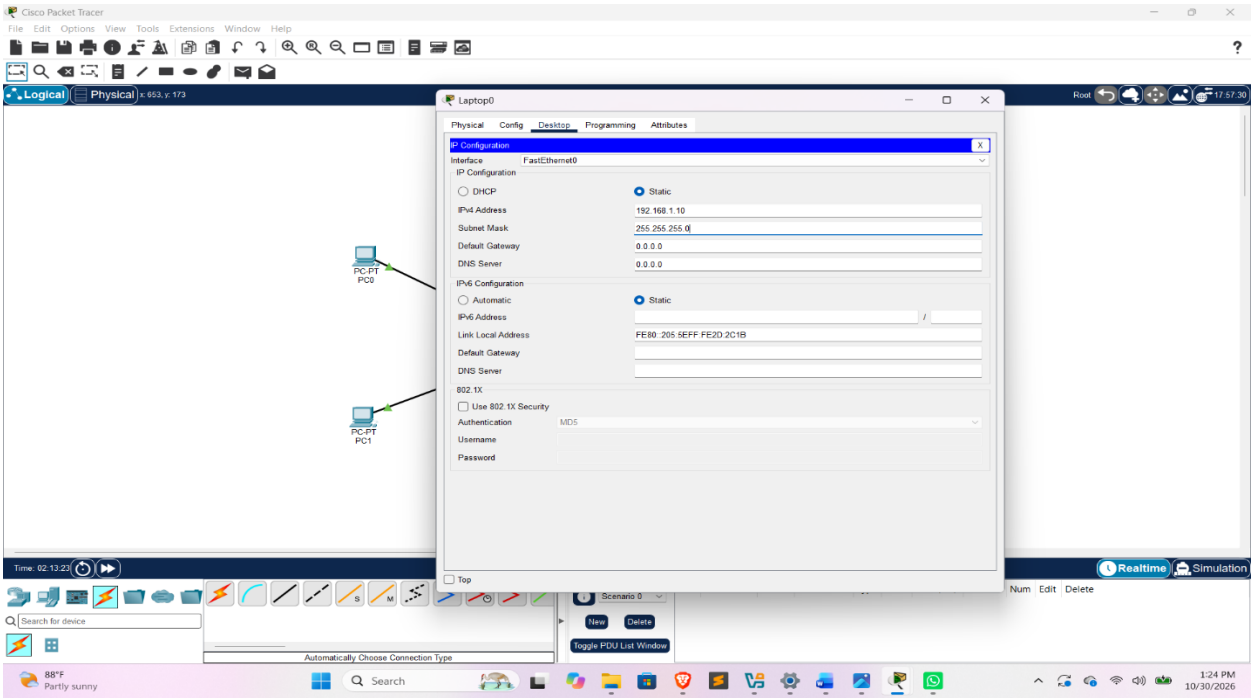
Question 1


Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
Laptop-PT Laptop0
PC-PT PC0
PC-PT PC4
Hub-PT Hub0
PC-PT PC1
PC-PT PC3
PC-PT PC2
Realtime Simulation
Scenario 0
New Delete
Toggle PDU List Window
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete

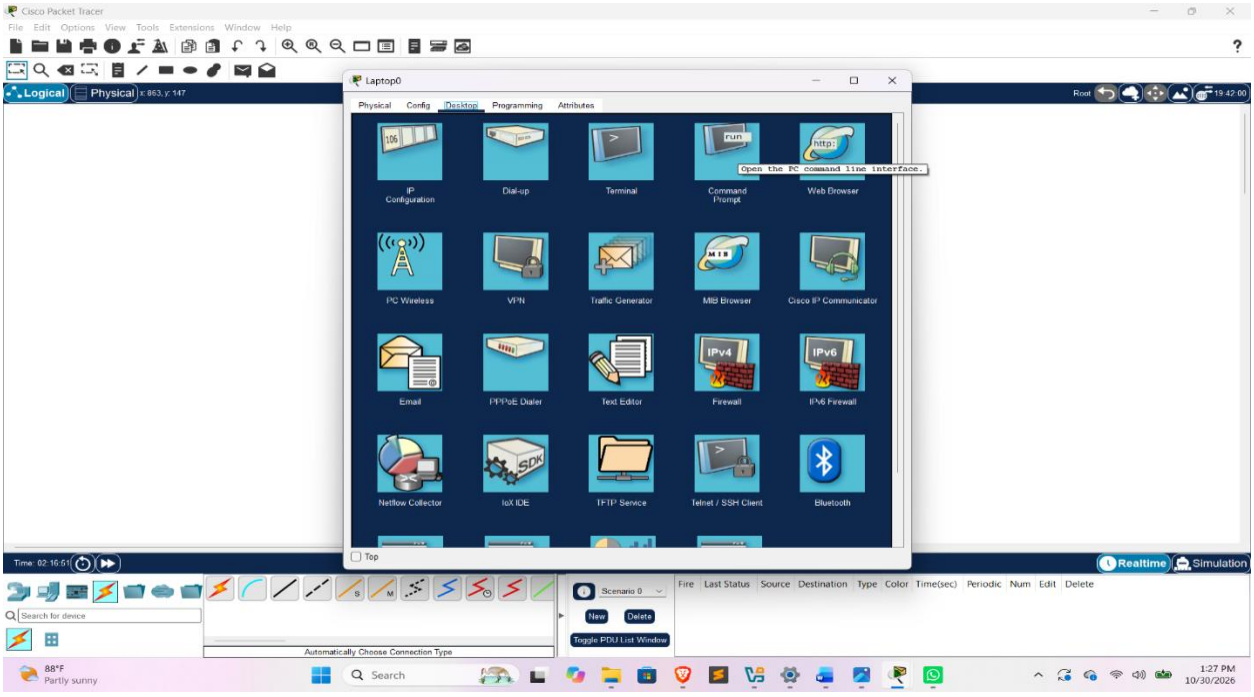

Cisco Packet Tracer
Logical Physical
Laptop0
Physical Config Desktop Programming Attributes
MODULES
WPC300N
PT-LAPTOP-NM-1AM
PT-LAPTOP-NM-1CE
PT-LAPTOP-NM-1CFE
PT-LAPTOP-NM-1CGE
PT-LAPTOP-NM-1FFE
PT-LAPTOP-NM-1FFE-SM
PT-LAPTOP-NM-1FGE
PT-LAPTOP-NM-1FGE-SM
PT-LAPTOP-NM-1W
PT-LAPTOP-NM-1W-A
PT-LAPTOP-NM-1W-AC
PT-LAPTOP-NM-3G/4G
PT-LAPTOP-NM-5G
PT-HEADPHONE
PT-MICROPHONE
Physical Device View
Zoom In Original Size Zoom Out
Customize Icon in Physical View
Customize Icon in Logical View
The Linksys-WPC300N module provides one 2.4GHz wireless interface suitable for connection to wireless networks. The module supports protocols that use Ethernet for LAN access.
Top
PC-PT PC0
PC-PT PC1
Realtime Simulation
Automatically Choose Connection Type
88°F Partly sunny
Search
1:22 PM 10/30/2026

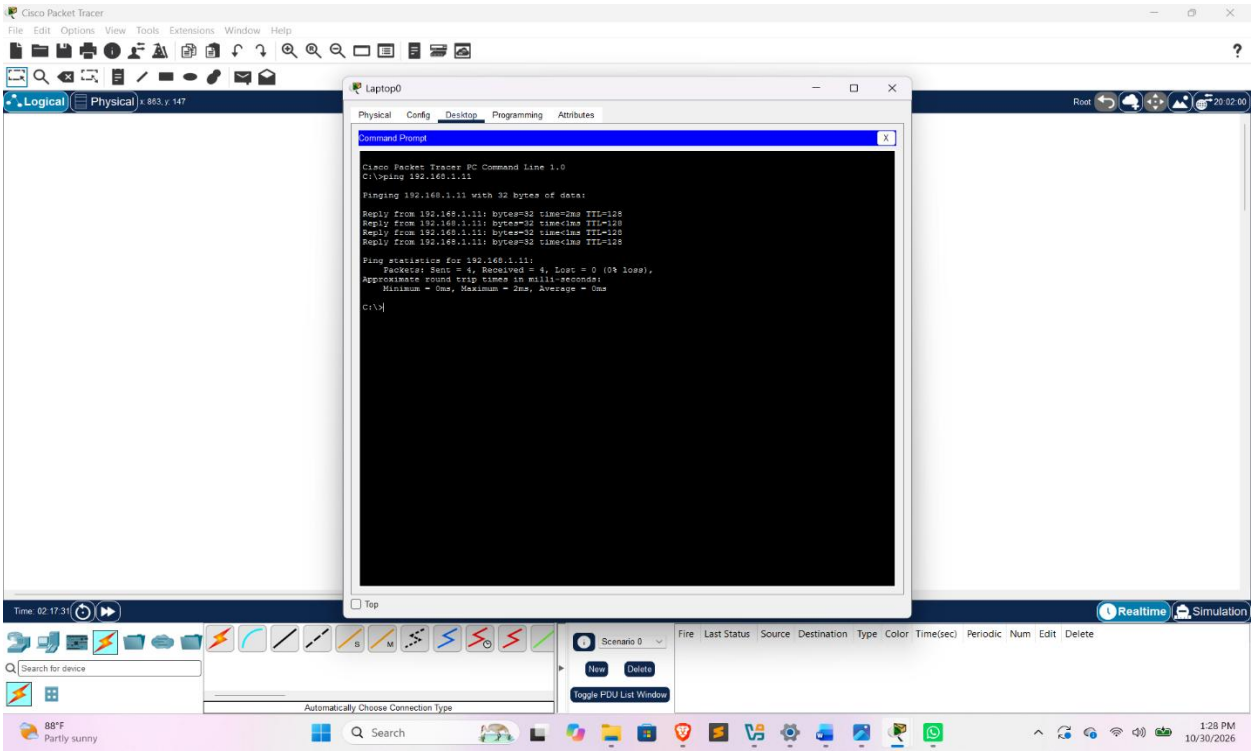

Cisco Packet Tracer
Laptop0
Physical
Config
Desktop
Programming
Attributes
Open the IP Configuration application.
IP Configuration
Dial-up
Terminal
Command Prompt
Web Browser
PC Wireless
VPN
Traffic Generator
MIB Browser
Cisco IP Communicator
Email
PPPoE Dialer
Text Editor
Firewall
IPv6 Firewall
Netflow Collector
IoX IDE
TFTP Service
Telnet / SSH Client
Bluetooth
PC-PT PC0
PC-PT PC1
Realtime
Simulation


Cisco Packet Tracer
Laptop0
Physical
Config
Desktop
Programming
Attributes
IP Configuration
Interface
FastEthernet0
DHCP
Static
IPv4 Address
Subnet Mask
Default Gateway
DNS Server
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address
FE80::205:5EFF:FE2D:2C1B
802.1X
Use 802.1X Security
Authentication
Username
Password
PC-PT PC0
PC-PT PC1
Realtime
Simulation

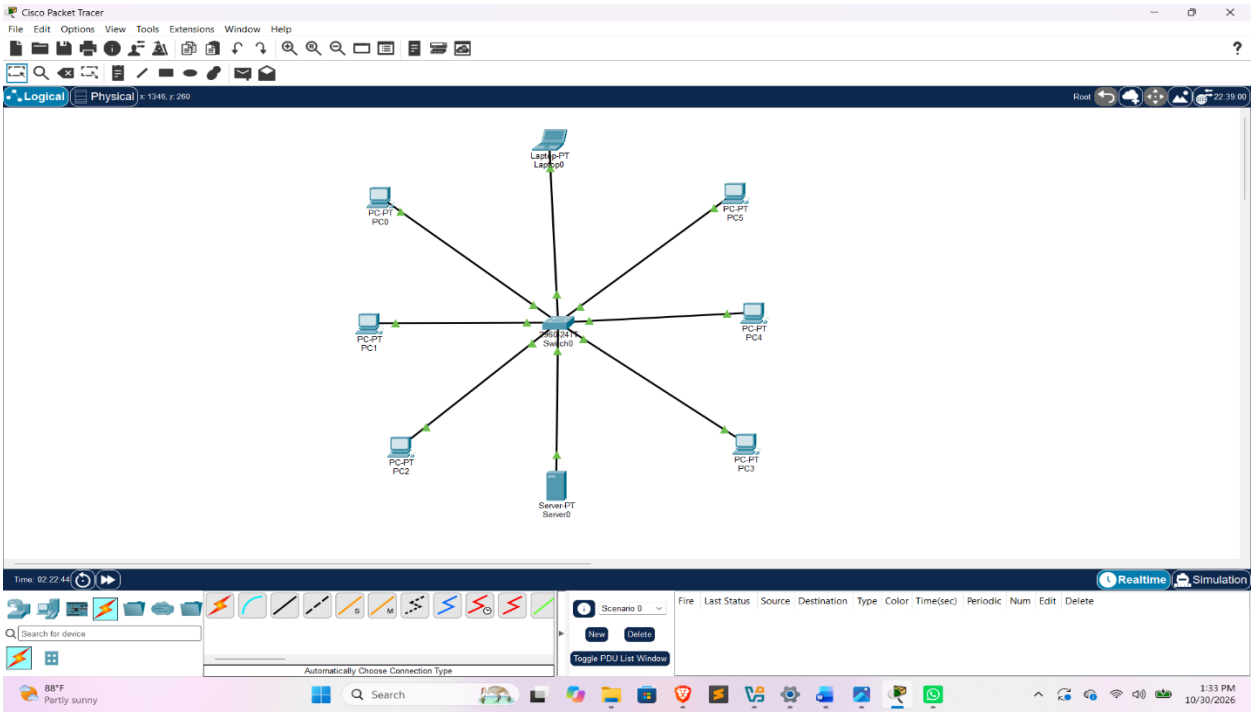


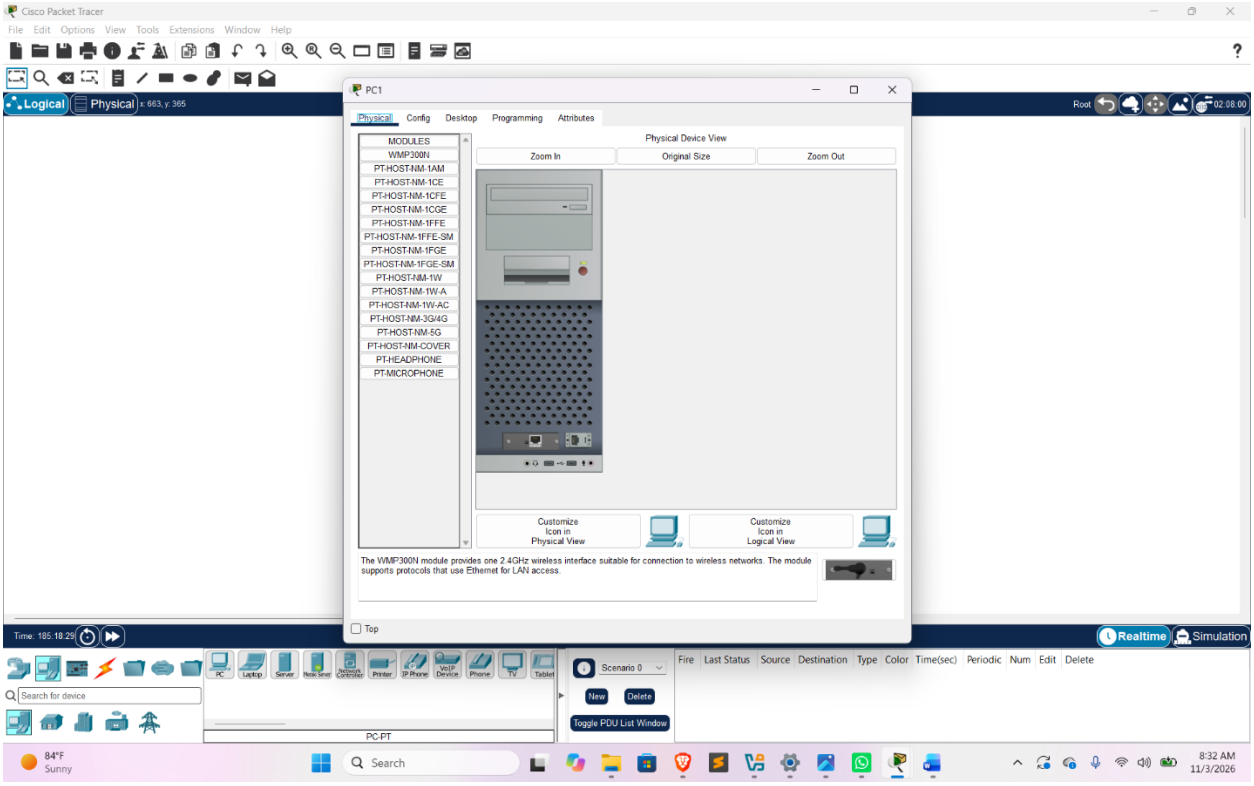
Vérification de la connection

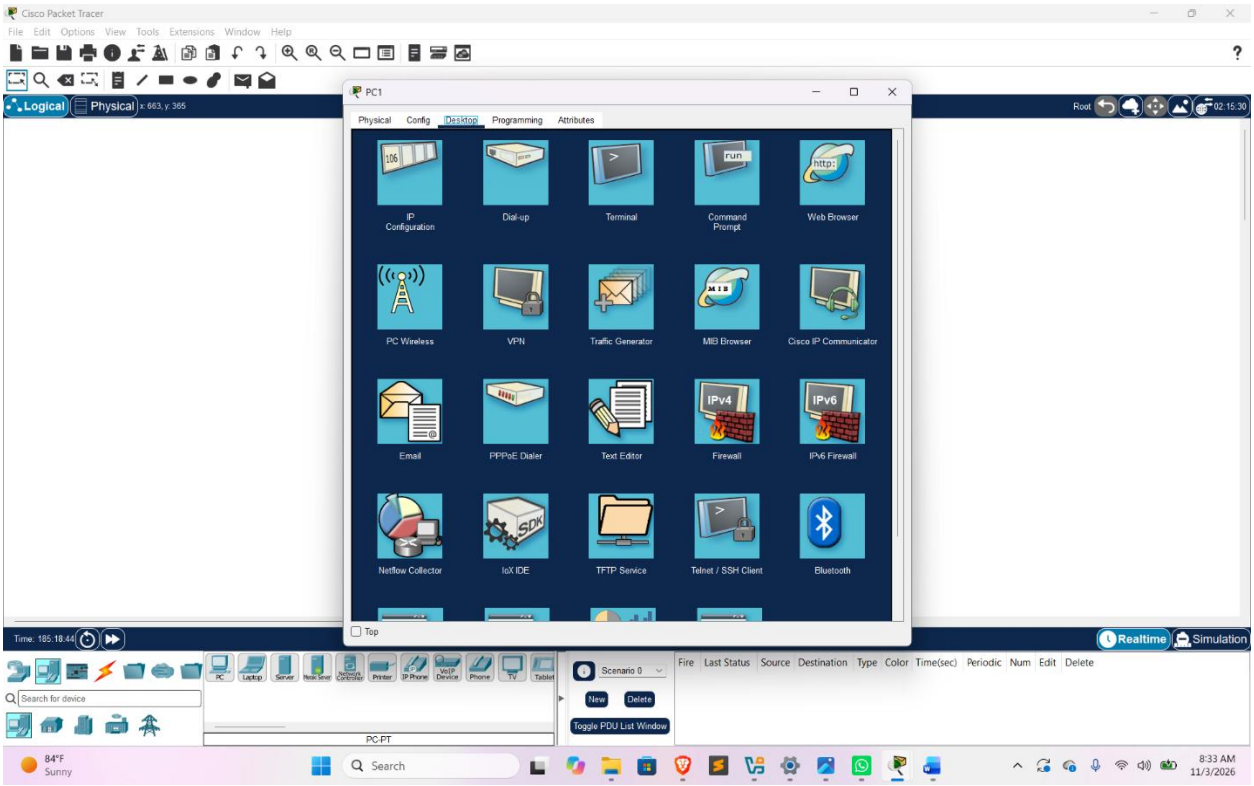


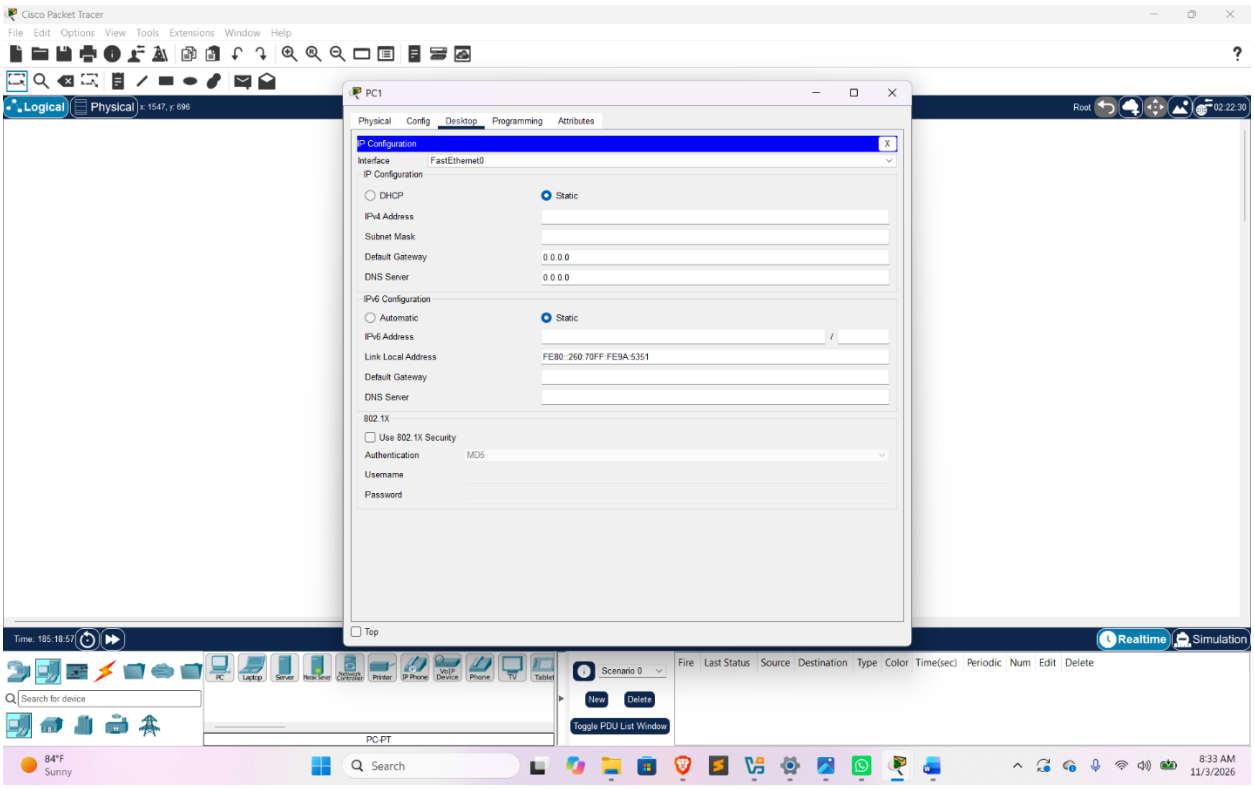

Cisco Packet Tracer
Laptop0
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.11
Pinging 192.168.1.11 with 32 bytes of data:
Reply from 192.168.1.11: bytes=32 time=2ms TTL=128
Reply from 192.168.1.11: bytes=32 time<1ms TTL=128
Reply from 192.168.1.11: bytes=32 time<1ms TTL=128
Reply from 192.168.1.11: bytes=32 time<1ms TTL=128
Ping statistics for 192.168.1.11:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 2ms, Average = 0ms
C:\>
Top
Logical
Physical
Realtime
Simulation
Automatically Choose Connection Type
Scenario 0
New
Delete
Toggle PDU List Window
Fire
Last Status
Source
Destination
Type
Color
Time(sec)
Periodic
Num
Edit
Delete
88°F
Partly sunny
Search
1:28 PM
10/30/2026

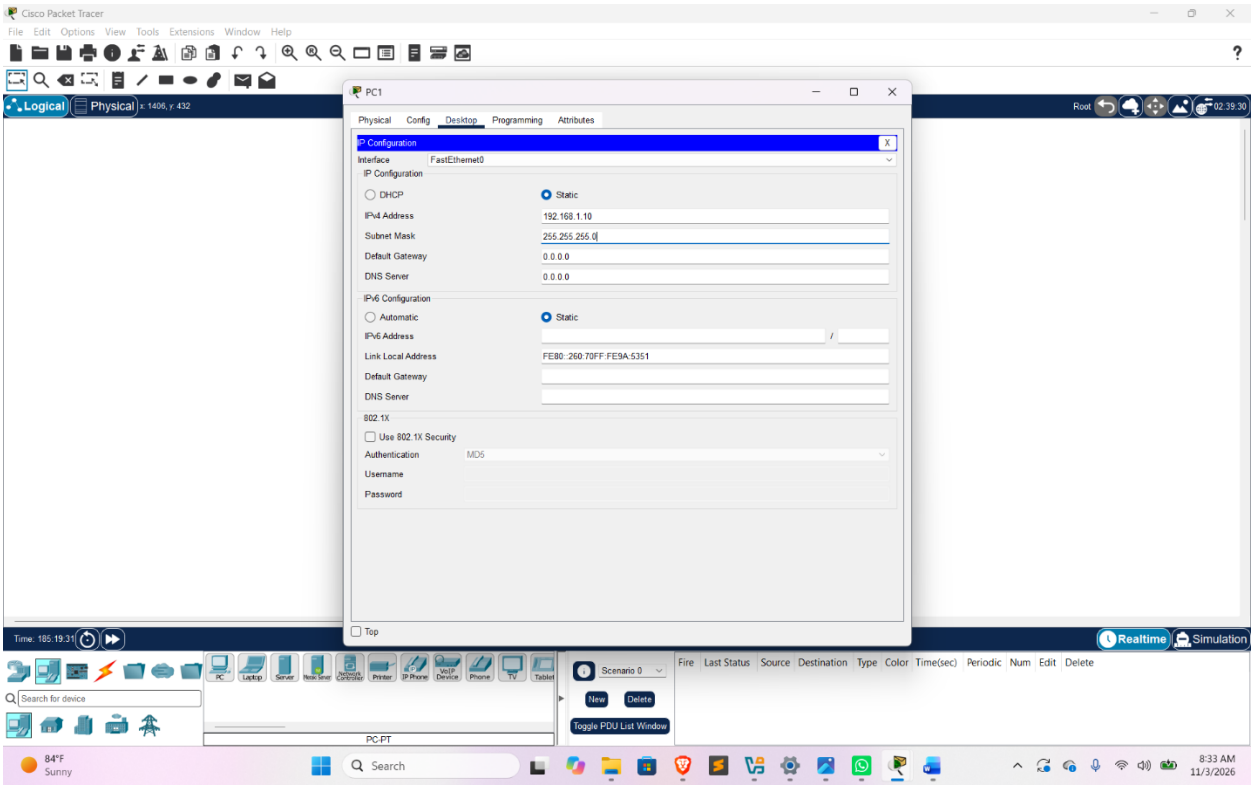
Question 2


Cisco Packet Tracer
Logical
Physical
Laptop-PT
Laptop0
PC-PT
PC0
PC-PT
PC5
PC-PT
PC1
PC-PT
PC4
PC-PT
PC2
PC-PT
PC3
Server-PT
Server0
Realtime
Simulation
Automatically Choose Connection Type
Scenario 0
New
Delete
Toggle PDU List Window
Fire
Last Status
Source
Destination
Type
Color
Time(sec)
Periodic
Num
Edit
Delete
88°F
Partly sunny
Search
1:33 PM
10/30/2026

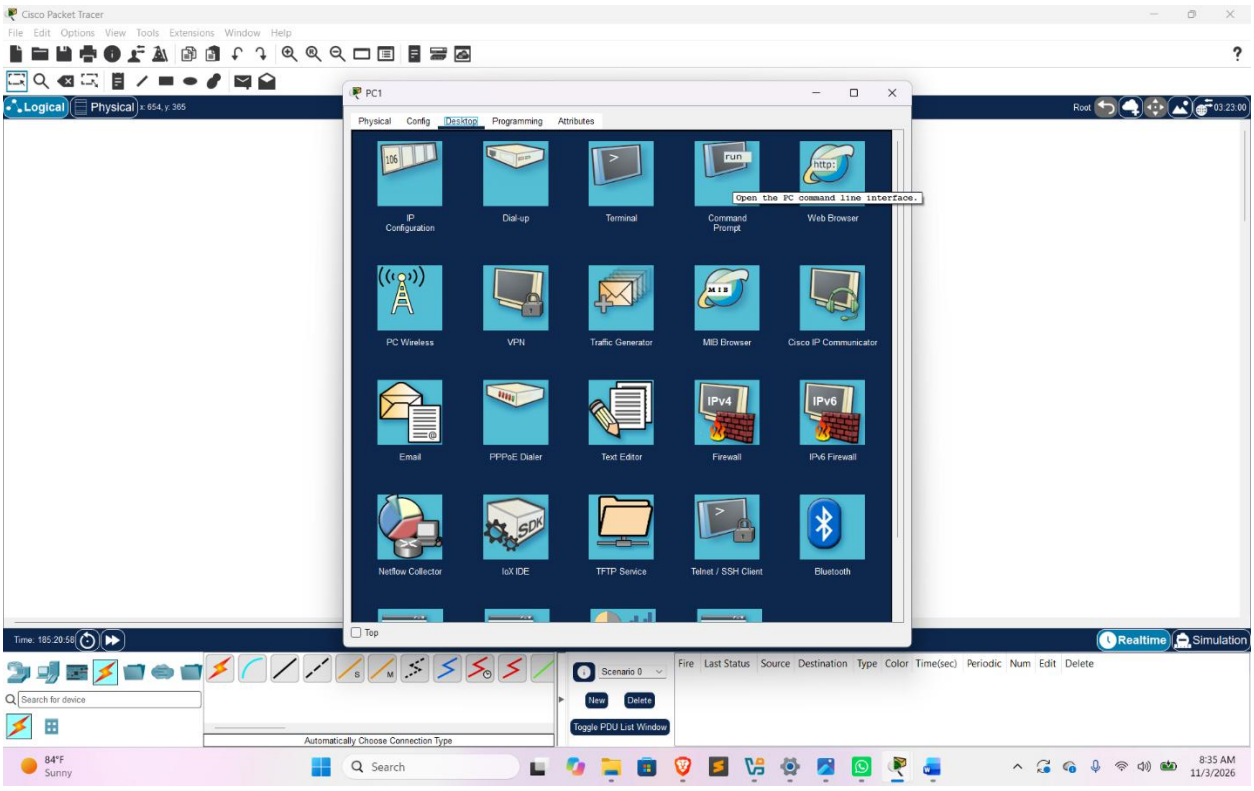

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
PC1
Physical Config Desktop Programming Attributes
MODULES
WMP300N
PT-HOST-NM-1AM
PT-HOST-NM-1CE
PT-HOST-NM-1CFE
PT-HOST-NM-1CGE
PT-HOST-NM-1FFE
PT-HOST-NM-1FFE-SM
PT-HOST-NM-1FGE
PT-HOST-NM-1FGE-SM
PT-HOST-NM-1W
PT-HOST-NM-1W-A
PT-HOST-NM-1W-AC
PT-HOST-NM-3G/4G
PT-HOST-NM-5G
PT-HOST-NM-COVER
PT-HEADPHONE
PT-MICROPHONE
Physical Device View
Zoom In
Original Size
Zoom Out
Customize Icon in Physical View
Customize Icon in Logical View
The WMP300N module provides one 2.4GHz wireless interface suitable for connection to wireless networks. The module supports protocols that use Ethernet for LAN access.
Top
Root
Realtime Simulation
Scenario 0
New
Delete
Toggle PDU List Window
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
PC-PT
84°F Sunny
Search
8:32 AM 11/3/2026

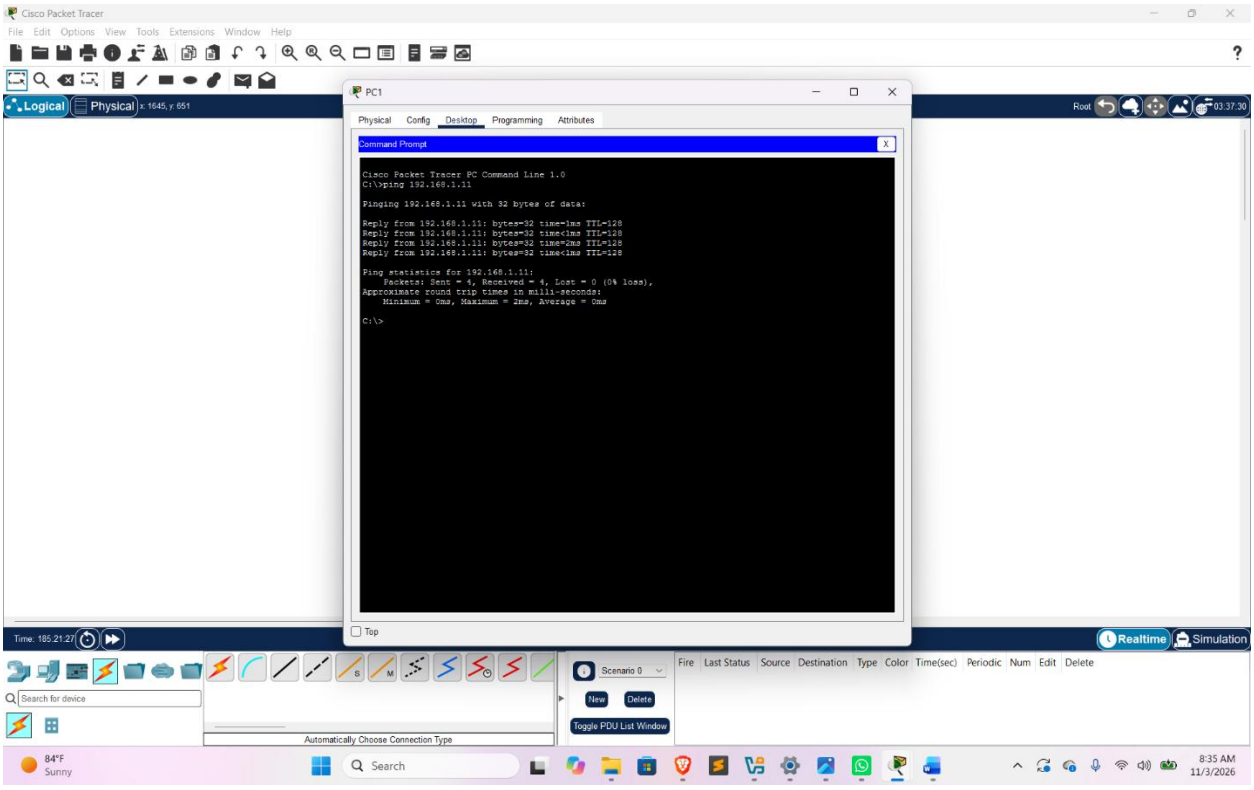

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
PC1
Physical Config Desktop Programming Attributes
IP Configuration
Dial-up
Terminal
Command Prompt
Web Browser
PC Wireless
VPN
Traffic Generator
MIB Browser
Cisco IP Communicator
Email
PPPoE Dialer
Text Editor
Firewall
IPv6 Firewall
Netflow Collector
IoX IDE
TFTP Service
Telnet / SSH Client
Bluetooth
Top
Root
Realtime Simulation
Scenario 0
New
Delete
Toggle PDU List Window
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
PC-PT
84°F Sunny
Search
8:33 AM 11/3/2026


Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical x: 1547, y: 696
Root 02:22:30
PC1
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
Subnet Mask
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address FE80::260:70FF:FE9A:5351
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top
Time: 185:18:57
Realtime Simulation
Scenario 0
New Delete
Toggle PDU List Window
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
PC-PT
84°F Sunny
Search
8:33 AM 11/3/2026

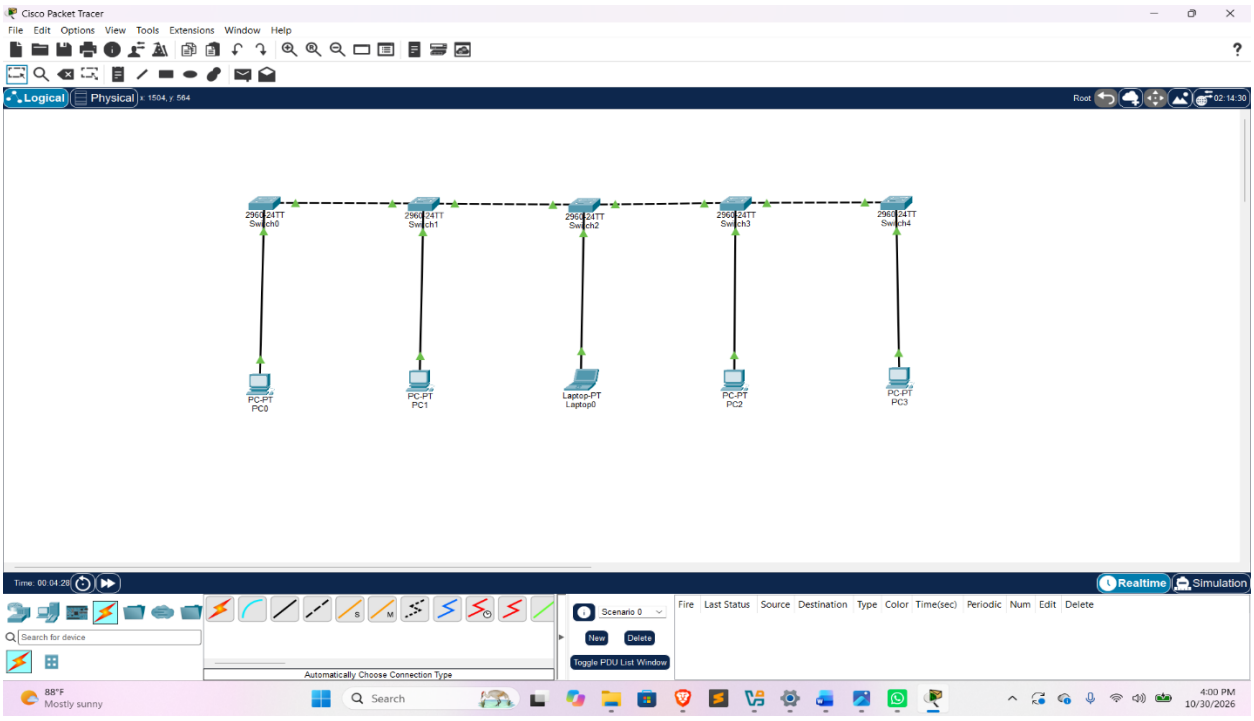

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical x: 1406, y: 432
Root 02:39:30
PC1
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address 192.168.1.10
Subnet Mask 255.255.255.0
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address FE80::260:70FF:FE9A:5351
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top
Time: 185:19:31
Realtime Simulation
Scenario 0
New Delete
Toggle PDU List Window
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
PC-PT
84°F Sunny
Search
8:33 AM 11/3/2026

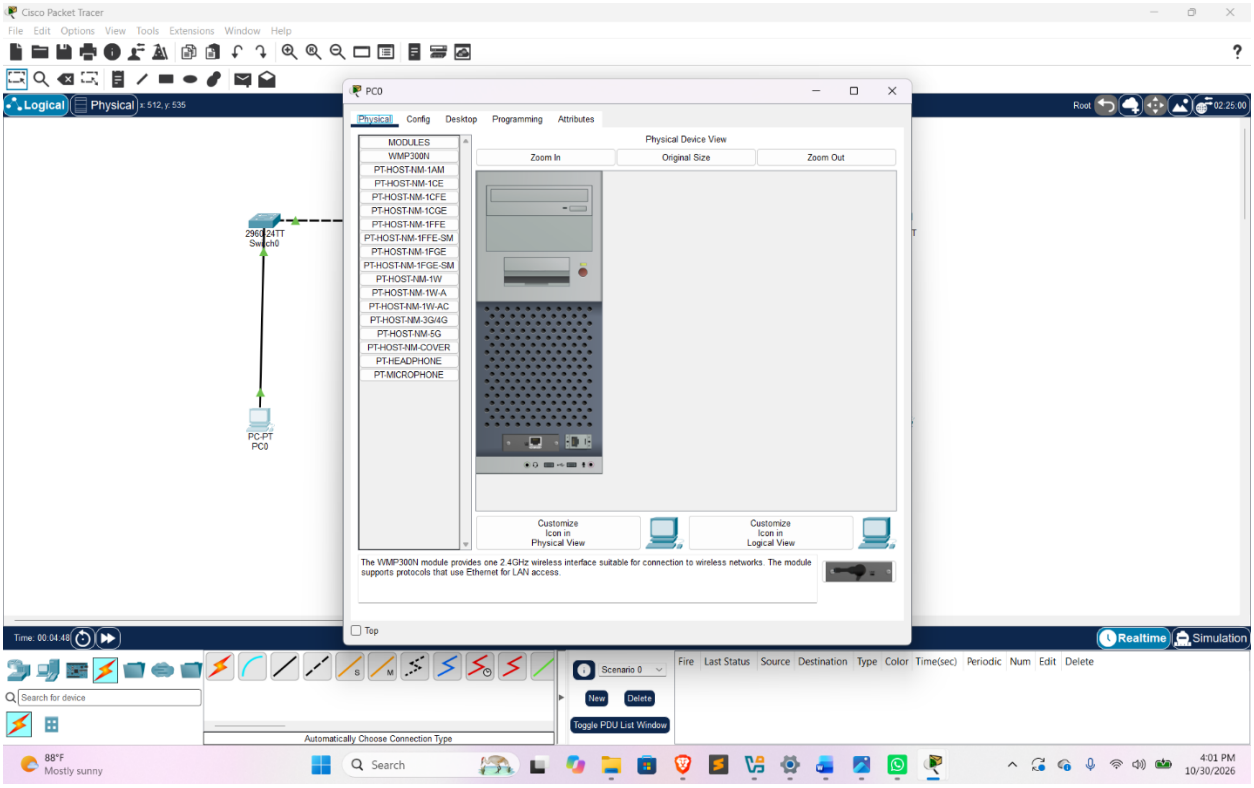
Vérification de la connection

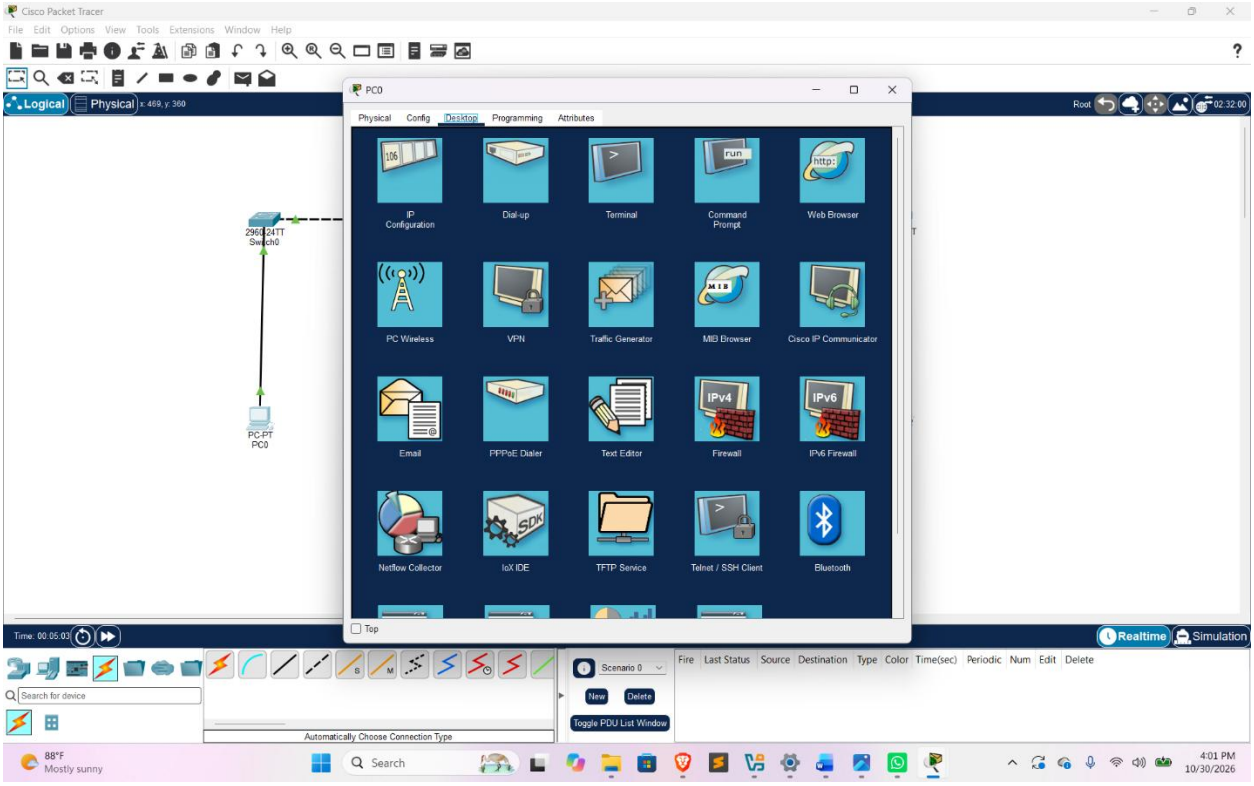


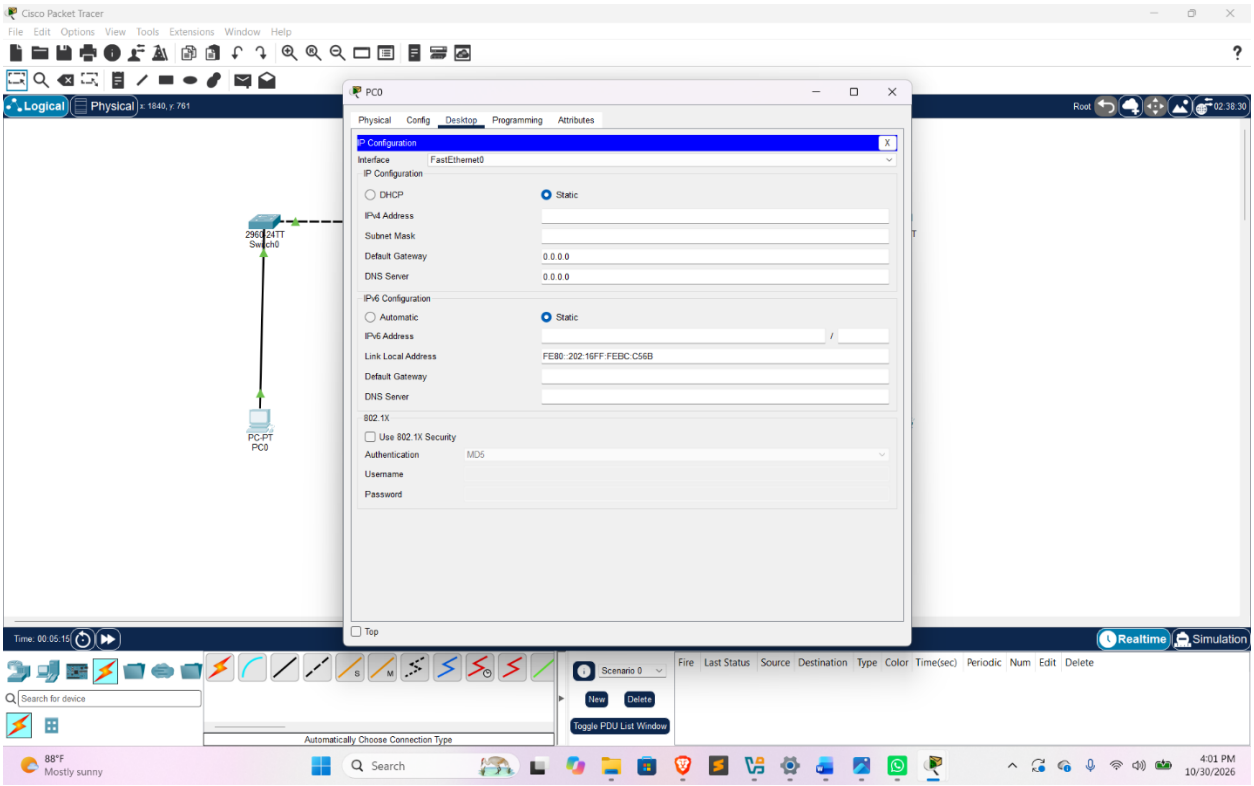


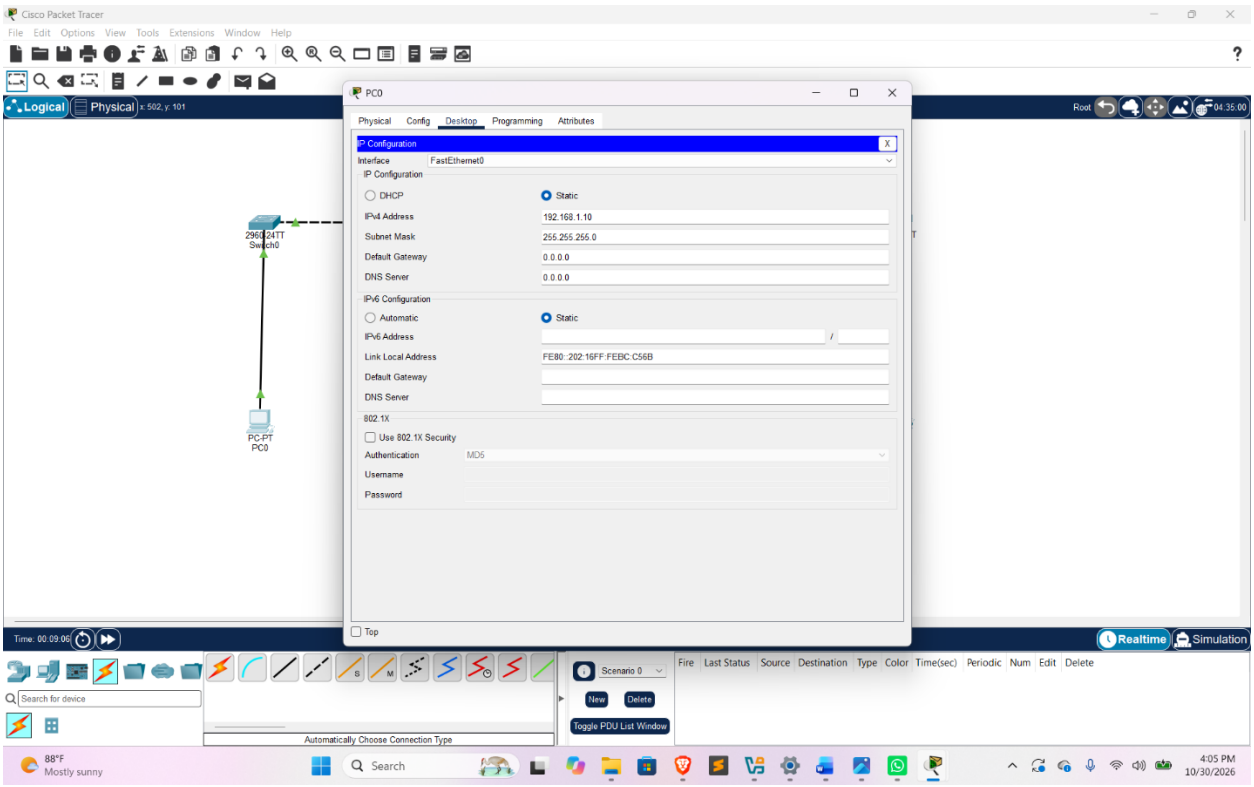
Question 3


Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
Root
2960-24TT Switch0
2960-24TT Switch1
2960-24TT Switch2
2960-24TT Switch3
2960-24TT Switch4
PC-PT PC0
PC-PT PC1
Laptop-PT Laptop0
PC-PT PC2
PC-PT PC3
Realtime Simulation
Scenario 0
New Delete
Toggle PDU List Window
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
Automatically Choose Connection Type
Search
4:00 PM
10/30/2026

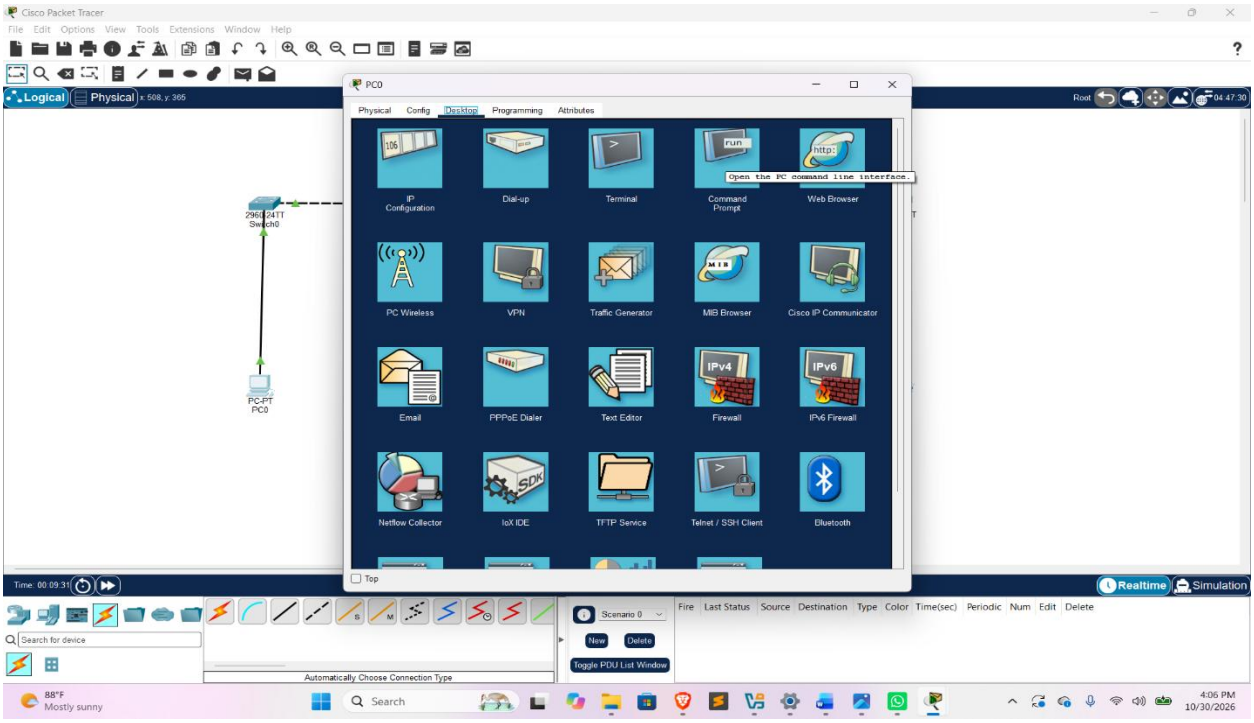

Cisco Packet Tracer
PC0
Physical Config Desktop Programming Attributes
Physical Device View
Zoom In Original Size Zoom Out
MODULES
WMP300N
PT-HOST-NM-1AM
PT-HOST-NM-1CE
PT-HOST-NM-1CFE
PT-HOST-NM-1CGE
PT-HOST-NM-1FFE
PT-HOST-NM-1FFE-SM
PT-HOST-NM-1FGE
PT-HOST-NM-1FGE-SM
PT-HOST-NM-1W
PT-HOST-NM-1W-A
PT-HOST-NM-1W-AC
PT-HOST-NM-3G/4G
PT-HOST-NM-5G
PT-HOST-NM-COVER
PT-HEADPHONE
PT-MICROPHONE
Customize Icon in Physical View
Customize Icon in Logical View
The WMP300N module provides one 2.4GHz wireless interface suitable for connection to wireless networks. The module supports protocols that use Ethernet for LAN access.
Top
Logical Physical
Root
2960-24TT Switch0
PC-PT PC0
Realtime Simulation
Scenario 0
New Delete
Toggle PDU List Window
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
Automatically Choose Connection Type
Search
4:01 PM
10/30/2026

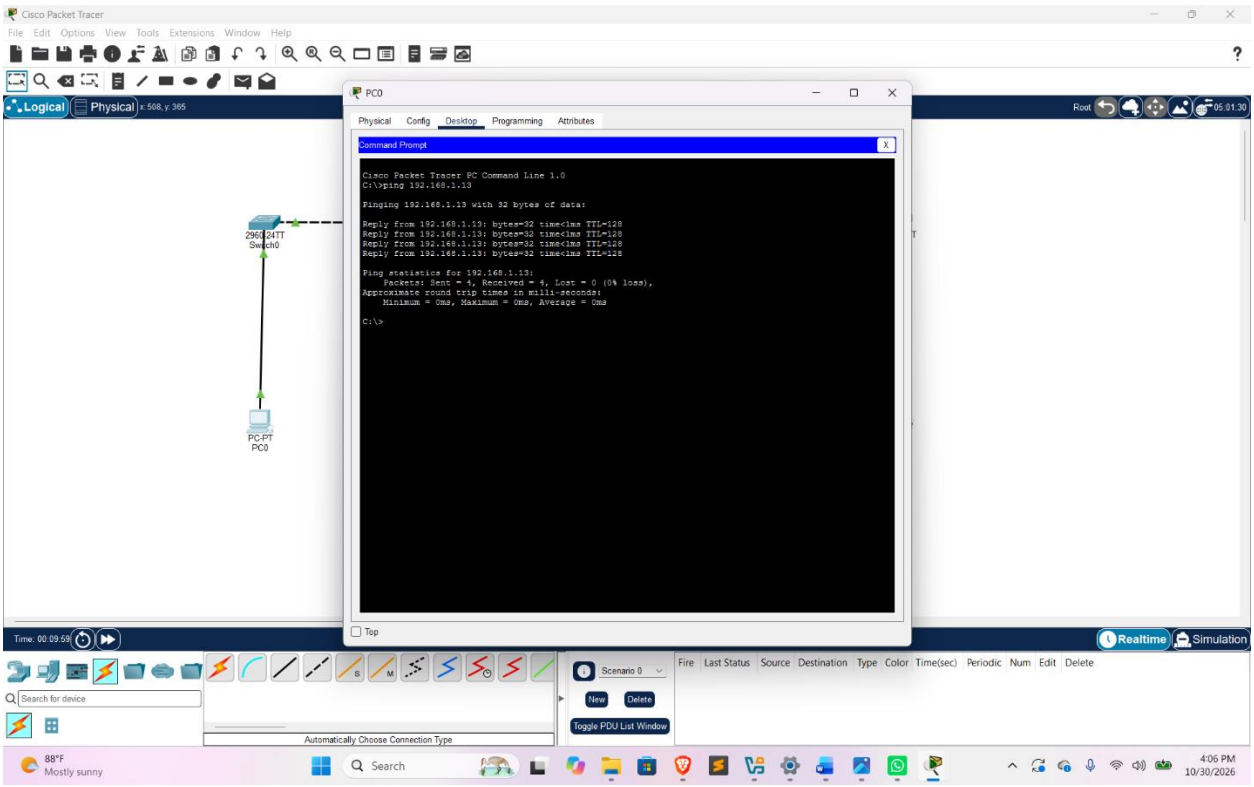

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
PC0
Physical Config Desktop Programming Attributes
IP Configuration
Dial-up
Terminal
Command Prompt
Web Browser
PC Wireless
VPN
Traffic Generator
MIB Browser
Cisco IP Communicator
Email
PPPoE Dialer
Text Editor
Firewall
IPv6 Firewall
Netflow Collector
IoX IDE
TFTP Service
Telnet / SSH Client
Bluetooth
Top
2960-24TT
Switch0
PC-PT
PC0
Realtime
Simulation
Scenario 0
New
Delete
Toggle PDU List Window
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
Automatically Choose Connection Type
88°F
Mostly sunny
Search
4:01 PM
10/30/2026


Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
PC0
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
Subnet Mask
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address FE80::202:16FF:FEBC:C56B
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top
2960-24TT
Switch0
PC-PT
PC0
Realtime
Simulation
Scenario 0
New
Delete
Toggle PDU List Window
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
Automatically Choose Connection Type
88°F
Mostly sunny
Search
4:01 PM
10/30/2026

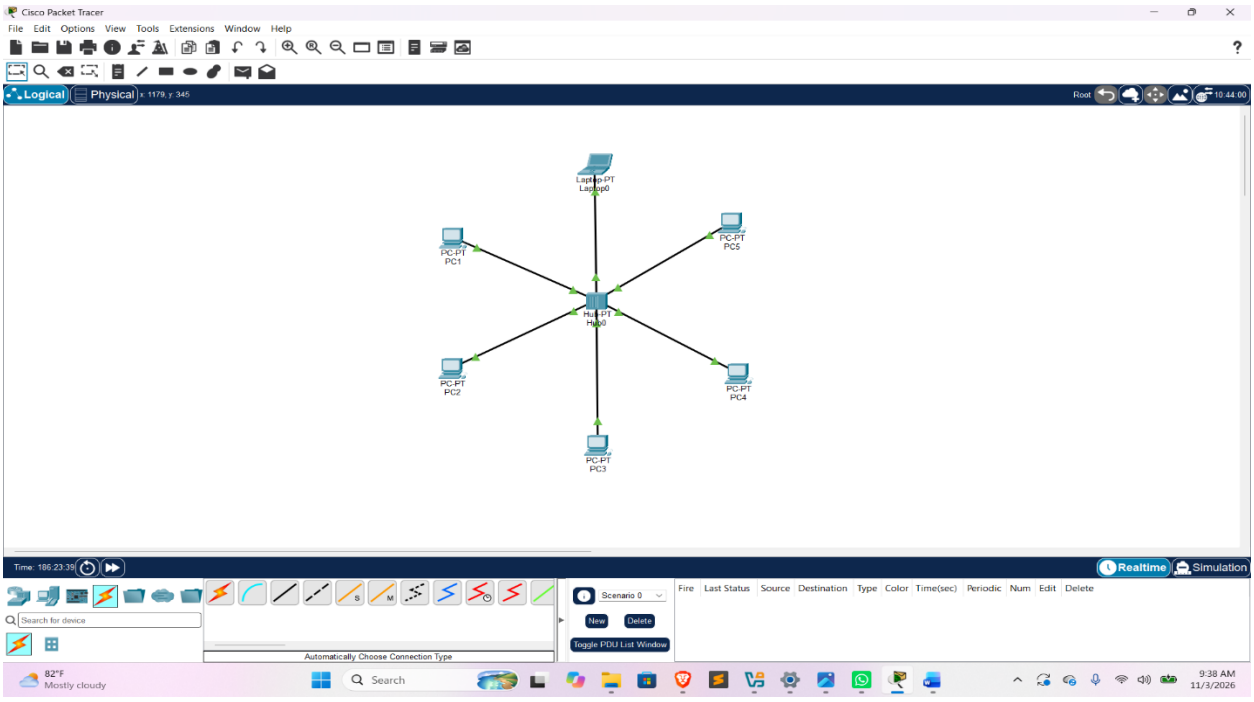


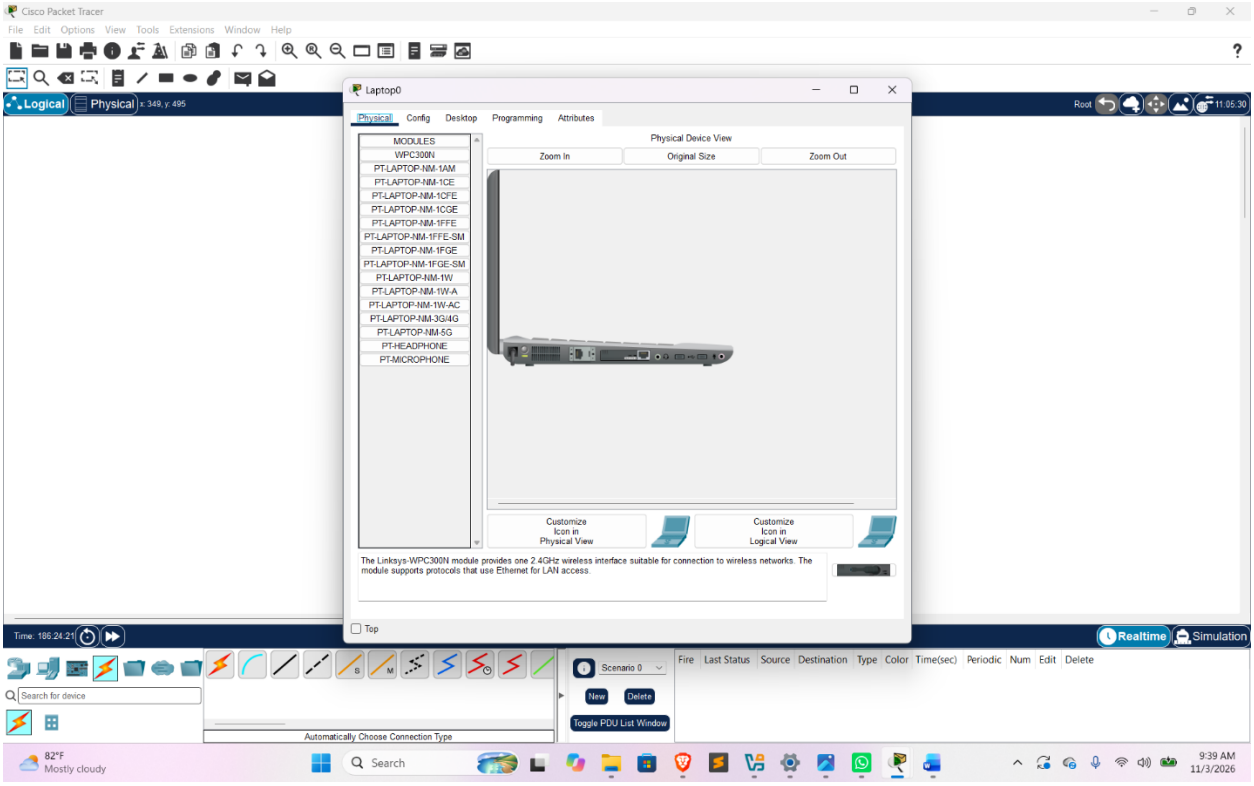
Vérification de la connection

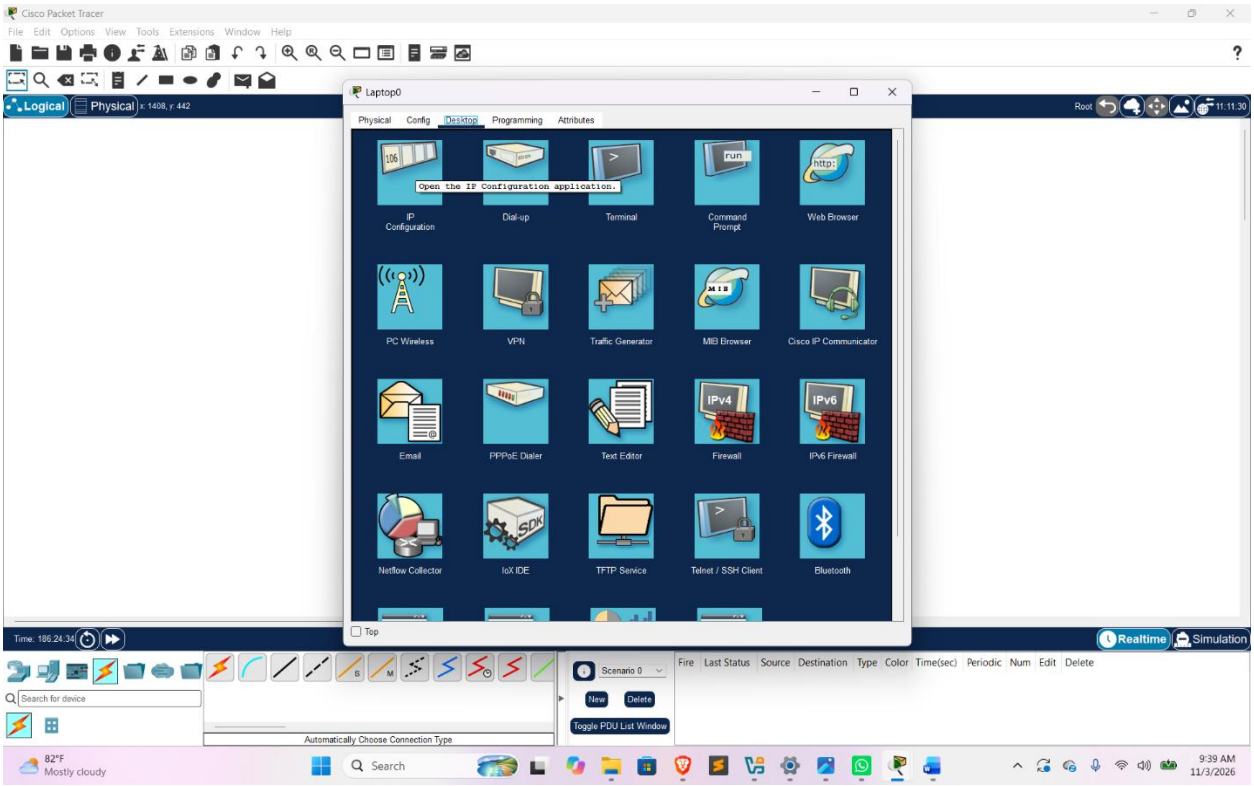


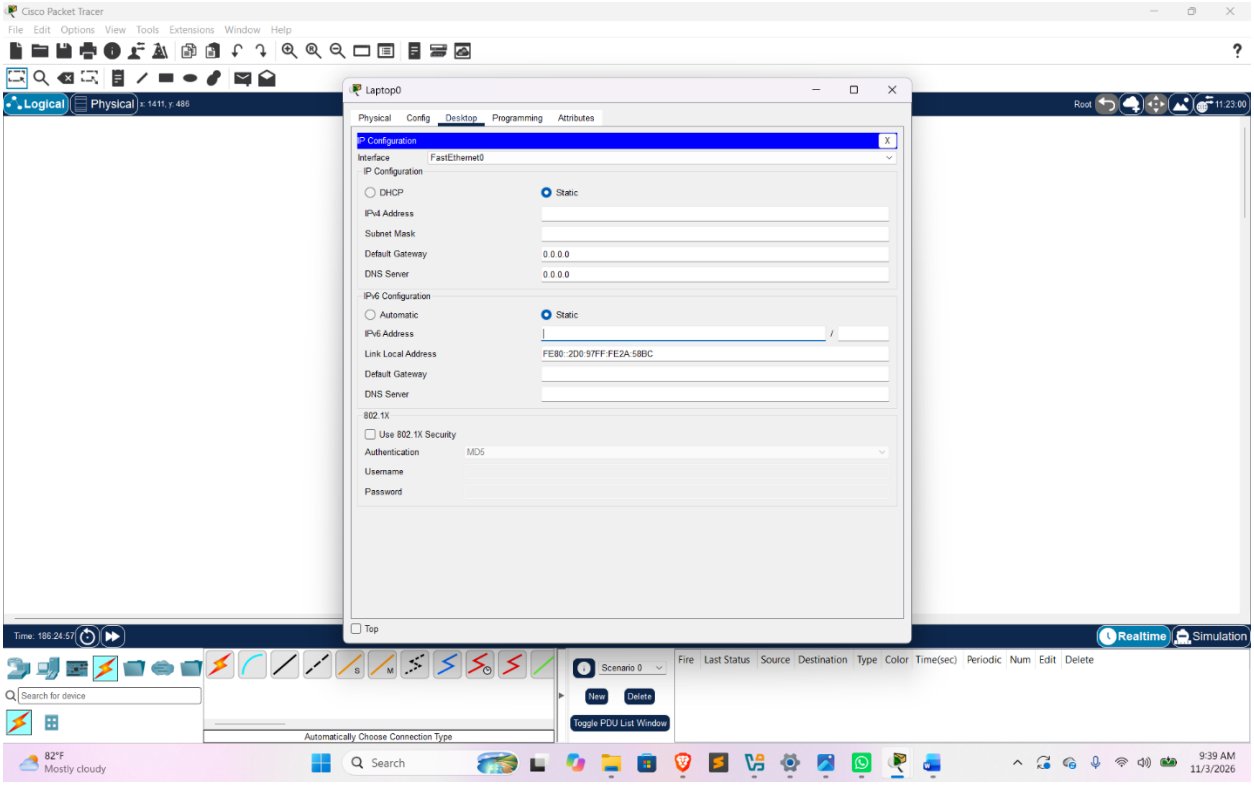

Cisco Packet Tracer
PC0
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.13
Pinging 192.168.1.13 with 32 bytes of data:
Reply from 192.168.1.13: bytes=32 time<1ms TTL=128
Reply from 192.168.1.13: bytes=32 time<1ms TTL=128
Reply from 192.168.1.13: bytes=32 time<1ms TTL=128
Reply from 192.168.1.13: bytes=32 time<1ms TTL=128
Ping statistics for 192.168.1.13:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>
Top
Logical
Physical
Realtime
Simulation
Automatically Choose Connection Type
Fire
Last Status
Source
Destination
Type
Color
Time(sec)
Periodic
Num
Edit
Delete

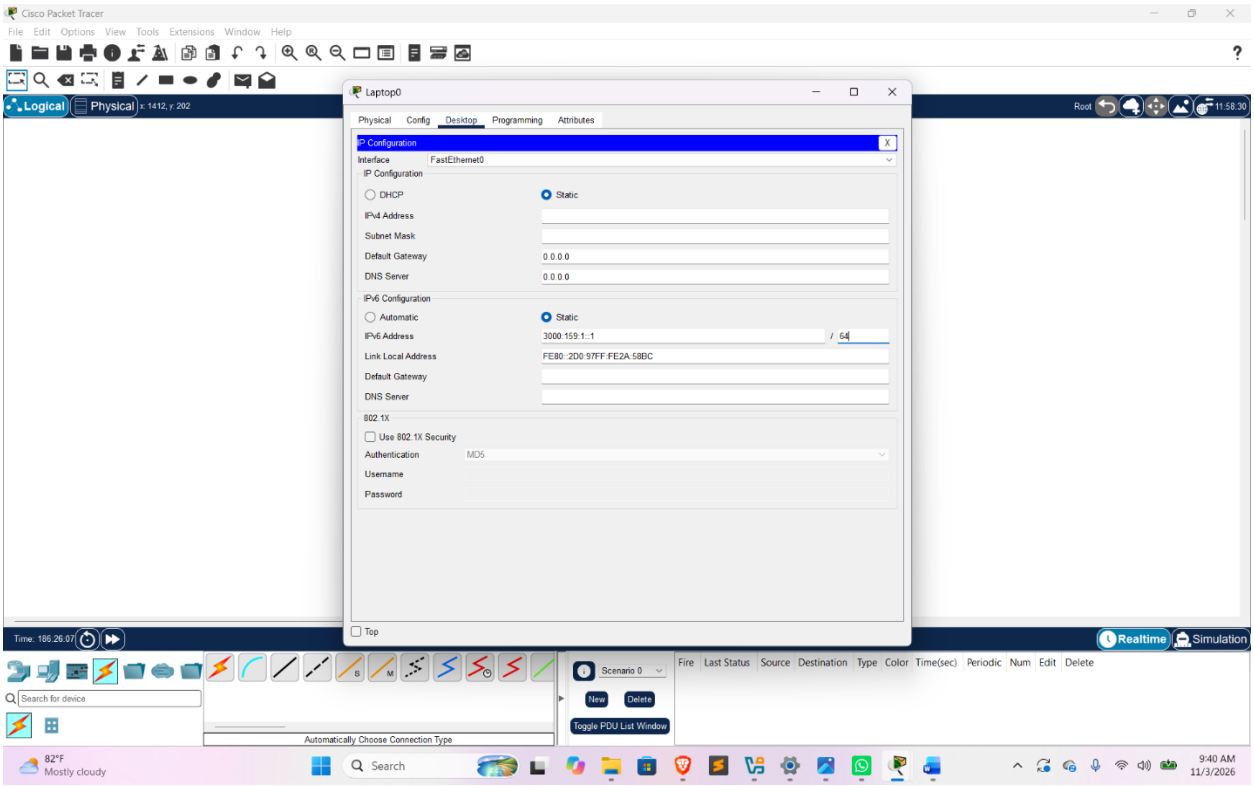
Question 4


Cisco Packet Tracer
Logical
Physical
Realtime
Simulation
Automatically Choose Connection Type
Fire
Last Status
Source
Destination
Type
Color
Time(sec)
Periodic
Num
Edit
Delete

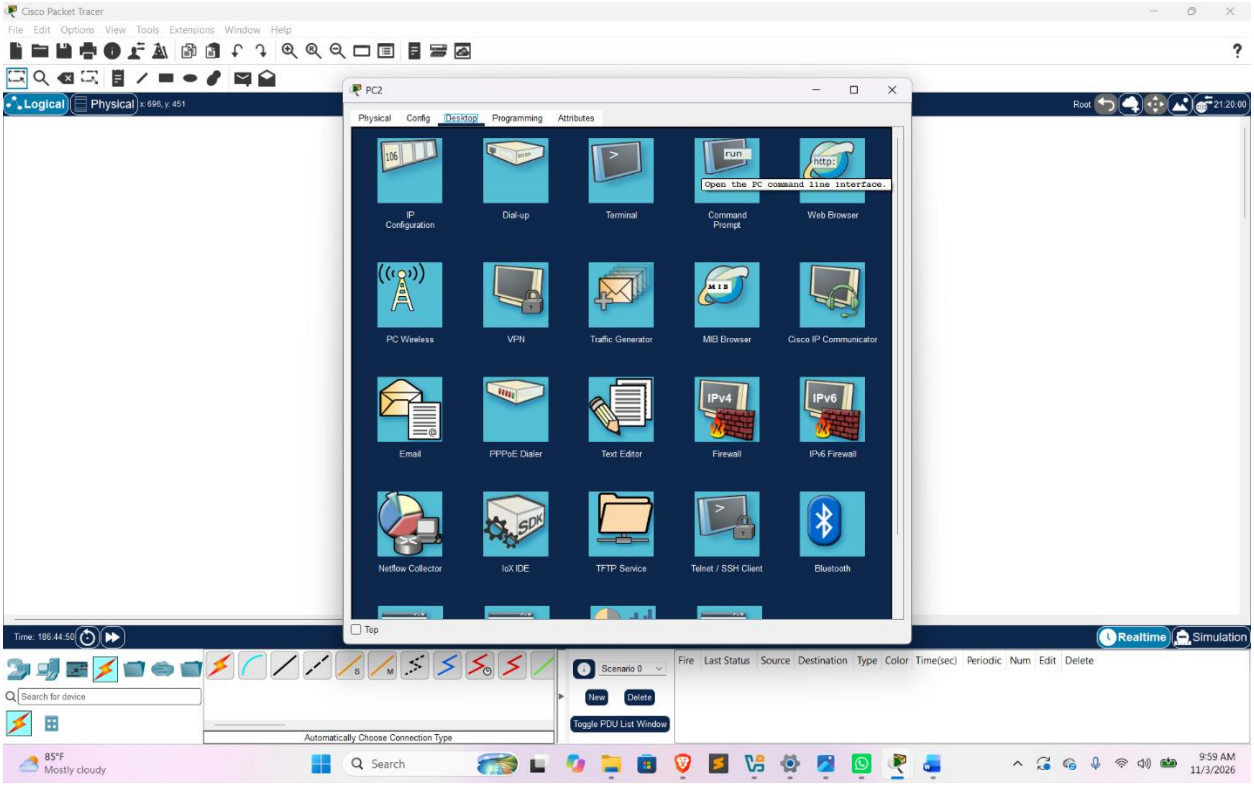

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
Laptop0
Physical Config Desktop Programming Attributes
MODULES
WPC300N
PT-LAPTOP-NM-1AM
PT-LAPTOP-NM-1CE
PT-LAPTOP-NM-1CFE
PT-LAPTOP-NM-1CGE
PT-LAPTOP-NM-1FFE
PT-LAPTOP-NM-1FFE-SM
PT-LAPTOP-NM-1FGE
PT-LAPTOP-NM-1FGE-SM
PT-LAPTOP-NM-1W
PT-LAPTOP-NM-1W-A
PT-LAPTOP-NM-1W-AC
PT-LAPTOP-NM-3G/4G
PT-LAPTOP-NM-5G
PT-HEADPHONE
PT-MICROPHONE
Physical Device View
Zoom In
Original Size
Zoom Out
Customize Icon in Physical View
Customize Icon in Logical View
The Linksys-WPC300N module provides one 2.4GHz wireless interface suitable for connection to wireless networks. The module supports protocols that use Ethernet for LAN access.
Top
Realtime Simulation
Scenario 0
New
Delete
Toggle PDU List Window
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
Automatically Choose Connection Type
82°F Mostly cloudy
Search
9:39 AM 11/3/2026

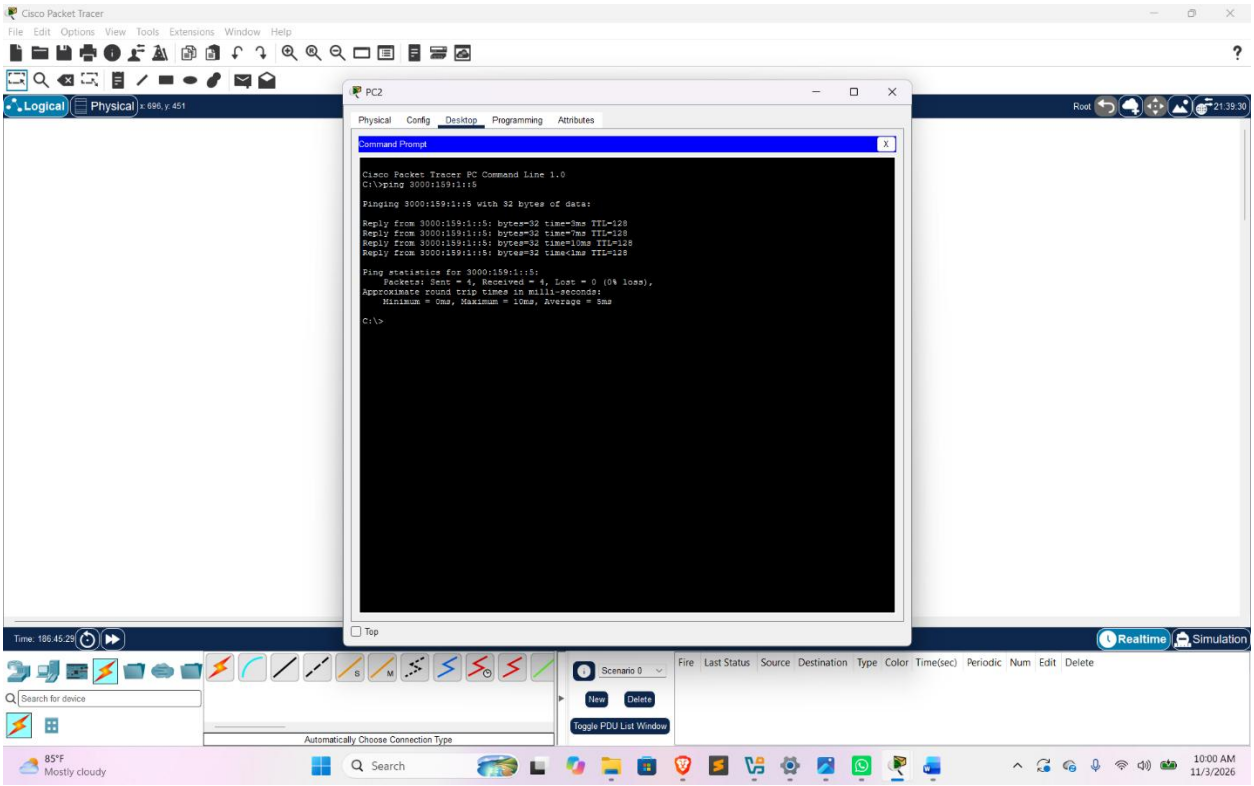

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
Laptop0
Physical Config Desktop Programming Attributes
Open the IP Configuration application.
IP Configuration
Dial-up
Terminal
Command Prompt
Web Browser
PC Wireless
VPN
Traffic Generator
MIB Browser
Cisco IP Communicator
Email
PPPoE Dialer
Text Editor
Firewall
IPv6 Firewall
Netflow Collector
IoX IDE
TFTP Service
Telnet / SSH Client
Bluetooth
Top
Realtime Simulation
Scenario 0
New
Delete
Toggle PDU List Window
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
Automatically Choose Connection Type
82°F Mostly cloudy
Search
9:39 AM 11/3/2026


Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical x: 1411, y: 486
Root 11:23:00
Laptop0
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
IP Configuration
DHCP Static
IPv4 Address
Subnet Mask
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic Static
IPv6 Address
Link Local Address FE80::2D0:97FF:FE2A:58BC
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top
Time: 186:24:57
Realtime Simulation
Scenario 0
New Delete
Toggle PDU List Window
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
Search for device
Automatically Choose Connection Type
82°F Mostly cloudy
Search
9:39 AM 11/3/2026

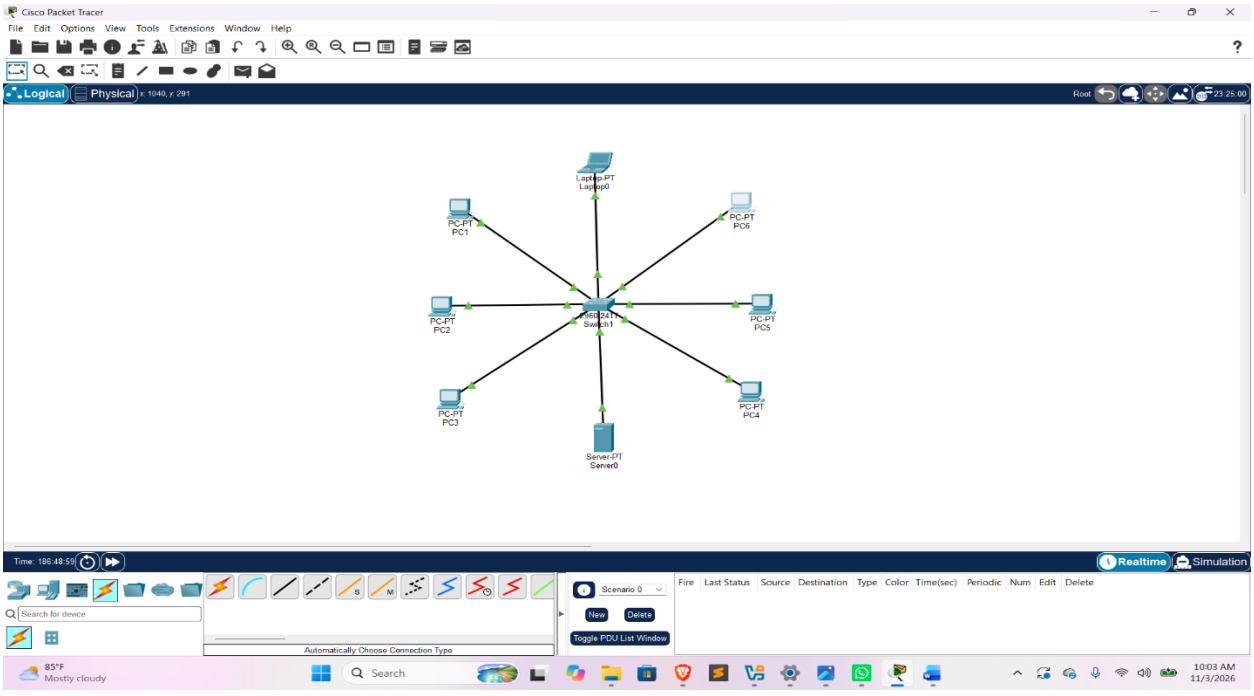

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical x: 1412, y: 202
Root 11:58:30
Laptop0
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
IP Configuration
DHCP Static
IPv4 Address
Subnet Mask
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic Static
IPv6 Address 3000:159:1::1 / 64
Link Local Address FE80::2D0:97FF:FE2A:58BC
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top
Time: 186:26:07
Realtime Simulation
Scenario 0
New Delete
Toggle PDU List Window
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
Search for device
Automatically Choose Connection Type
82°F Mostly cloudy
Search
9:40 AM 11/3/2026

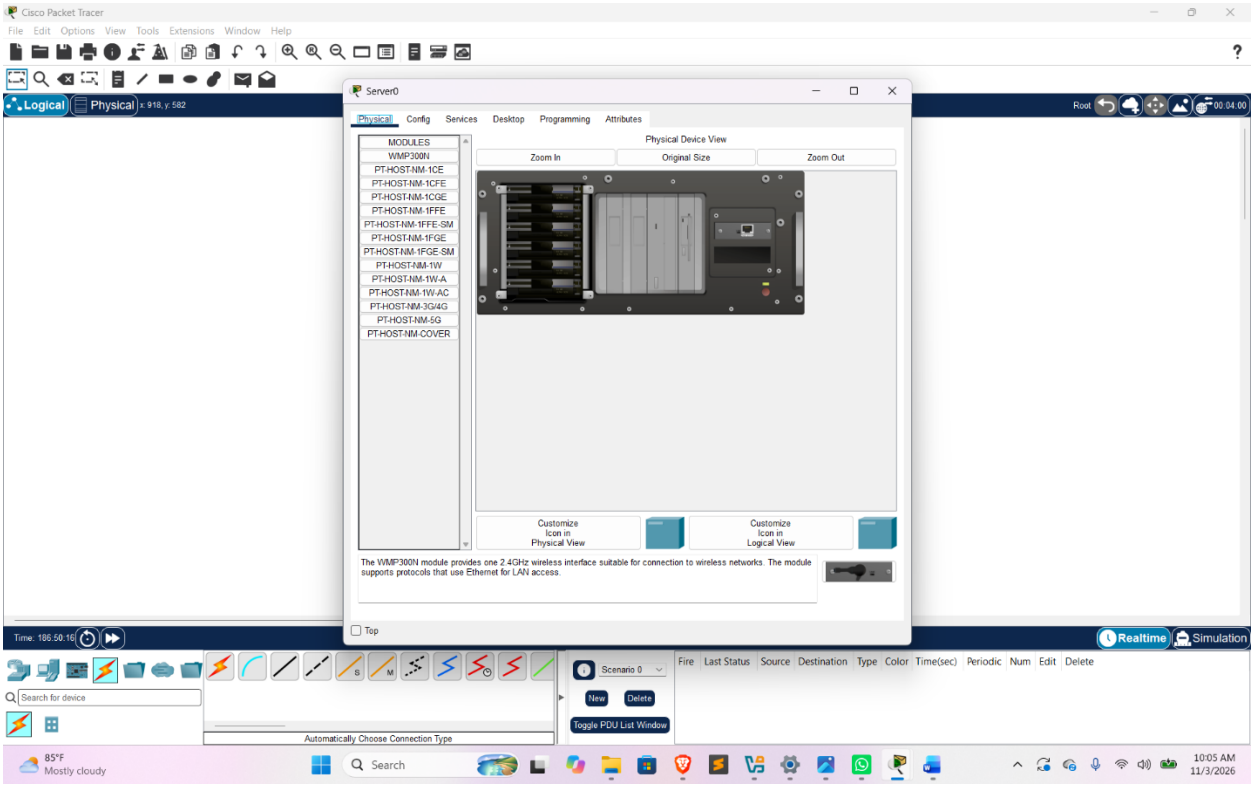
Vérification de la connection

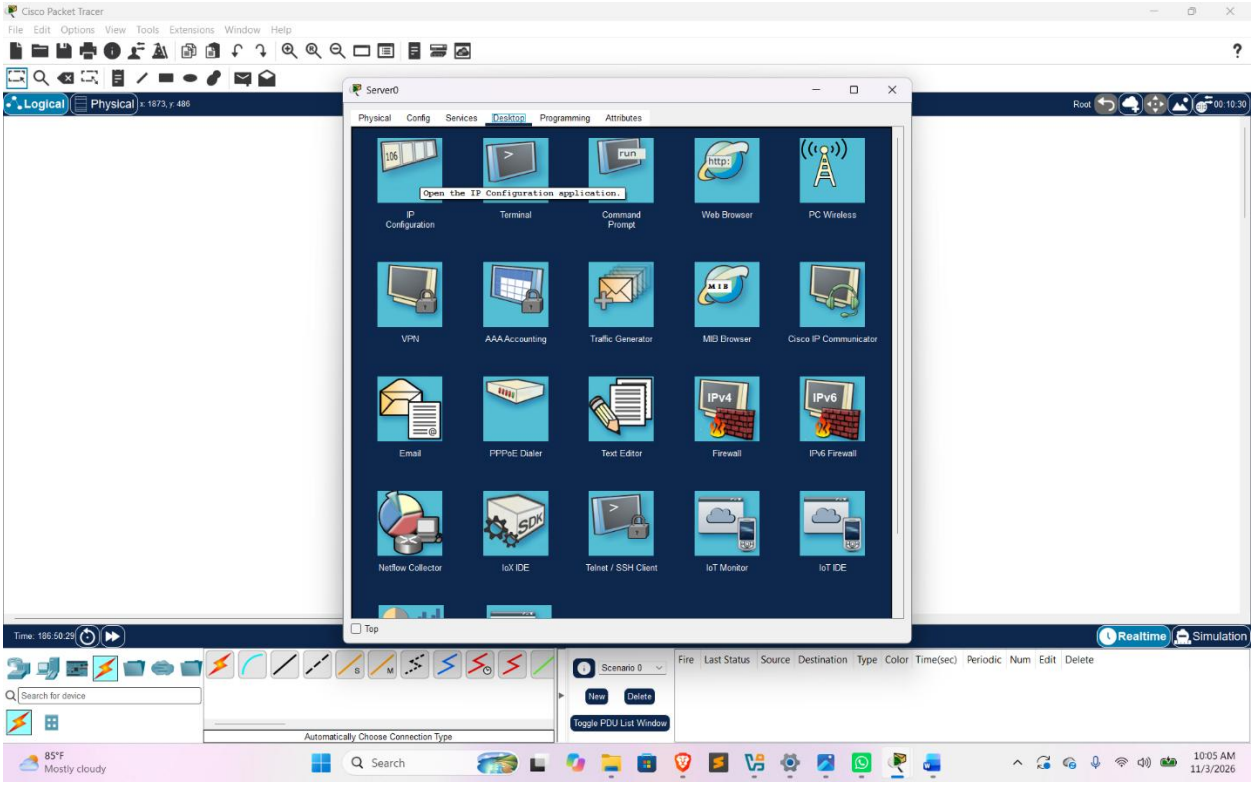


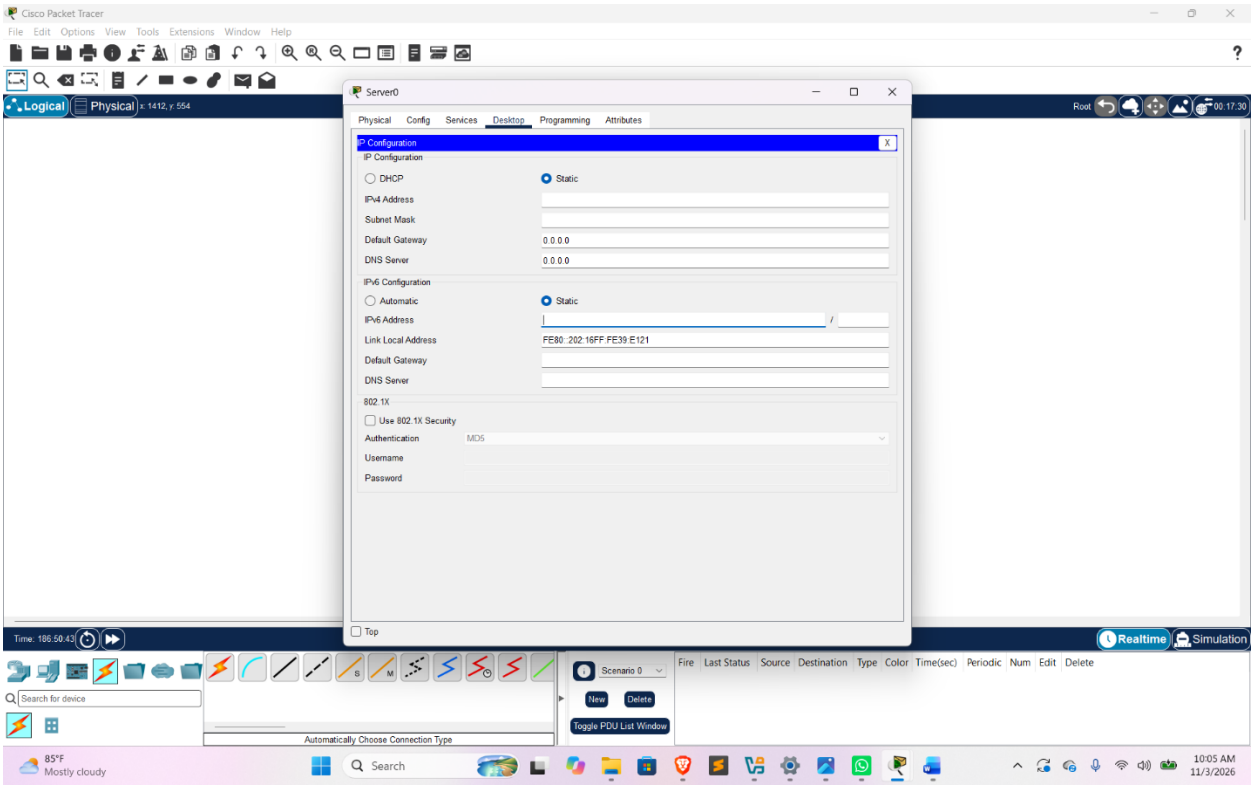


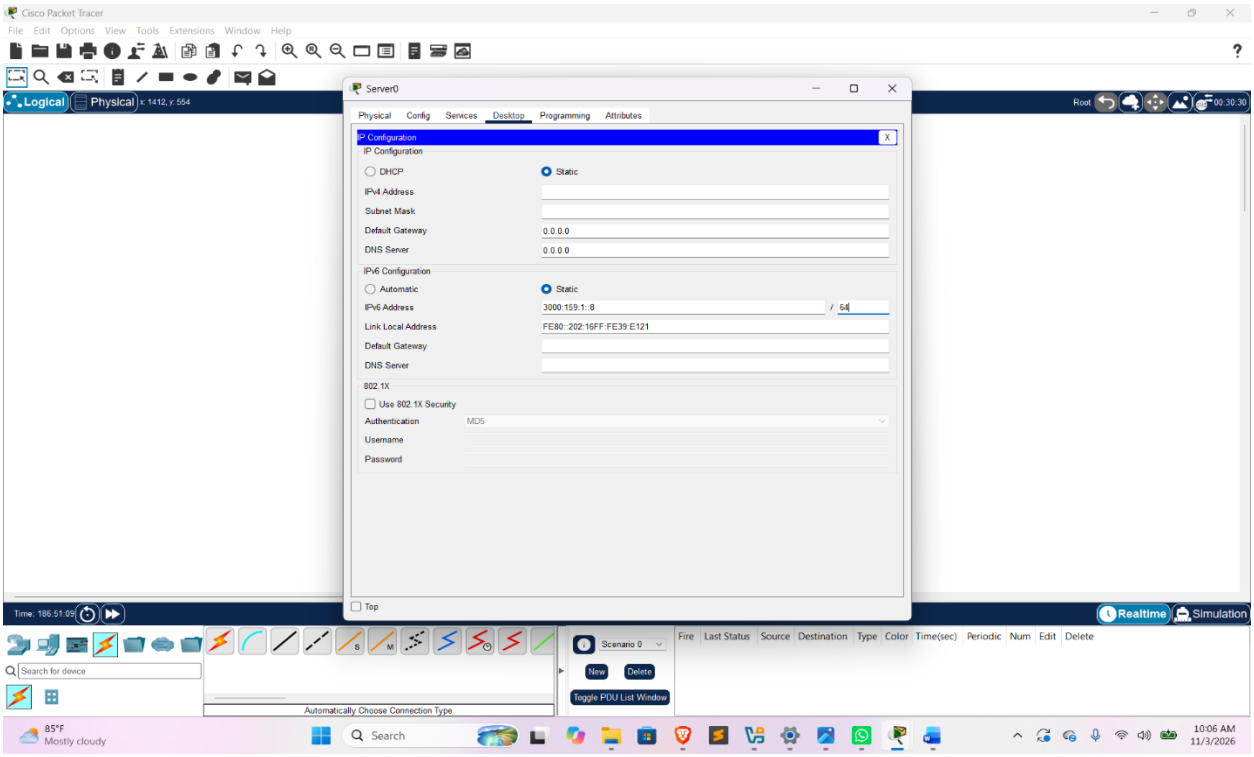
Question 5


Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
Root
Laptop-PT Laptop0
PC-PT PC1
PC-PT PC6
PC-PT PC2
PC-PT PC5
PC-PT PC3
PC-PT PC4
Server-PT Server0
Realtime Simulation
Scenario 0
New Delete
Toggle PDU List Window
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
Automatically Choose Connection Type
85°F Mostly cloudy
Search
10:03 AM 11/3/2026

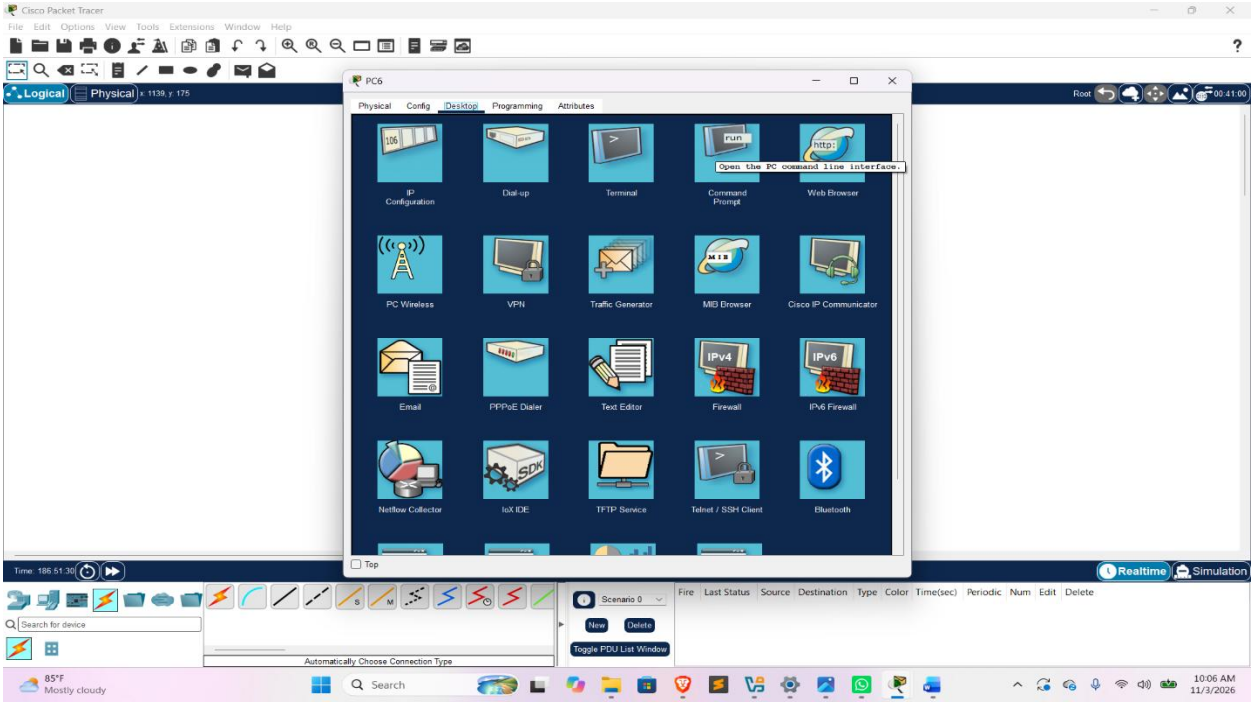

Cisco Packet Tracer
Server0
Physical Config Services Desktop Programming Attributes
MODULES
WMP300N
PT-HOST-NM-1CE
PT-HOST-NM-1CFE
PT-HOST-NM-1CGE
PT-HOST-NM-1FFE
PT-HOST-NM-1FFE-SM
PT-HOST-NM-1FGE
PT-HOST-NM-1FGE-SM
PT-HOST-NM-1W
PT-HOST-NM-1W-A
PT-HOST-NM-1W-AC
PT-HOST-NM-3G/4G
PT-HOST-NM-5G
PT-HOST-NM-COVER
Physical Device View
Zoom In Original Size Zoom Out
Customize Icon in Physical View
Customize Icon in Logical View
The WMP300N module provides one 2.4GHz wireless interface suitable for connection to wireless networks. The module supports protocols that use Ethernet for LAN access.
Top
Realtime Simulation
Scenario 0
New Delete
Toggle PDU List Window
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
Automatically Choose Connection Type
85°F Mostly cloudy
Search
10:05 AM 11/3/2026

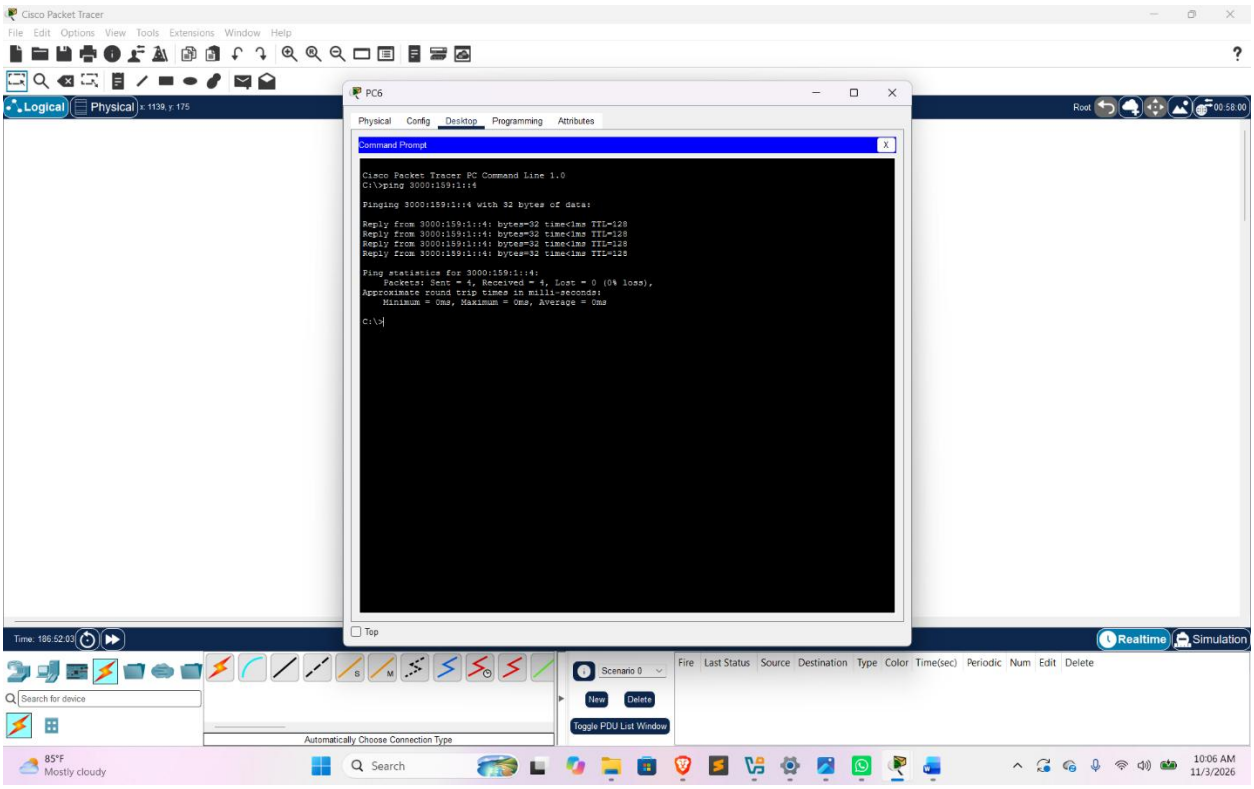

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
Server0
Physical Config Services Desktop Programming Attributes
Open the IP Configuration application.
IP Configuration
Terminal
Command Prompt
Web Browser
PC Wireless
VPN
AAA Accounting
Traffic Generator
MIB Browser
Cisco IP Communicator
Email
PPPoE Dialer
Text Editor
Firewall
IPv6 Firewall
Netflow Collector
IoX IDE
Telnet / SSH Client
IoT Monitor
IoT IDE
Top
Realtime Simulation
Scenario 0
New Delete
Toggle PDU List Window
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
Automatically Choose Connection Type
85°F Mostly cloudy
Search
10:05 AM 11/3/2026


Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
Server0
Physical Config Services Desktop Programming Attributes
IP Configuration
IP Configuration
DHCP
Static
IPv4 Address
Subnet Mask
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address FE80::202:16FF:FE39:E121
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top
Realtime Simulation
Scenario 0
New Delete
Toggle PDU List Window
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
Automatically Choose Connection Type
85°F Mostly cloudy
Search
10:05 AM 11/3/2026

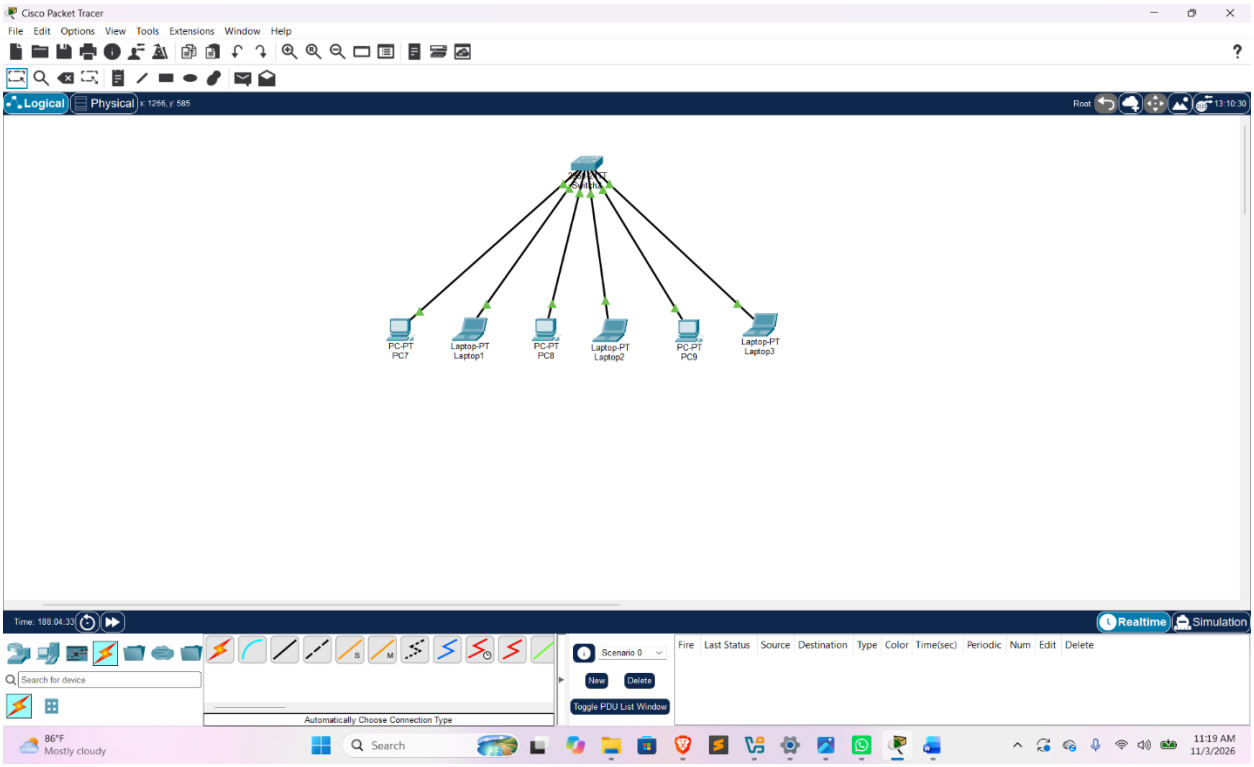


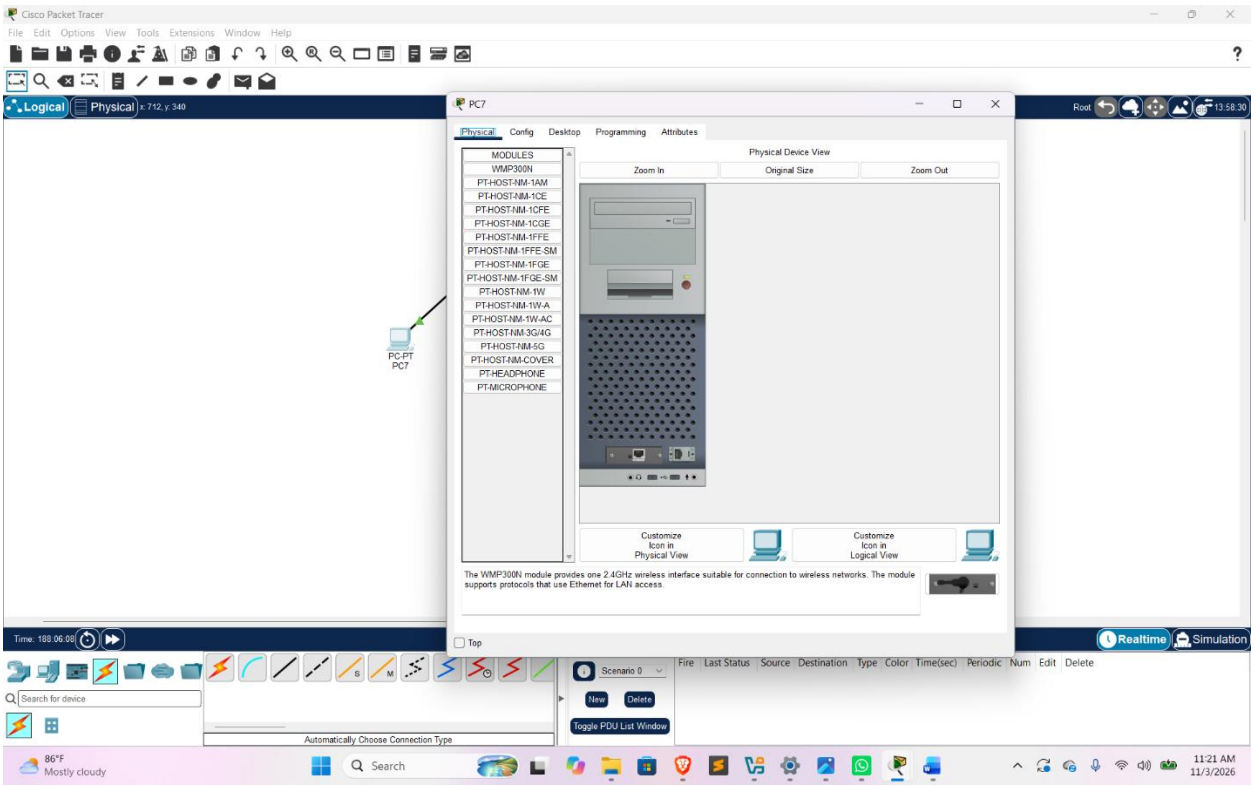
Vérification de la connection

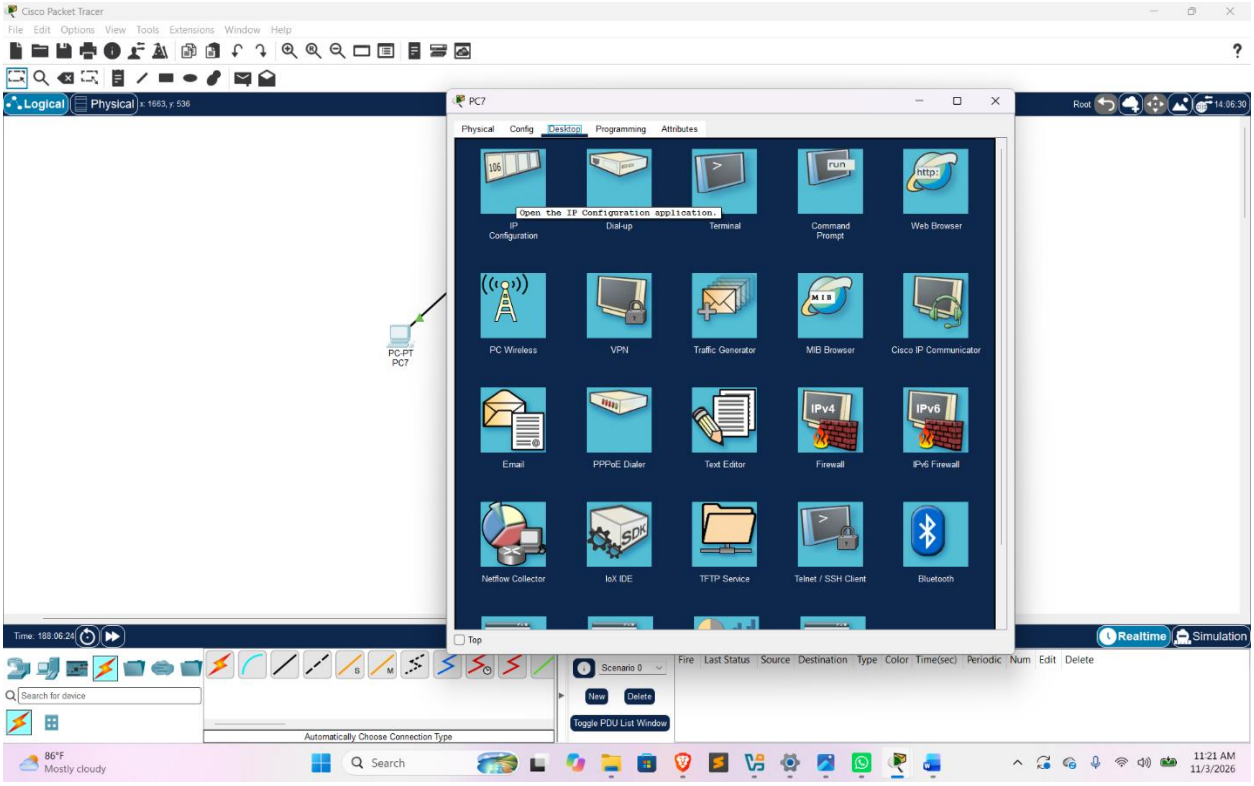


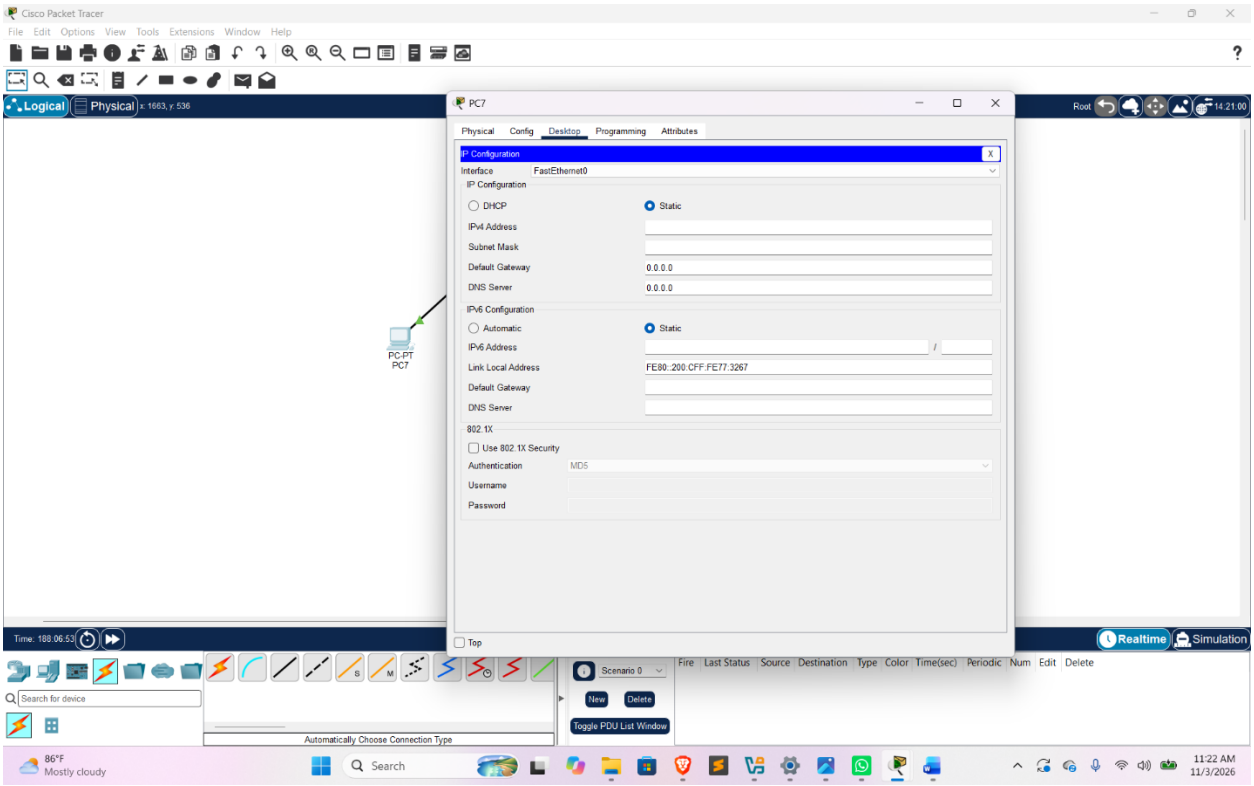

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical x: 1139, y: 175
Root 00:58:00
PC6
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 3000:159:1::4
Pinging 3000:159:1::4 with 32 bytes of data:
Reply from 3000:159:1::4: bytes=32 time<1ms TTL=128
Reply from 3000:159:1::4: bytes=32 time<1ms TTL=128
Reply from 3000:159:1::4: bytes=32 time<1ms TTL=128
Reply from 3000:159:1::4: bytes=32 time<1ms TTL=128
Ping statistics for 3000:159:1::4:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>
Top
Time: 186:52:03
Realtime Simulation
Search for device
Automatically Choose Connection Type
Scenario 0
New Delete
Toggle PDU List Window
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
85°F
Mostly cloudy
Search
10:06 AM
11/3/2026

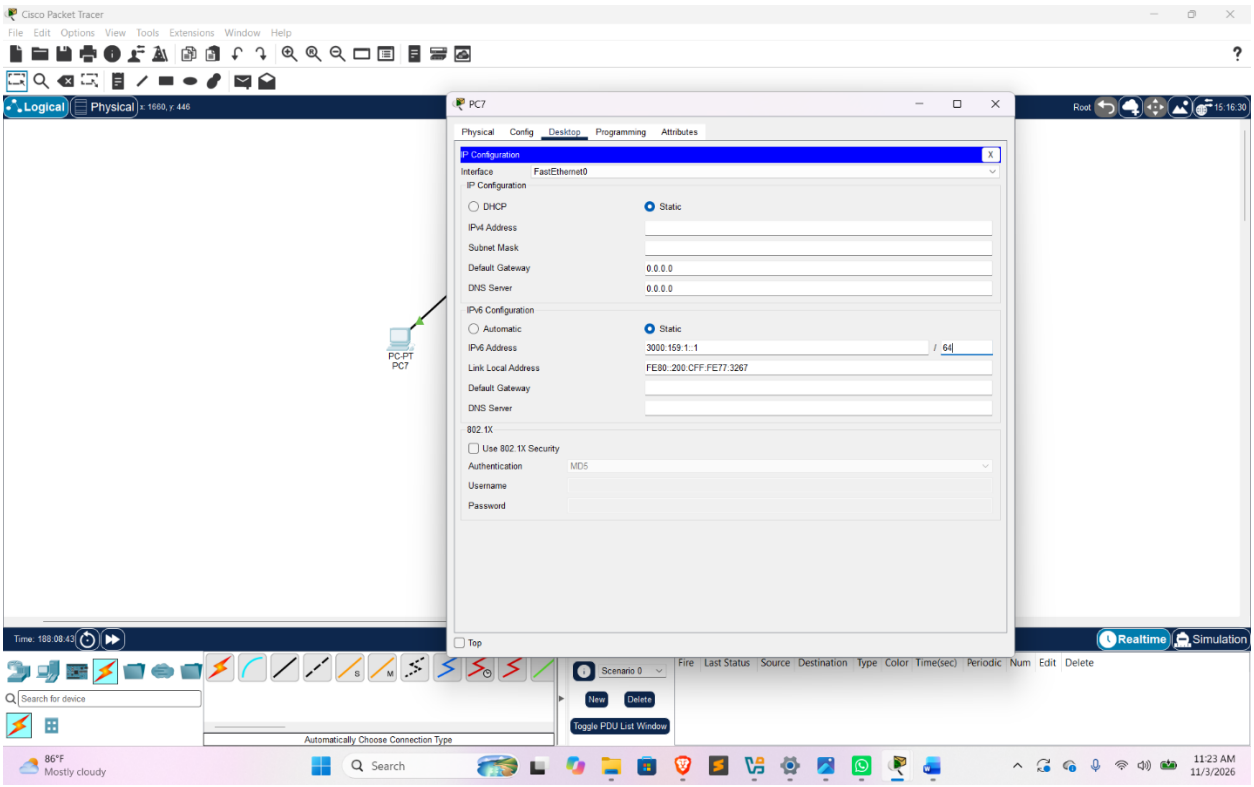
Question 6


Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
PC-PT PC7
Laptop-PT Laptop1
PC-PT PC8
Laptop-PT Laptop2
PC-PT PC9
Laptop-PT Laptop3
Realtime Simulation
Automatically Choose Connection Type
Scenario 0
New Delete
Toggle PDU List Window
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
86°F Mostly cloudy
Search
11:19 AM 11/3/2026

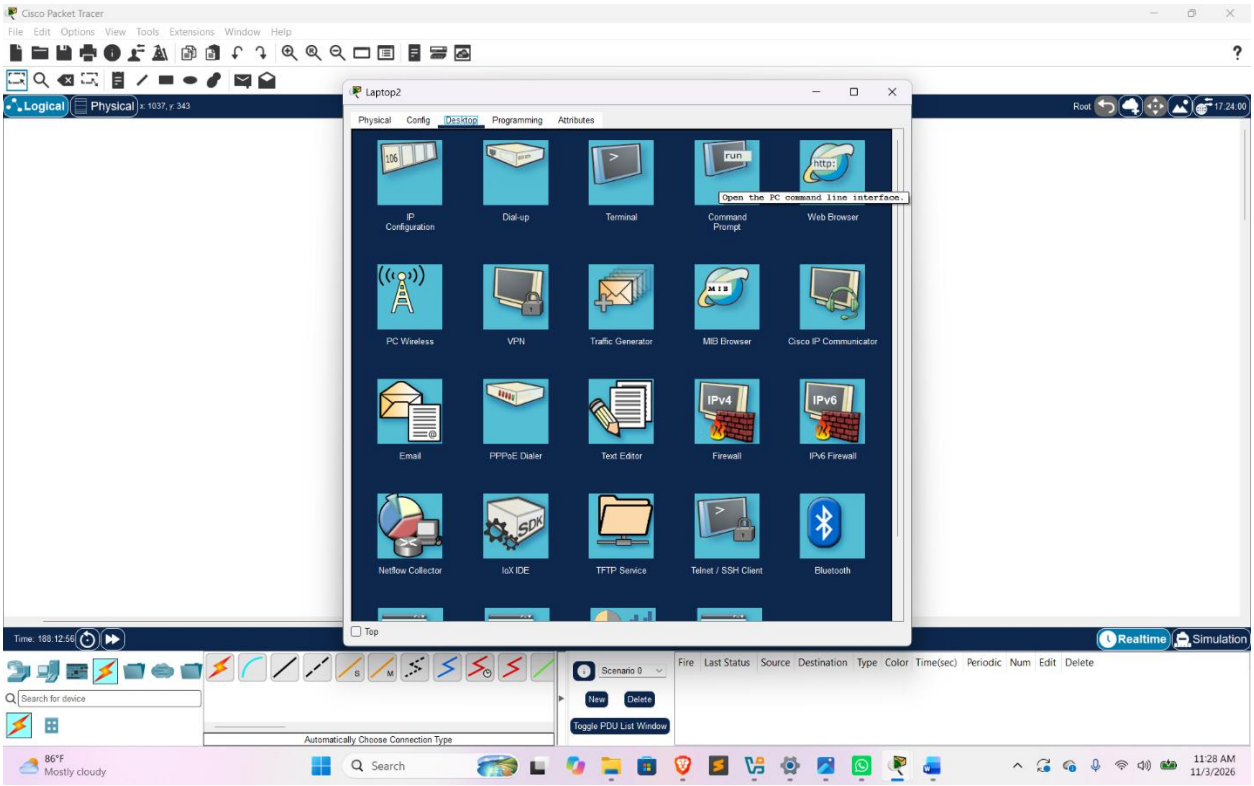

Cisco Packet Tracer
Logical Physical
PC7
Physical Config Desktop Programming Attributes
MODULES
WMP300N
PT-HOST-NM-1AM
PT-HOST-NM-1CE
PT-HOST-NM-1CFE
PT-HOST-NM-1CGE
PT-HOST-NM-1FFE
PT-HOST-NM-1FFE-SM
PT-HOST-NM-1FGE
PT-HOST-NM-1FGE-SM
PT-HOST-NM-1W
PT-HOST-NM-1W-A
PT-HOST-NM-1W-AC
PT-HOST-NM-3G/4G
PT-HOST-NM-5G
PT-HOST-NM-COVER
PT-HEADPHONE
PT-MICROPHONE
Physical Device View
Zoom In Original Size Zoom Out
Customize Icon in Physical View
Customize Icon in Logical View
The WMP300N module provides one 2.4GHz wireless interface suitable for connection to wireless networks. The module supports protocols that use Ethernet for LAN access.
Top
PC-PT PC7
Realtime Simulation
Automatically Choose Connection Type
Scenario 0
New Delete
Toggle PDU List Window
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
86°F Mostly cloudy
Search
11:21 AM 11/3/2026

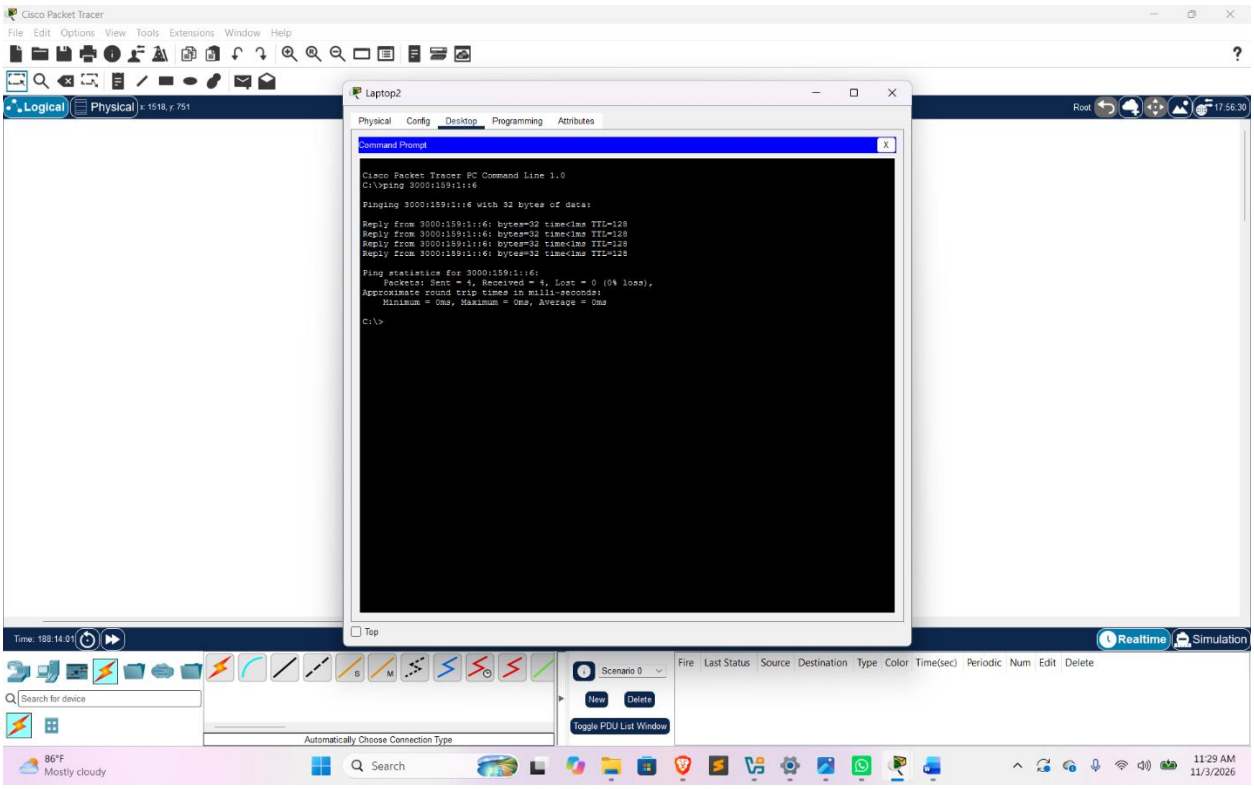

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
PC7
Physical Config Desktop Programming Attributes
Open the IP Configuration application.
IP Configuration
Dial-up
Terminal
Command Prompt
Web Browser
PC Wireless
VPN
Traffic Generator
MIB Browser
Cisco IP Communicator
Email
PPPoE Dialer
Text Editor
Firewall
IPv6 Firewall
Netflow Collector
IoX IDE
TFTP Service
Telnet / SSH Client
Bluetooth
PC-PT PC7
Top
Realtime Simulation
Scenario 0
New
Delete
Toggle PDU List Window
Automatically Choose Connection Type
86°F Mostly cloudy
Search
11:21 AM 11/3/2026


Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
PC7
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
Subnet Mask
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address FE80::200:CFF:FE77:3267
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
PC-PT PC7
Top
Realtime Simulation
Scenario 0
New
Delete
Toggle PDU List Window
Automatically Choose Connection Type
86°F Mostly cloudy
Search
11:22 AM 11/3/2026



Vérification de la connection




Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical
Physical
Laptop2
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 3000:159:1::6
Pinging 3000:159:1::6 with 32 bytes of data:
Reply from 3000:159:1::6: bytes=32 time<1ms TTL=128
Reply from 3000:159:1::6: bytes=32 time<1ms TTL=128
Reply from 3000:159:1::6: bytes=32 time<1ms TTL=128
Reply from 3000:159:1::6: bytes=32 time<1ms TTL=128
Ping statistics for 3000:159:1::6:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>
Top
Realtime
Simulation
Scenario 0
New
Delete
Toggle PDU List Window
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
Automatically Choose Connection Type
86°F
Mostly cloudy
Search
11:29 AM
11/3/2026

Conclusion

Ce TD nous a permis de mieux comprendre le fonctionnement des adresses IPv4 et IPv6. Nous avons appris à configurer les adresses IP dans Cisco Packet Tracer, à construire différentes topologies réseau et à vérifier la communication entre les équipements grâce à la commande ping. Malgré certaines difficultés rencontrées pendant la configuration et la construction des différentes topologies sur Cisco, nous avons pu améliorer notre compréhension des réseaux informatiques.