# FALCUTÉ DES SCIENCES ET TECHNOLOGIES

# (FST)

## TROISIÈME ANNÉE L3

Rapport de Laboratoire

Cours :Réseaux 1

Nom et Prénom : St Juste Rood Shaïna

Professeur : Ismaël SAINT AMOUR

**13 Novembre 2026**

## L'objectif de ce TD est de :

Les objectifs principaux sont les suivants :

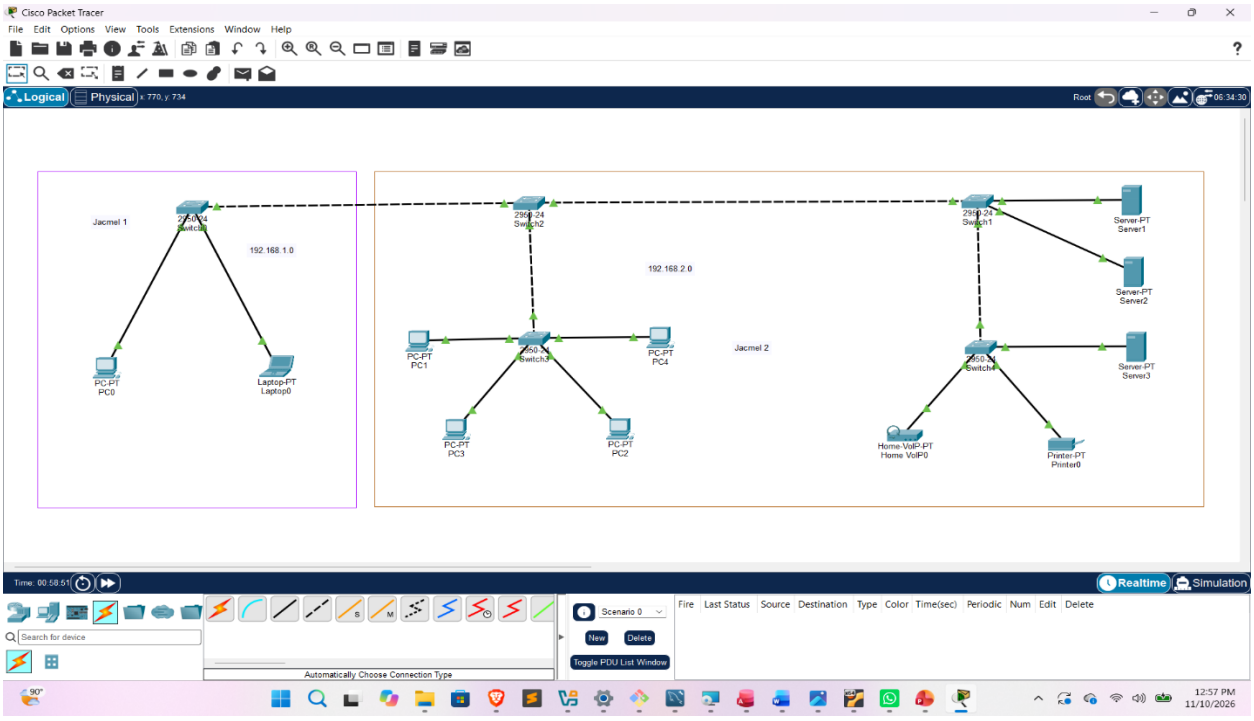
• Découvrir les commandes de configuration de base d'un switch et d'un routeur.
• Attribuer des adresses IPv4 ou IPv6 aux équipements.
• Tester la connectivité entre les hôtes à l'aide de la commande ping.
• Utiliser le Mode Simulation pour observer et analyser le cheminement des paquets.

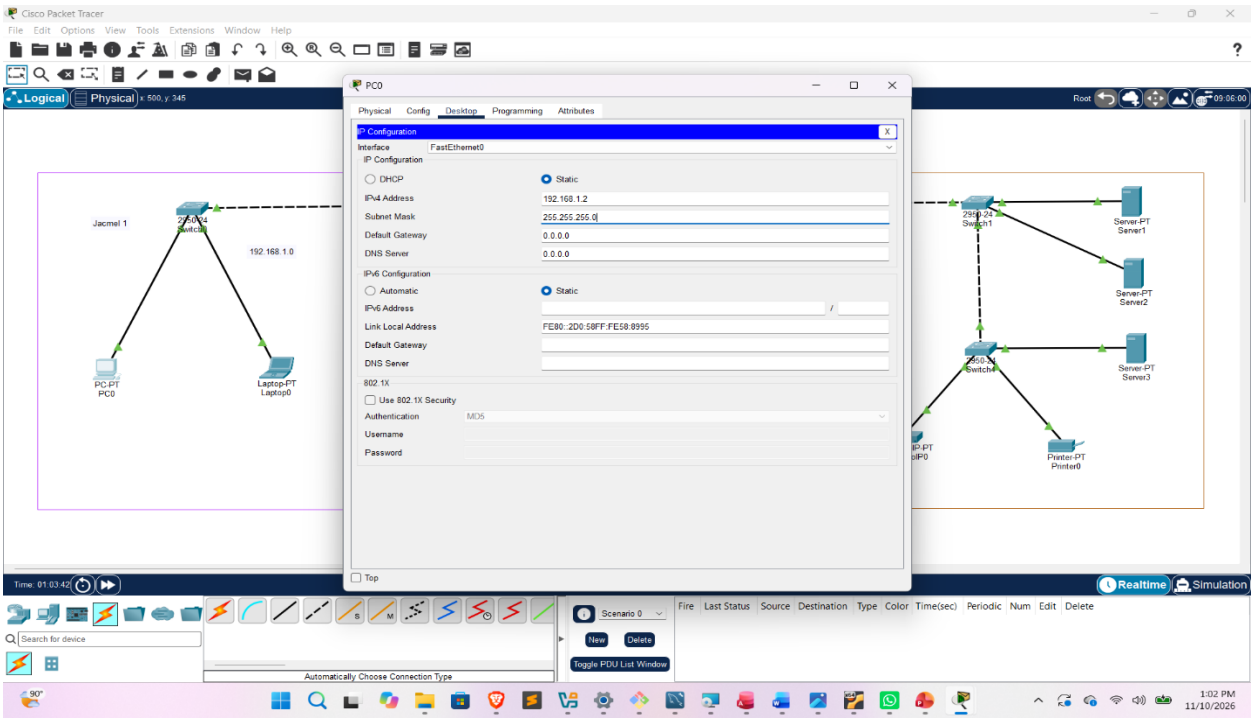
## Démarche suivie

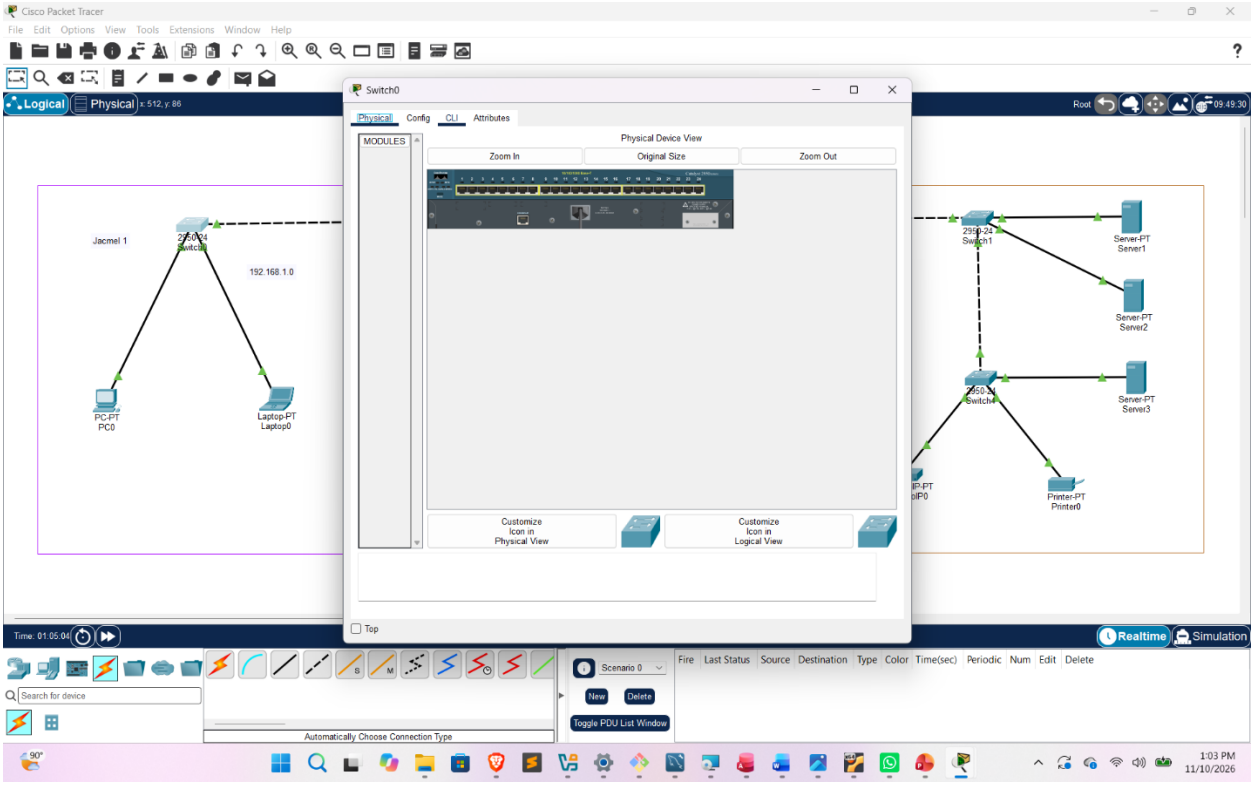
- Création de la topologie sur Cisco Packet Tracer.
- Configuration des switchs et du routeur.
- Attribution des adresses IP aux équipements.
- Vérification de la connectivité avec la commande "ping".
- Observation des échanges en Mode Simulation.
- Réalisation des captures d'écran des résultats.

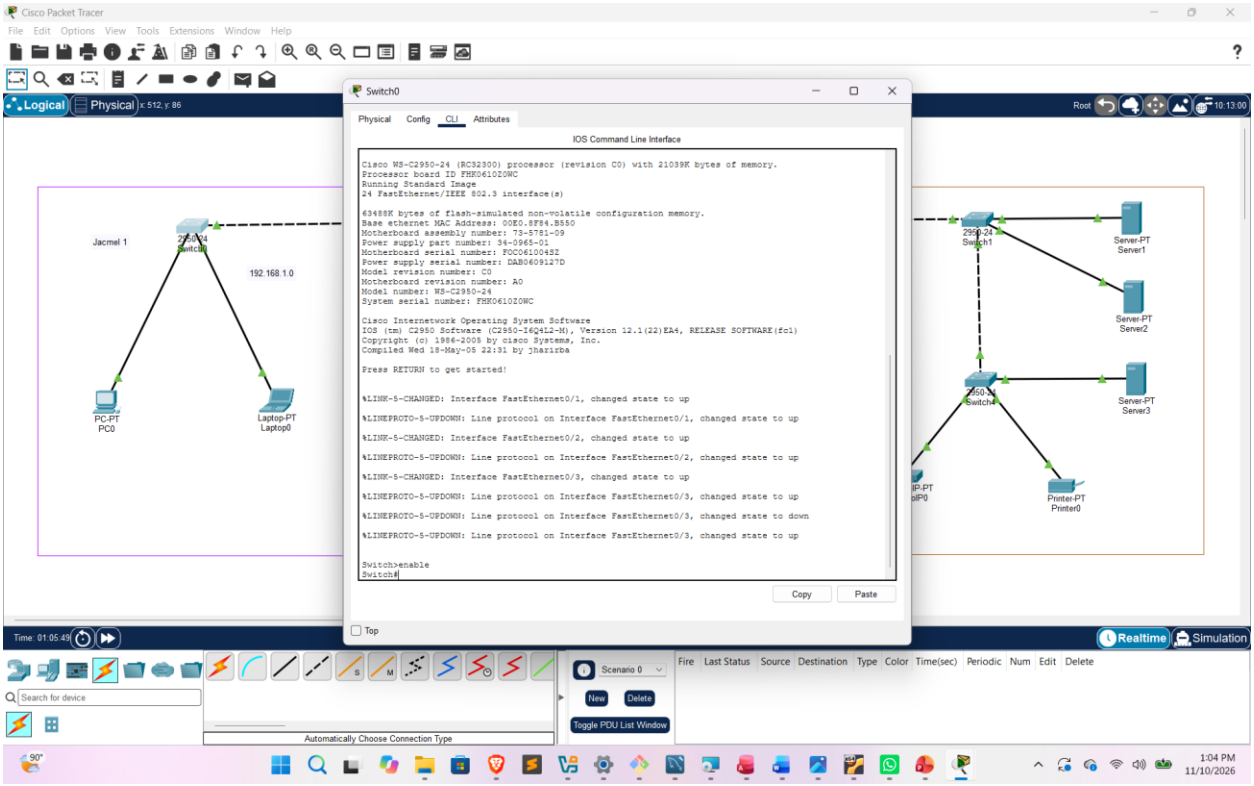
# Exercice 1

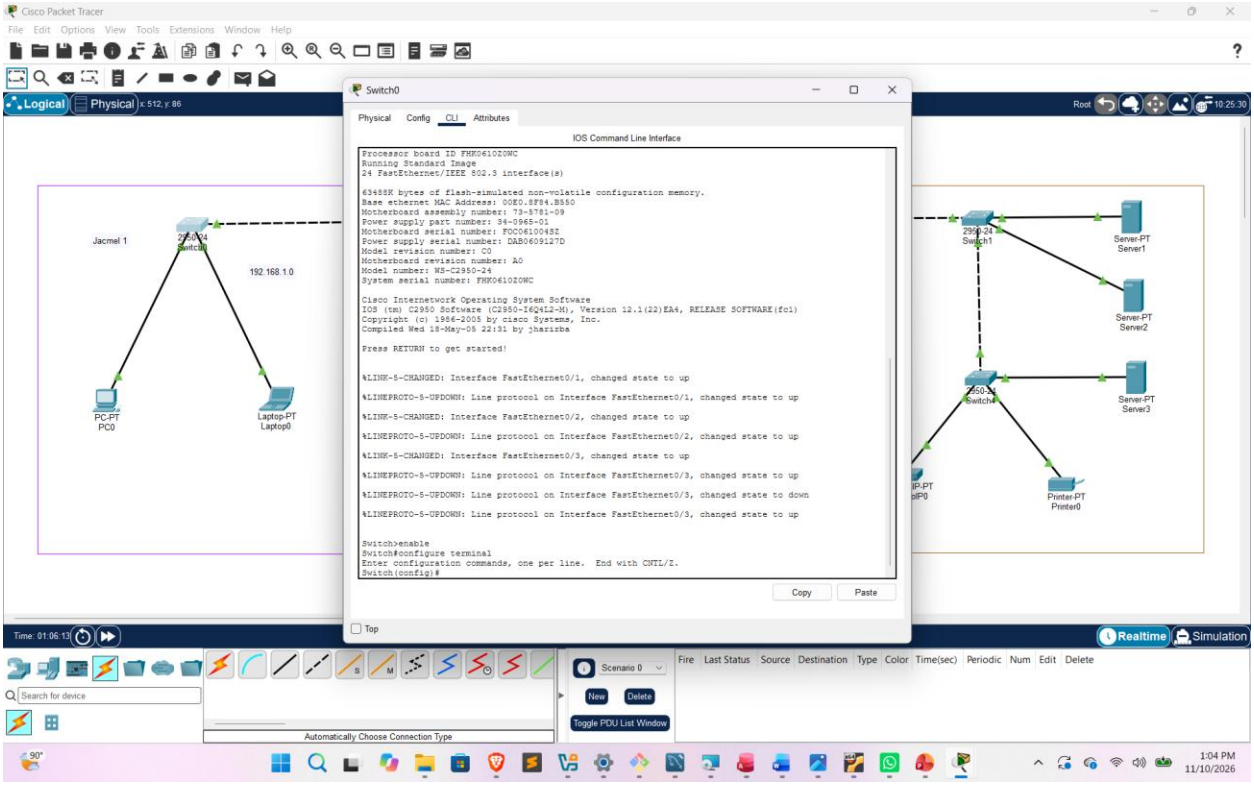
Reproduisez cette topologie en configurant les switchs, puis en attribuant les adresses IP aux dispositifs. Utilisez soit IPv4, soit IPv6, et testez la connectivité des deux VLAN à l'aide de la commande ping et du mode de simulation.

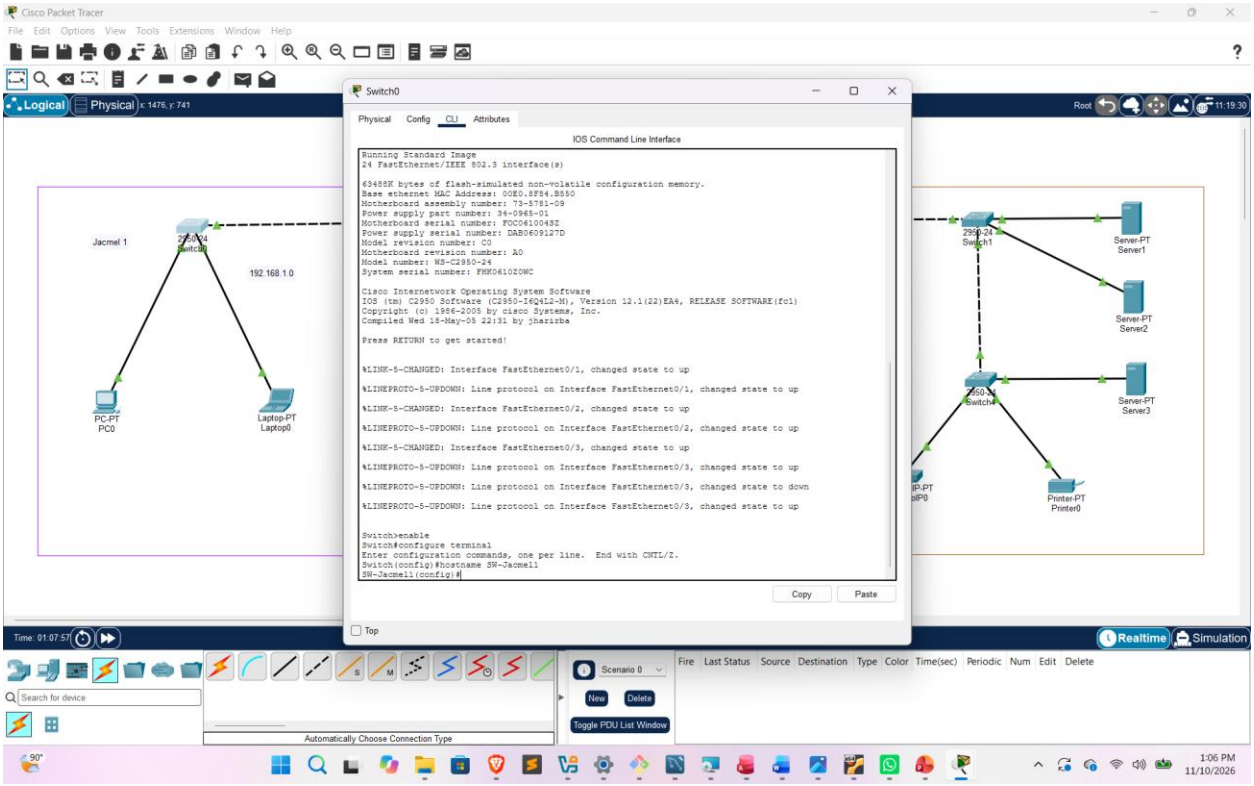


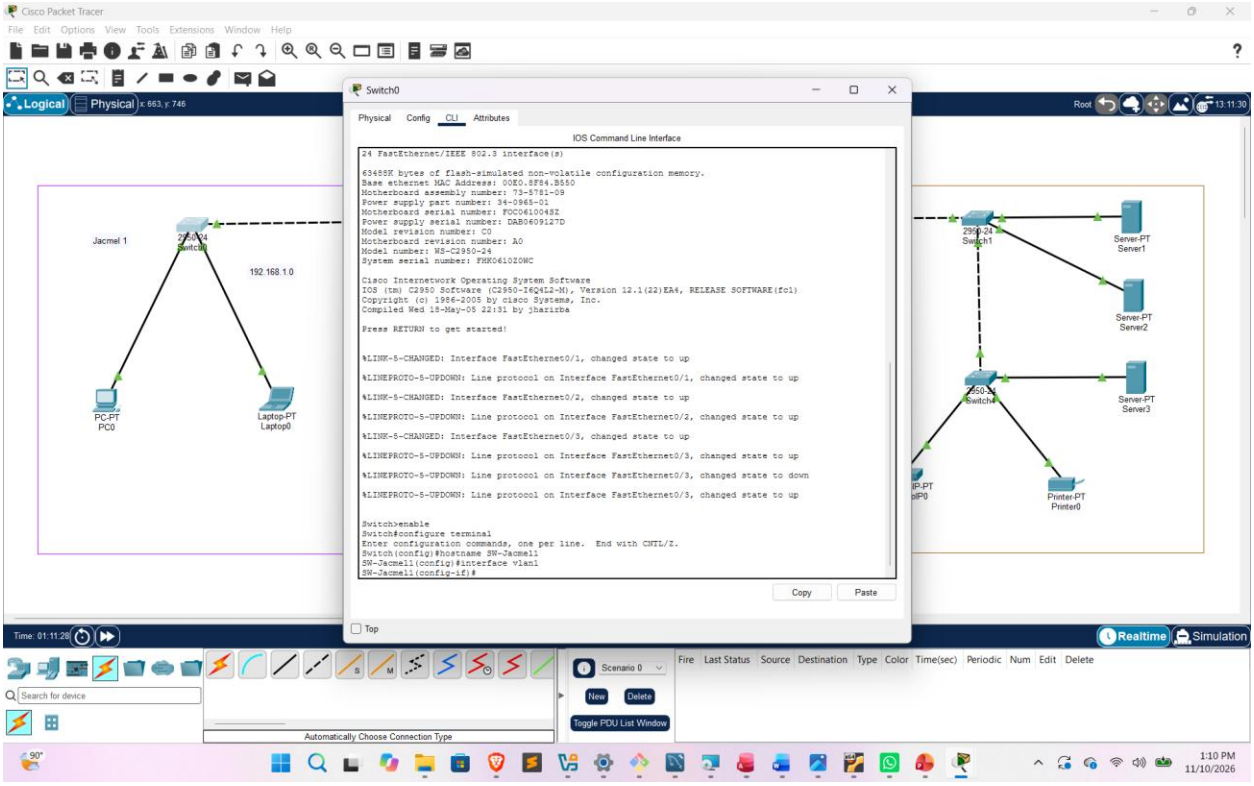



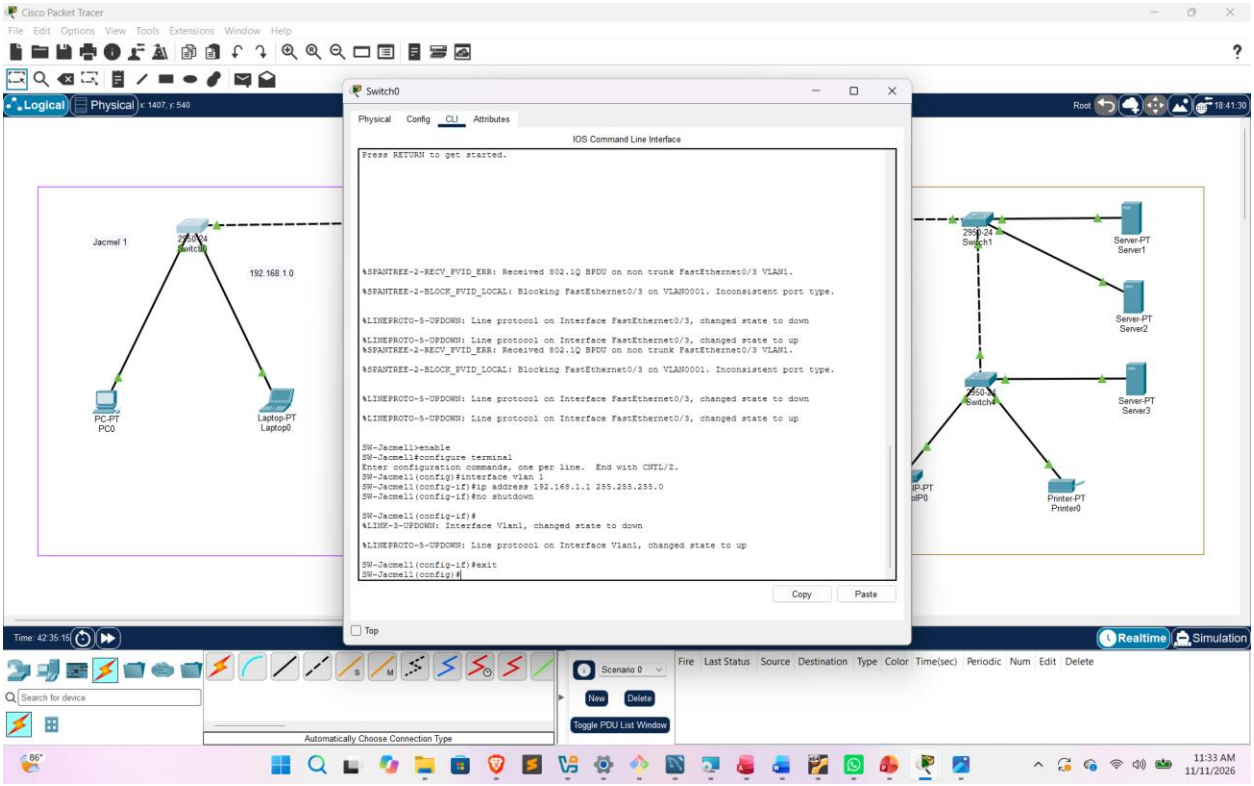

Cisco Packet Tracer
Switch0
Physical
Config
CLI
Attributes
MODULES
Physical Device View
Zoom In
Original Size
Zoom Out
Customize Icon in Physical View
Customize Icon in Logical View
Top
Jacmel 1
192.168.1.0
PC-PT PC0
Laptop-PT Laptop0
Server-PT Server1
Server-PT Server2
Server-PT Server3
Printer-PT Printer0
Realtime
Simulation
Scenario 0
New
Delete
Toggle PDU List Window
Automatically Choose Connection Type

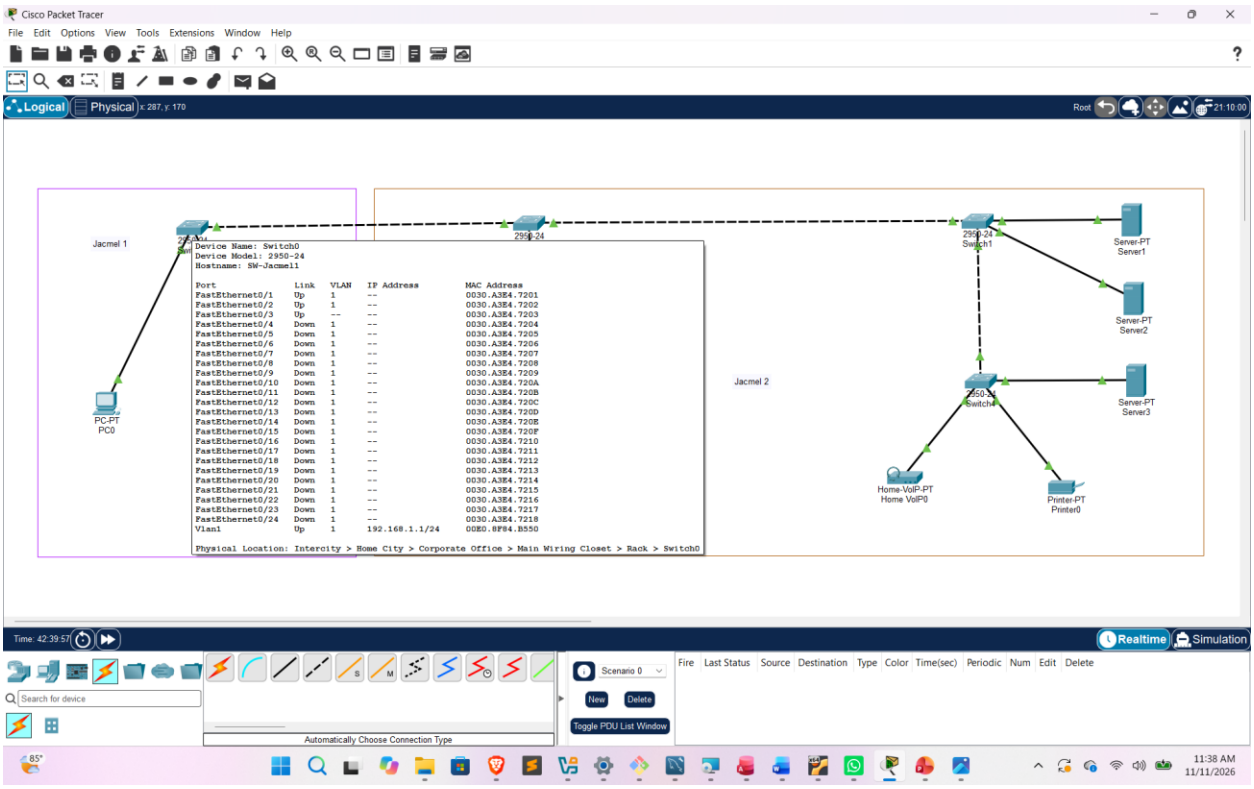

Cisco Packet Tracer
Switch0
Physical
Config
CLI
Attributes
IOS Command Line Interface
Cisco WS-C2950-24 (RC32300) processor (revision C0) with 21039K bytes of memory.
Processor board ID FHK0610Z0WC
Running Standard Image
24 FastEthernet/IEEE 802.3 interface(s)
63488K bytes of flash-simulated non-volatile configuration memory.
Base ethernet MAC Address: 00E0.8F84.B550
Motherboard assembly number: 73-5781-09
Power supply part number: 34-0965-01
Motherboard serial number: FOC06120458Z
Power supply serial number: DAB0609127D
Model revision number: C0
Motherboard revision number: A0
Model number: WS-C2950-24
System serial number: FHK0610Z0WC
Cisco Internetwork Operating System Software
IOS (tm) C2950 Software (C2950-I6Q4L2-M), Version 12.1(22)EA4, RELEASE SOFTWARE(fc1)
Copyright (c) 1986-2008 by cisco Systems, Inc.
Compiled Wed 18-May-05 22:31 by jharirba
Press RETURN to get started!
%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/2, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/3, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
Switch>enable
Switch#
Copy
Paste
Top
Jacmel 1
192.168.1.0
PC-PT PC0
Laptop-PT Laptop0
Server-PT Server1
Server-PT Server2
Server-PT Server3
Printer-PT Printer0
Realtime
Simulation
Scenario 0
New
Delete
Toggle PDU List Window
Automatically Choose Connection Type

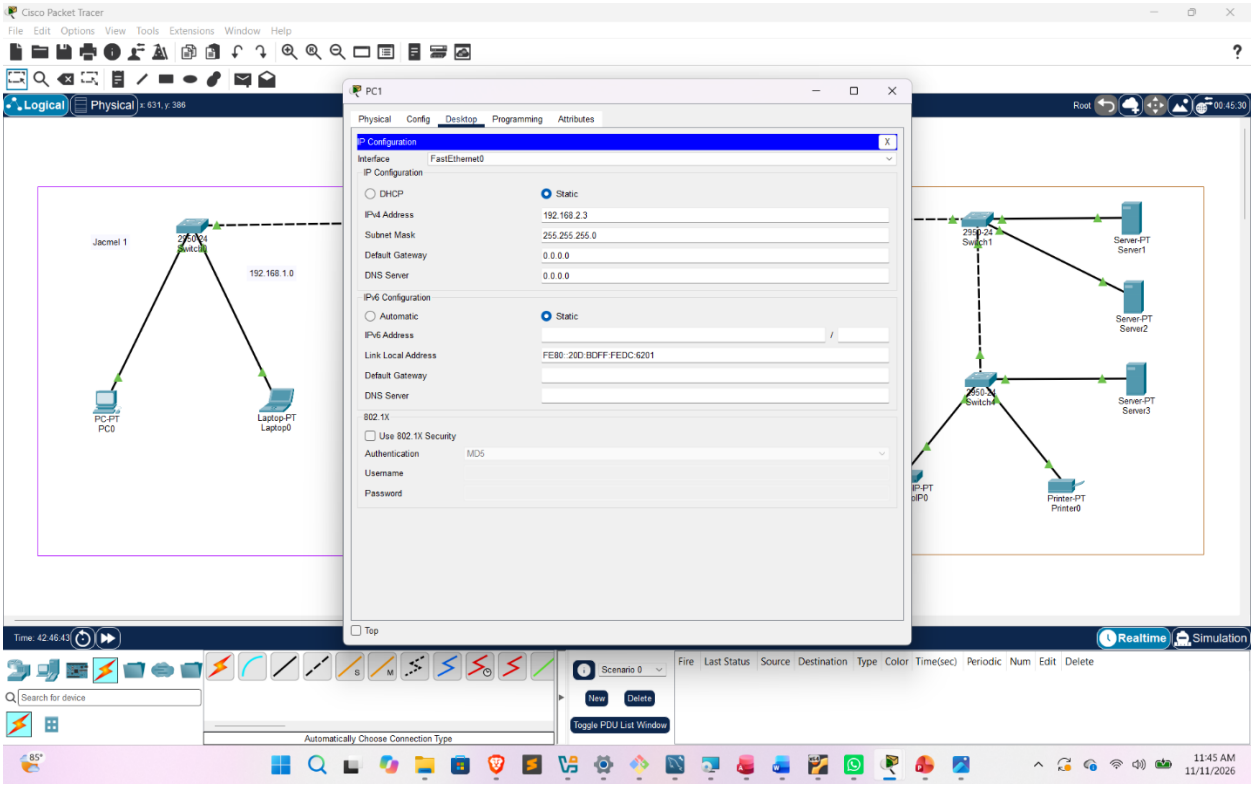

Cisco Packet Tracer
Switch0
Physical Config CLI Attributes
IOS Command Line Interface
Processor board ID FHK0610Z0WC
Running Standard Image
24 FastEthernet/IEEE 802.3 interface(s)
63488K bytes of flash-simulated non-volatile configuration memory.
Base ethernet MAC Address: 00E0.8F84.B550
Motherboard assembly number: 73-5781-09
Power supply part number: 34-0965-01
Motherboard serial number: FOC0610043Z
Power supply serial number: DAB0609127D
Model revision number: C0
Motherboard revision number: A0
Model number: WS-C2950-24
System serial number: FHK0610Z0WC
Cisco Internetwork Operating System Software
IOS (tm) C2950 Software (C2950-I6Q4L2-M), Version 12.1(22)EA4, RELEASE SOFTWARE(fc1)
Copyright (c) 1986-2005 by cisco Systems, Inc.
Compiled Wed 18-May-05 22:31 by jharirba
Press RETURN to get started!
%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/2, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/3, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
Switch>enable
Switch#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#
Copy
Paste
Top
Jacmel 1
192.168.1.0
PC-PT PC0
Laptop-PT Laptop0
Server-PT Server1
Server-PT Server2
Server-PT Server3
Printer-PT Printer0
Logical
Physical
Root
Realtime
Simulation
Scenario 0
New
Delete
Toggle PDU List Window
Automatically Choose Connection Type
1:04 PM
11/10/2026

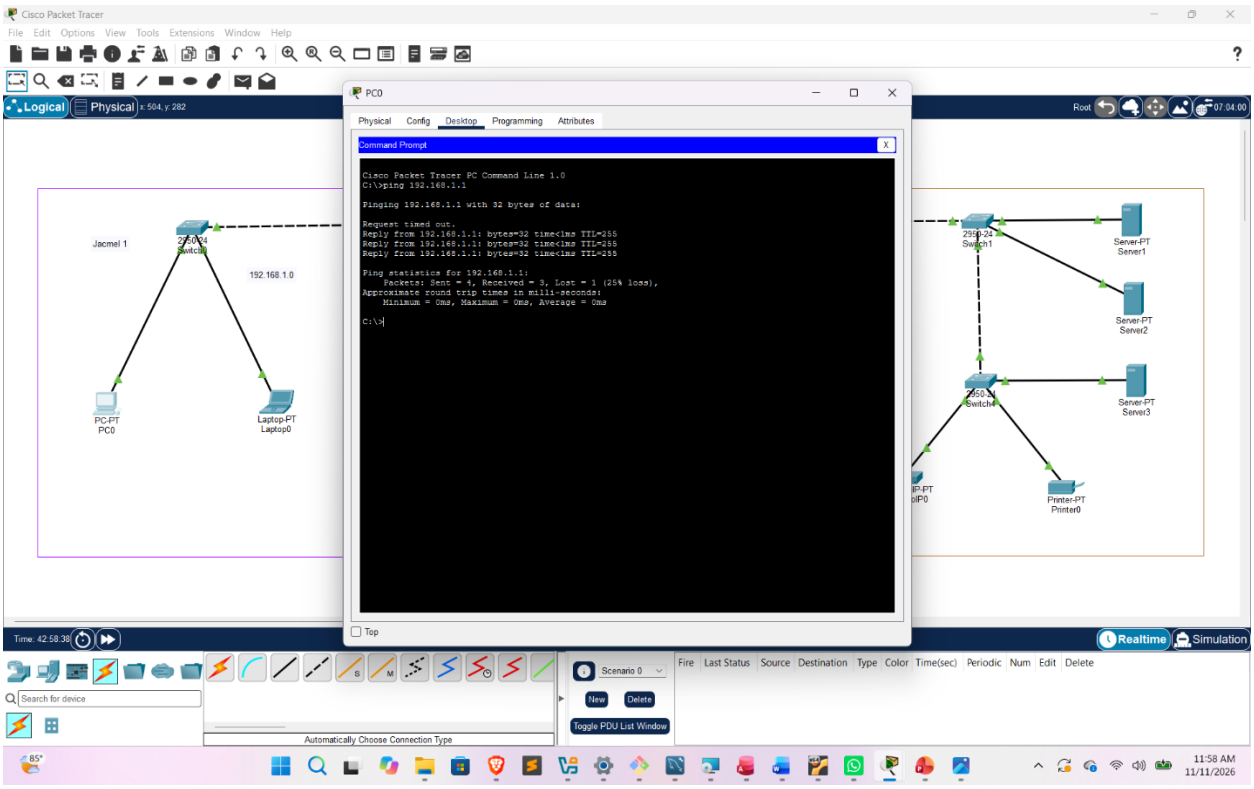

Cisco Packet Tracer
Switch0
Physical Config CLI Attributes
IOS Command Line Interface
Running Standard Image
24 FastEthernet/IEEE 802.3 interface(s)
63488K bytes of flash-simulated non-volatile configuration memory.
Base ethernet MAC Address: 00E0.8F84.B550
Motherboard assembly number: 73-5781-09
Power supply part number: 34-0965-01
Motherboard serial number: FOC0610043Z
Power supply serial number: DAB0609127D
Model revision number: C0
Motherboard revision number: A0
Model number: WS-C2950-24
System serial number: FHK0610Z0WC
Cisco Internetwork Operating System Software
IOS (tm) C2950 Software (C2950-I6Q4L2-M), Version 12.1(22)EA4, RELEASE SOFTWARE(fc1)
Copyright (c) 1986-2005 by cisco Systems, Inc.
Compiled Wed 18-May-05 22:31 by jharirba
Press RETURN to get started!
%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/2, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/3, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
Switch>enable
Switch#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#hostname SW-Jacmel1
SW-Jacmel1(config)#
Copy
Paste
Top
Jacmel 1
192.168.1.0
PC-PT PC0
Laptop-PT Laptop0
Server-PT Server1
Server-PT Server2
Server-PT Server3
Printer-PT Printer0
Logical
Physical
Root
Realtime
Simulation
Scenario 0
New
Delete
Toggle PDU List Window
Automatically Choose Connection Type
1:06 PM
11/10/2026

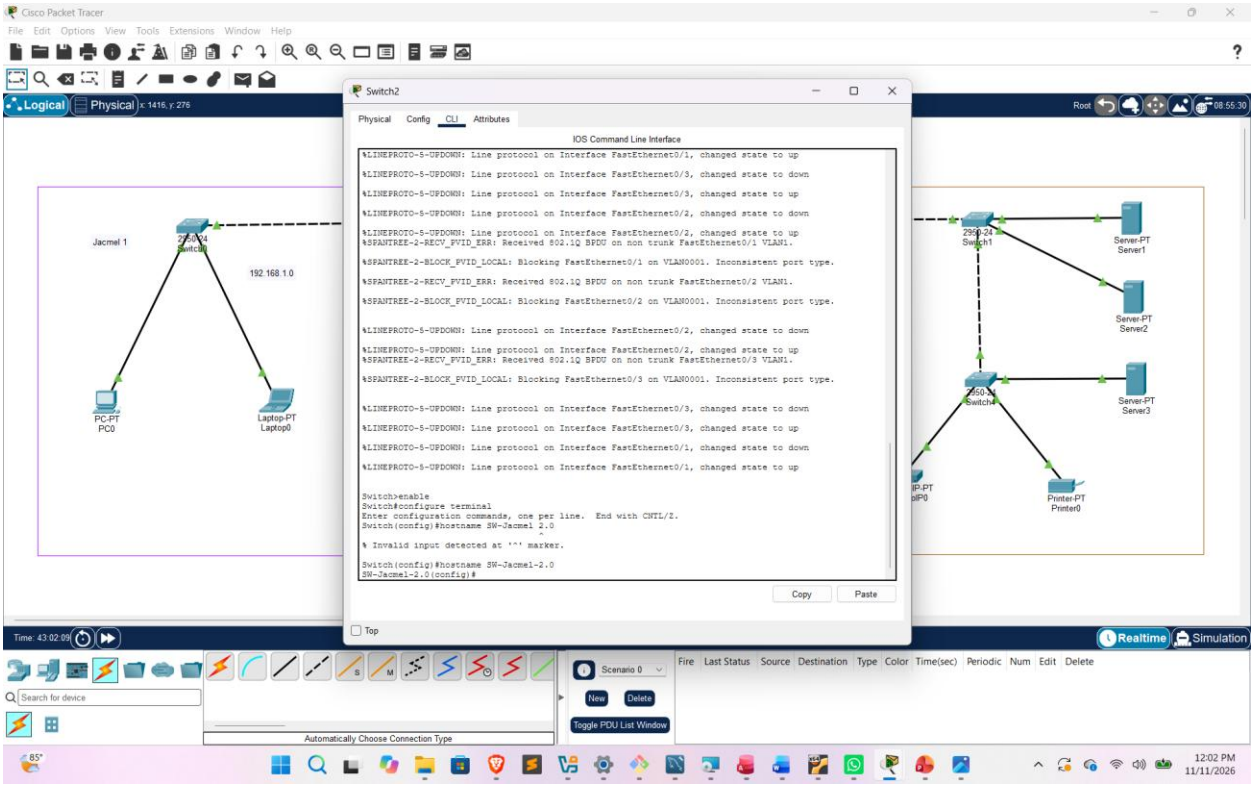

Cisco Packet Tracer
Switch0
Physical Config CLI Attributes
IOS Command Line Interface
24 FastEthernet/IEEE 802.3 interface(s)
63488K bytes of flash-simulated non-volatile configuration memory.
Base ethernet MAC Address: 00E0.8F84.B550
Motherboard assembly number: 73-5781-09
Power supply part number: 34-0965-01
Motherboard serial number: FOC0612048Z
Power supply serial number: DAB0609127D
Model revision number: C0
Motherboard revision number: A0
Model number: WS-C2950-24
System serial number: FHK0610Z0WC
Cisco Internetwork Operating System Software
IOS (tm) C2950 Software (C2950-I6Q4L2-M), Version 12.1(22)EA6, RELEASE SOFTWARE(fc1)
Copyright (c) 1986-2005 by cisco Systems, Inc.
Compiled Wed 18-May-05 22:31 by jharirba
Press RETURN to get started!
%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/2, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/3, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
Switch>enable
Switch#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#hostname SW-Jacmell
SW-Jacmell(config)#interface vlan1
SW-Jacmell(config-if)#
Copy
Paste
Top
Jacmel 1
192.168.1.0
PC-PT PC0
Laptop-PT Laptop0
Server-PT Server1
Server-PT Server2
Server-PT Server3
Printer-PT Printer0
Logical
Physical
Root
Realtime
Simulation
Scenario 0
New
Delete
Toggle PDU List Window
Automatically Choose Connection Type
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
1:10 PM
11/10/2026

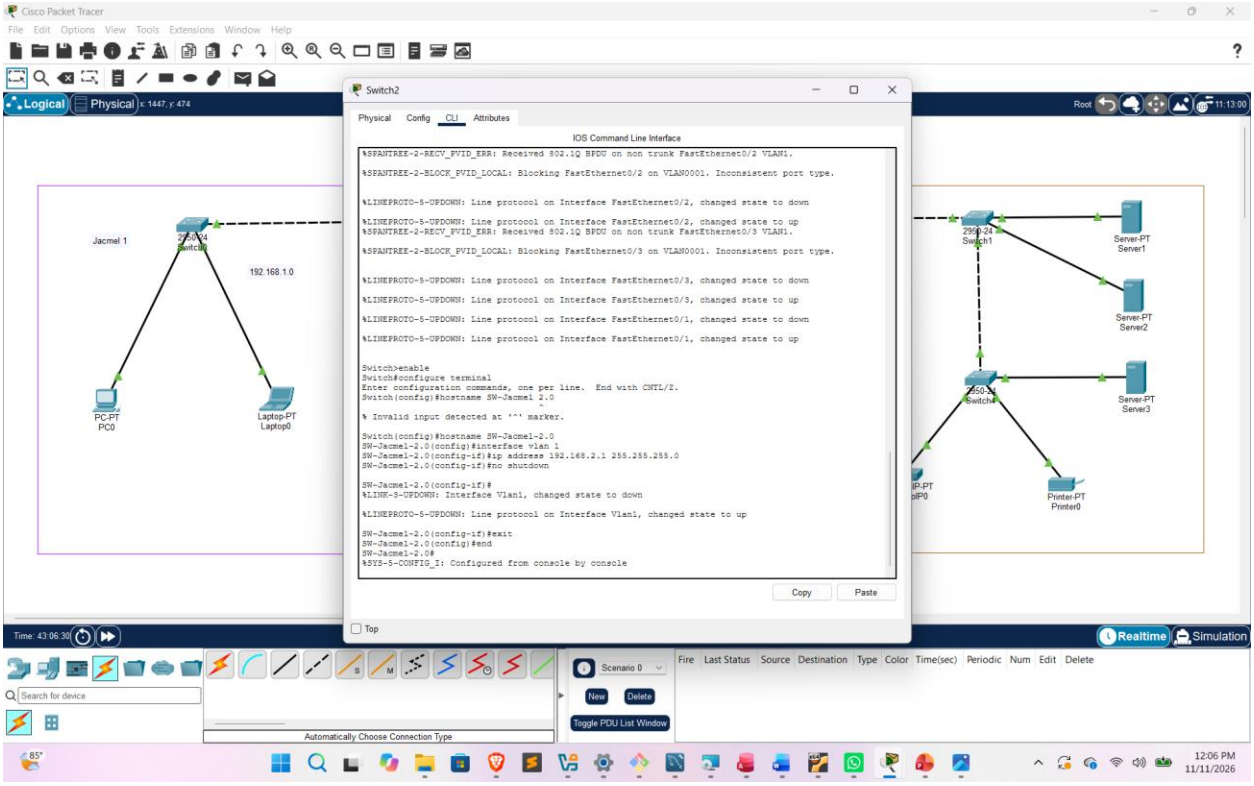

Cisco Packet Tracer
Switch0
Physical Config CLI Attributes
IOS Command Line Interface
Press RETURN to get started.
%SPANTREE-2-RECV_PVID_ERR: Received 802.1Q BPDU on non trunk FastEthernet0/3 VLAN1.
%SPANTREE-2-BLOCK_PVID_LOCAL: Blocking FastEthernet0/3 on VLAN0001. Inconsistent port type.
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
%SPANTREE-2-RECV_PVID_ERR: Received 802.1Q BPDU on non trunk FastEthernet0/3 VLAN1.
%SPANTREE-2-BLOCK_PVID_LOCAL: Blocking FastEthernet0/3 on VLAN0001. Inconsistent port type.
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
SW-Jacmell>enable
SW-Jacmell#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
SW-Jacmell(config)#interface vlan 1
SW-Jacmell(config-if)#ip address 192.168.1.1 255.255.255.0
SW-Jacmell(config-if)#no shutdown
SW-Jacmell(config-if)#
%LINK-3-UPDOWN: Interface Vlan1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan1, changed state to up
SW-Jacmell(config-if)#exit
SW-Jacmell(config)#
Copy
Paste
Top
Jacmel 1
192.168.1.0
PC-PT PC0
Laptop-PT Laptop0
Server-PT Server1
Server-PT Server2
Server-PT Server3
Printer-PT Printer0
Logical
Physical
Root
Realtime
Simulation
Scenario 0
New
Delete
Toggle PDU List Window
Automatically Choose Connection Type
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
11:33 AM
11/11/2026

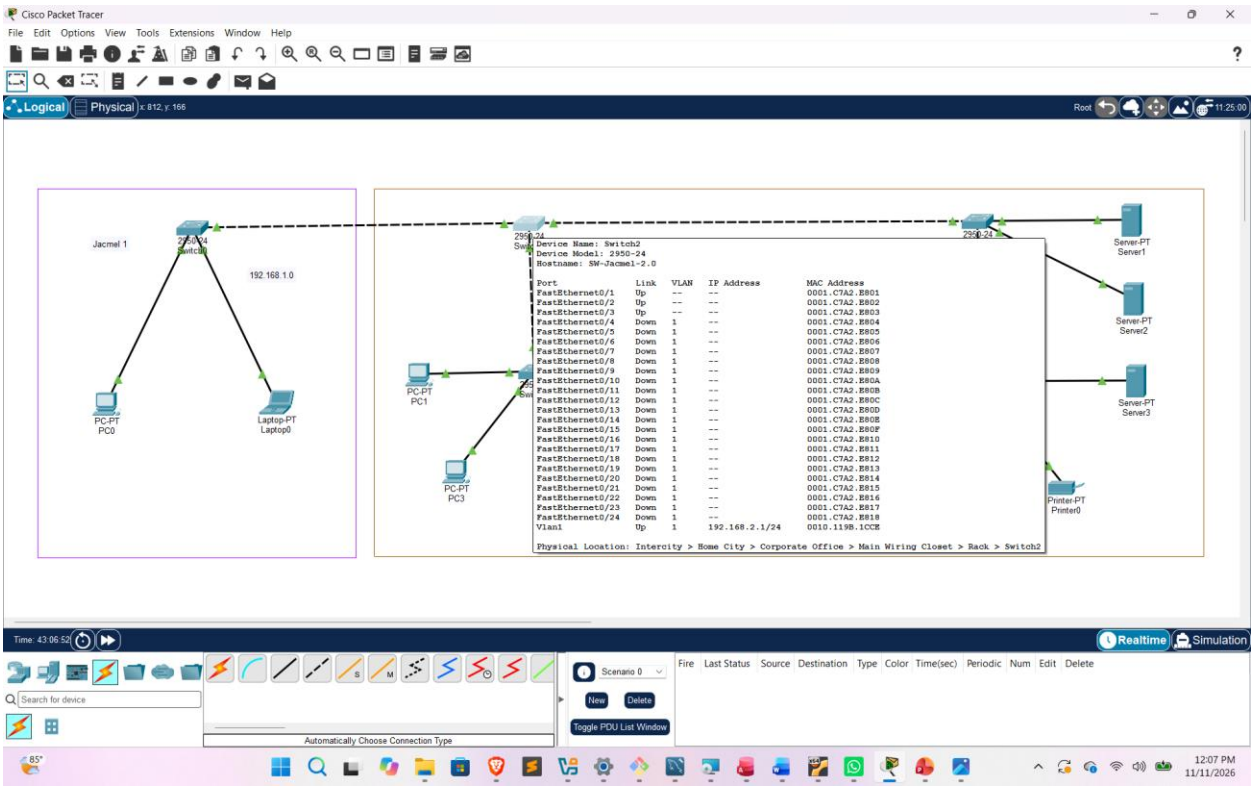

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
Jacmel 1
Jacmel 2
Device Name: Switch0
Device Model: 2950-24
Hostname: SW-Jacmel1
Port Link VLAN IP Address MAC Address
FastEthernet0/1 Up 1 -- 0030.A3E4.7201
FastEthernet0/2 Up 1 -- 0030.A3E4.7202
FastEthernet0/3 Up -- -- 0030.A3E4.7203
FastEthernet0/4 Down 1 -- 0030.A3E4.7204
FastEthernet0/5 Down 1 -- 0030.A3E4.7205
FastEthernet0/6 Down 1 -- 0030.A3E4.7206
FastEthernet0/7 Down 1 -- 0030.A3E4.7207
FastEthernet0/8 Down 1 -- 0030.A3E4.7208
FastEthernet0/9 Down 1 -- 0030.A3E4.7209
FastEthernet0/10 Down 1 -- 0030.A3E4.720A
FastEthernet0/11 Down 1 -- 0030.A3E4.720B
FastEthernet0/12 Down 1 -- 0030.A3E4.720C
FastEthernet0/13 Down 1 -- 0030.A3E4.720D
FastEthernet0/14 Down 1 -- 0030.A3E4.720E
FastEthernet0/15 Down 1 -- 0030.A3E4.720F
FastEthernet0/16 Down 1 -- 0030.A3E4.7210
FastEthernet0/17 Down 1 -- 0030.A3E4.7211
FastEthernet0/18 Down 1 -- 0030.A3E4.7212
FastEthernet0/19 Down 1 -- 0030.A3E4.7213
FastEthernet0/20 Down 1 -- 0030.A3E4.7214
FastEthernet0/21 Down 1 -- 0030.A3E4.7215
FastEthernet0/22 Down 1 -- 0030.A3E4.7216
FastEthernet0/23 Down 1 -- 0030.A3E4.7217
FastEthernet0/24 Down 1 -- 0030.A3E4.7218
Vlan1 Up 1 192.168.1.1/24 00E0.8F84.B550
Physical Location: Intercity > Home City > Corporate Office > Main Wiring Closet > Rack > Switch0
PC-PT PC0
Server-PT Server1
Server-PT Server2
Server-PT Server3
Home-VoIP-PT Home VoIP0
Printer-PT Printer0
Realtime Simulation
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
Automatically Choose Connection Type
11:38 AM 11/11/2026

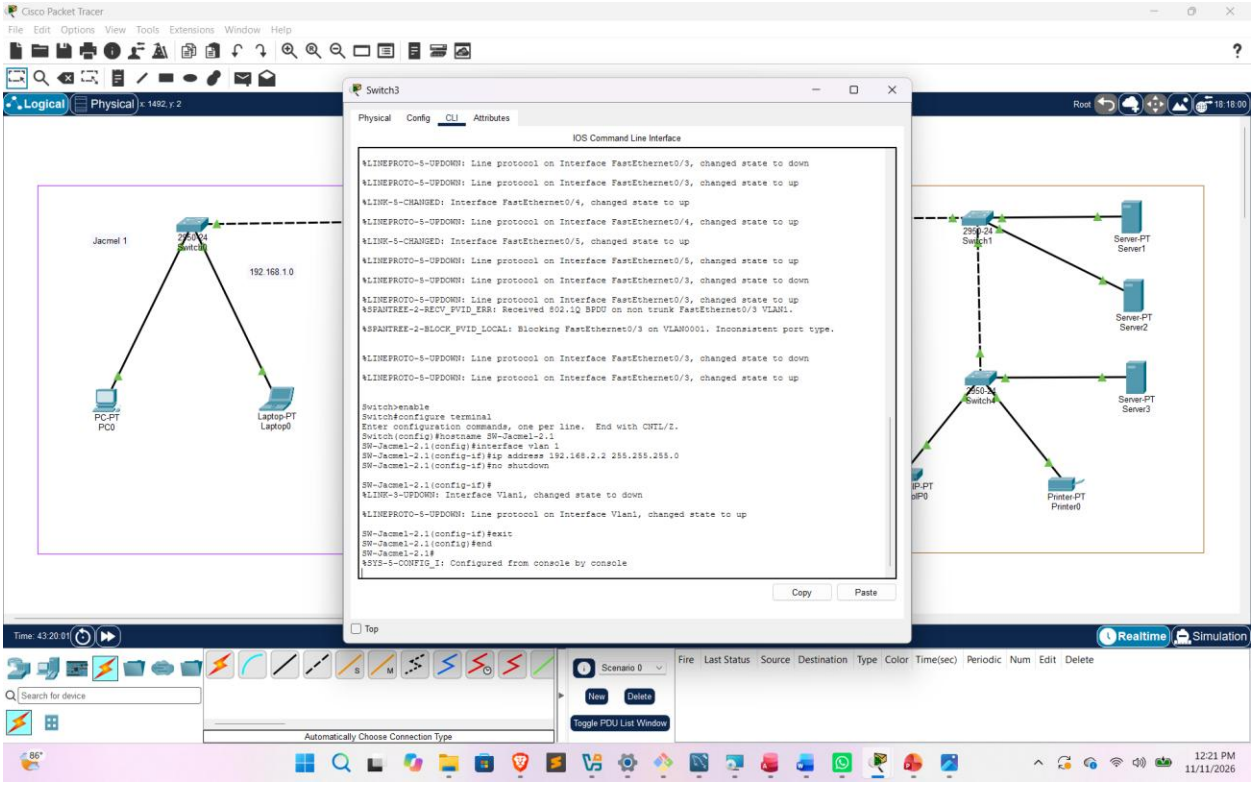

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
PC1
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
IP Configuration
DHCP Static
IPv4 Address 192.168.2.3
Subnet Mask 255.255.255.0
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic Static
IPv6 Address
Link Local Address FE80::20D:BDFF:FEDC:6201
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top
Jacmel 1
192.168.1.0
PC-PT PC0
Laptop-PT Laptop0
Server-PT Server1
Server-PT Server2
Server-PT Server3
Printer-PT Printer0
Realtime Simulation
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
Automatically Choose Connection Type
11:45 AM 11/11/2026

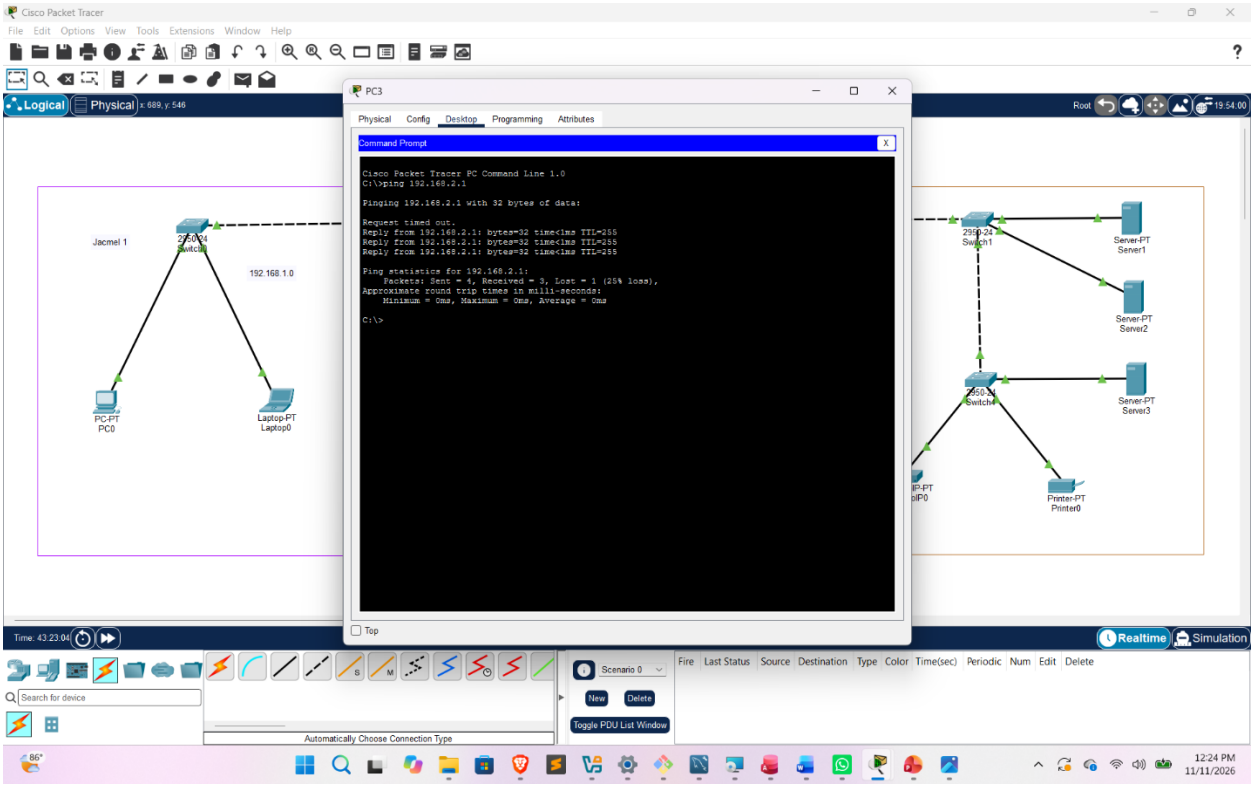

Cisco Packet Tracer
PC0
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.1
Pinging 192.168.1.1 with 32 bytes of data:
Request timed out.
Reply from 192.168.1.1: bytes=32 time<1ms TTL=255
Reply from 192.168.1.1: bytes=32 time<1ms TTL=255
Reply from 192.168.1.1: bytes=32 time<1ms TTL=255
Ping statistics for 192.168.1.1:
Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>
Top
Logical Physical
Root
Jacmel 1
192.168.1.0
PC-PT PC0
Laptop-PT Laptop0
Server-PT Server1
Server-PT Server2
Server-PT Server3
Printer-PT Printer0
Realtime Simulation
Scenario 0
New Delete
Toggle PDU List Window
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
Automatically Choose Connection Type
11:58 AM
11/11/2026

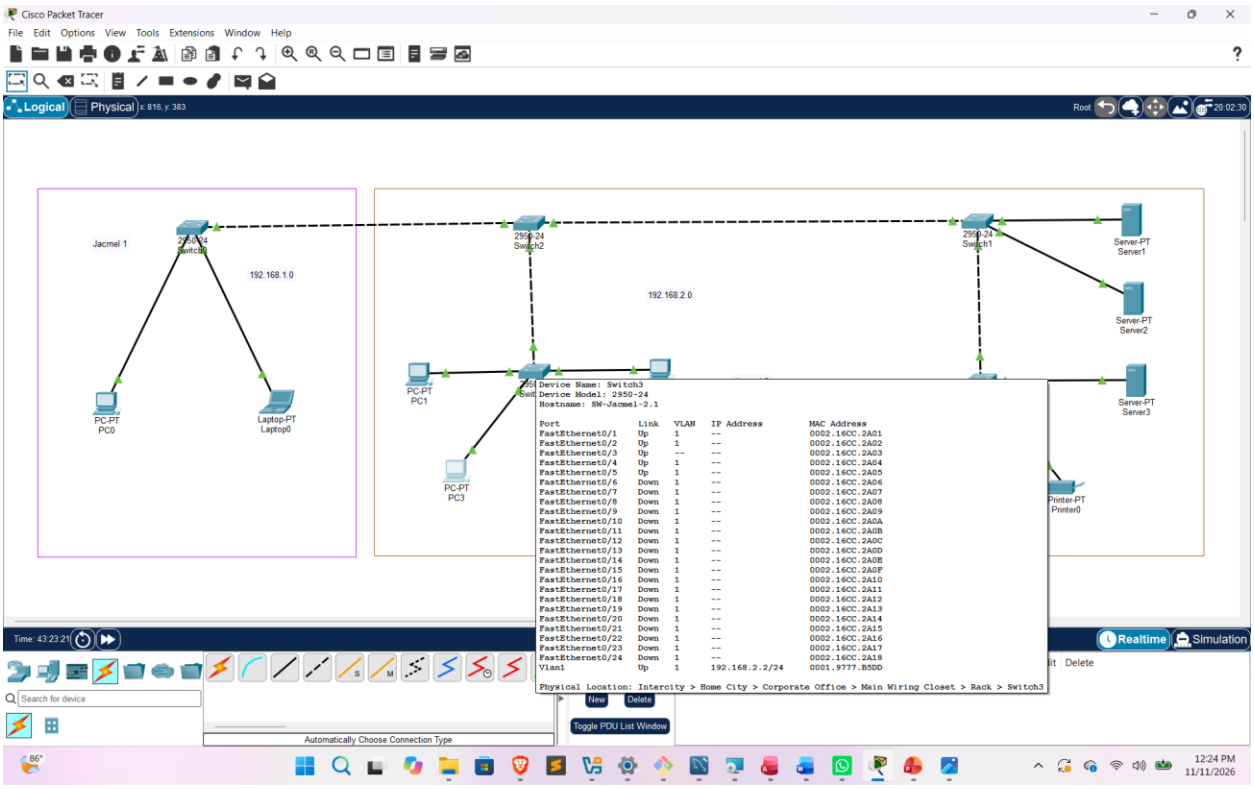

Cisco Packet Tracer
Switch2
Physical Config CLI Attributes
IOS Command Line Interface
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up
%SPANTREE-2-RECV_PVID_ERR: Received 802.1Q BPDU on non trunk FastEthernet0/1 VLAN1.
%SPANTREE-2-BLOCK_PVID_LOCAL: Blocking FastEthernet0/1 on VLAN0001. Inconsistent port type.
%SPANTREE-2-RECV_PVID_ERR: Received 802.1Q BPDU on non trunk FastEthernet0/2 VLAN1.
%SPANTREE-2-BLOCK_PVID_LOCAL: Blocking FastEthernet0/2 on VLAN0001. Inconsistent port type.
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up
%SPANTREE-2-RECV_PVID_ERR: Received 802.1Q BPDU on non trunk FastEthernet0/3 VLAN1.
%SPANTREE-2-BLOCK_PVID_LOCAL: Blocking FastEthernet0/3 on VLAN0001. Inconsistent port type.
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
Switch>enable
Switch#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#hostname SW-Jacmel 2.0
% Invalid input detected at '^' marker.
Switch(config)#hostname SW-Jacmel-2.0
SW-Jacmel-2.0(config)#
Copy Paste
Top
Logical Physical
Root
Jacmel 1
192.168.1.0
PC-PT PC0
Laptop-PT Laptop0
Server-PT Server1
Server-PT Server2
Server-PT Server3
Printer-PT Printer0
Realtime Simulation
Scenario 0
New Delete
Toggle PDU List Window
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
Automatically Choose Connection Type
12:02 PM
11/11/2026

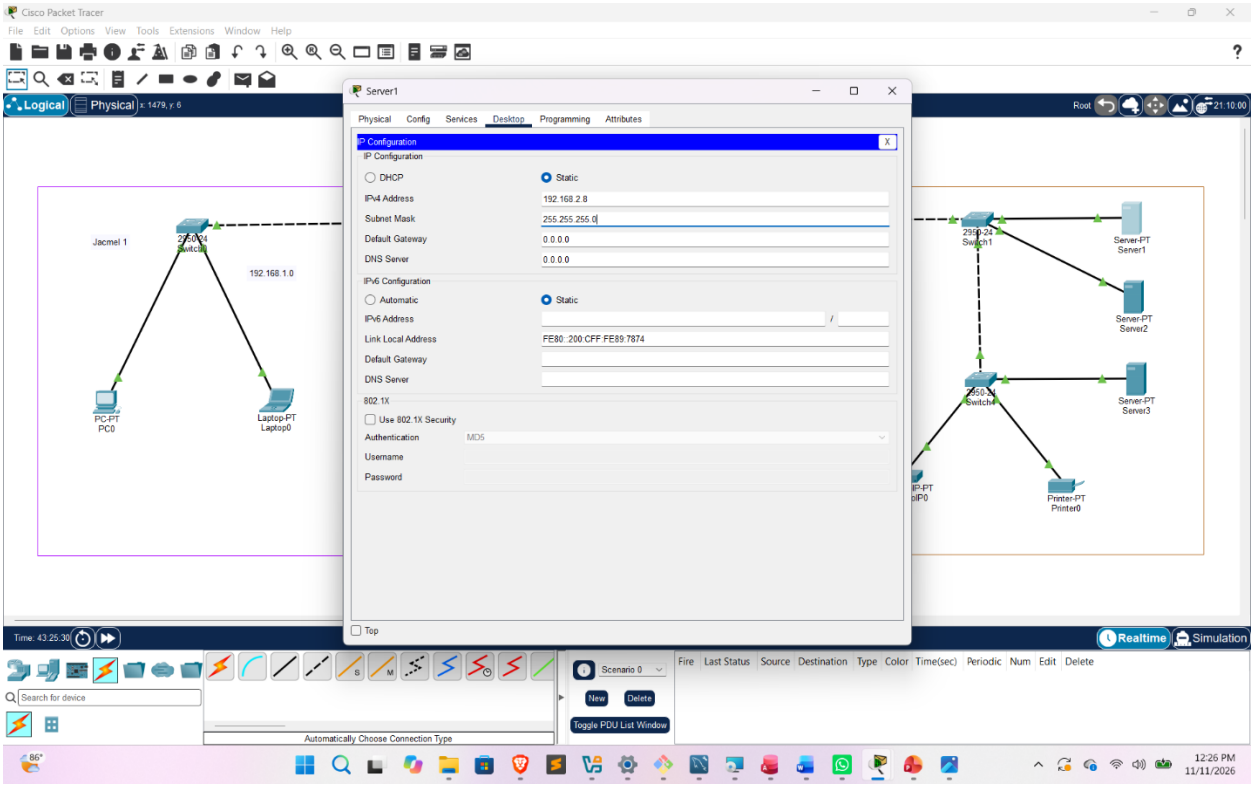

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
Switch2
Physical Config CLI Attributes
IOS Command Line Interface
%SPANTREE-2-RECV_PVID_ERR: Received 802.1Q BPDU on non trunk FastEthernet0/2 VLAN1.
%SPANTREE-2-BLOCK_PVID_LOCAL: Blocking FastEthernet0/2 on VLAN0001. Inconsistent port type.
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up
%SPANTREE-2-RECV_PVID_ERR: Received 802.1Q BPDU on non trunk FastEthernet0/3 VLAN1.
%SPANTREE-2-BLOCK_PVID_LOCAL: Blocking FastEthernet0/3 on VLAN0001. Inconsistent port type.
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
Switch>enable
Switch#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#hostname SW-Jacmel-2.0
% Invalid input detected at '^' marker.
Switch(config)#hostname SW-Jacmel-2.0
SW-Jacmel-2.0(config)#interface vlan 1
SW-Jacmel-2.0(config-if)#ip address 192.168.2.1 255.255.255.0
SW-Jacmel-2.0(config-if)#no shutdown
SW-Jacmel-2.0(config-if)#
%LINK-5-UPDOWN: Interface Vlan1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan1, changed state to up
SW-Jacmel-2.0(config-if)#exit
SW-Jacmel-2.0(config)#end
SW-Jacmel-2.0#
%SYS-5-CONFIG_I: Configured from console by console
Copy Paste
Top
Jacmel 1
192.168.1.0
PC-PT PC0
Laptop-PT Laptop0
Server-PT Server1
Server-PT Server2
Server-PT Server3
Printer-PT Printer0
Realtime Simulation
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
Automatically Choose Connection Type
12:06 PM 11/11/2026

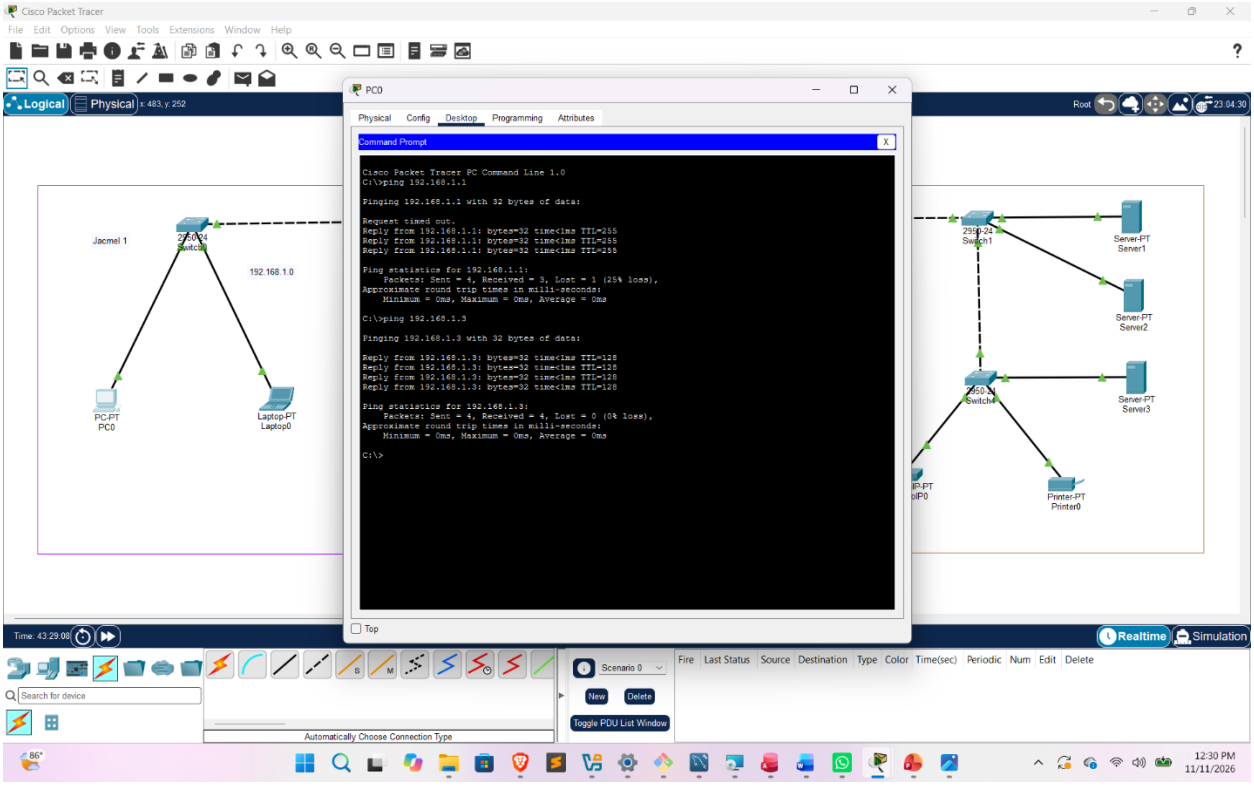

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
Device Name: Switch2
Device Model: 2950-24
Hostname: SW-Jacmel-2.0
Port Link VLAN IP Address MAC Address
FastEthernet0/1 Up -- -- 0001.C7A2.E801
FastEthernet0/2 Up -- -- 0001.C7A2.E802
FastEthernet0/3 Up -- -- 0001.C7A2.E803
FastEthernet0/4 Down 1 -- 0001.C7A2.E804
FastEthernet0/5 Down 1 -- 0001.C7A2.E805
FastEthernet0/6 Down 1 -- 0001.C7A2.E806
FastEthernet0/7 Down 1 -- 0001.C7A2.E807
FastEthernet0/8 Down 1 -- 0001.C7A2.E808
FastEthernet0/9 Down 1 -- 0001.C7A2.E809
FastEthernet0/10 Down 1 -- 0001.C7A2.E80A
FastEthernet0/11 Down 1 -- 0001.C7A2.E80B
FastEthernet0/12 Down 1 -- 0001.C7A2.E80C
FastEthernet0/13 Down 1 -- 0001.C7A2.E80D
FastEthernet0/14 Down 1 -- 0001.C7A2.E80E
FastEthernet0/15 Down 1 -- 0001.C7A2.E80F
FastEthernet0/16 Down 1 -- 0001.C7A2.E810
FastEthernet0/17 Down 1 -- 0001.C7A2.E811
FastEthernet0/18 Down 1 -- 0001.C7A2.E812
FastEthernet0/19 Down 1 -- 0001.C7A2.E813
FastEthernet0/20 Down 1 -- 0001.C7A2.E814
FastEthernet0/21 Down 1 -- 0001.C7A2.E815
FastEthernet0/22 Down 1 -- 0001.C7A2.E816
FastEthernet0/23 Down 1 -- 0001.C7A2.E817
FastEthernet0/24 Down 1 -- 0001.C7A2.E818
Vlan1 Up 1 192.168.2.1/24 0010.119B.1CCE
Physical Location: Intercity > Home City > Corporate Office > Main Wiring Closet > Rack > Switch2
Jacmel 1
192.168.1.0
PC-PT PC0
PC-PT PC1
PC-PT PC3
Laptop-PT Laptop0
Server-PT Server1
Server-PT Server2
Server-PT Server3
Printer-PT Printer0
Realtime Simulation
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
Automatically Choose Connection Type
12:07 PM 11/11/2026

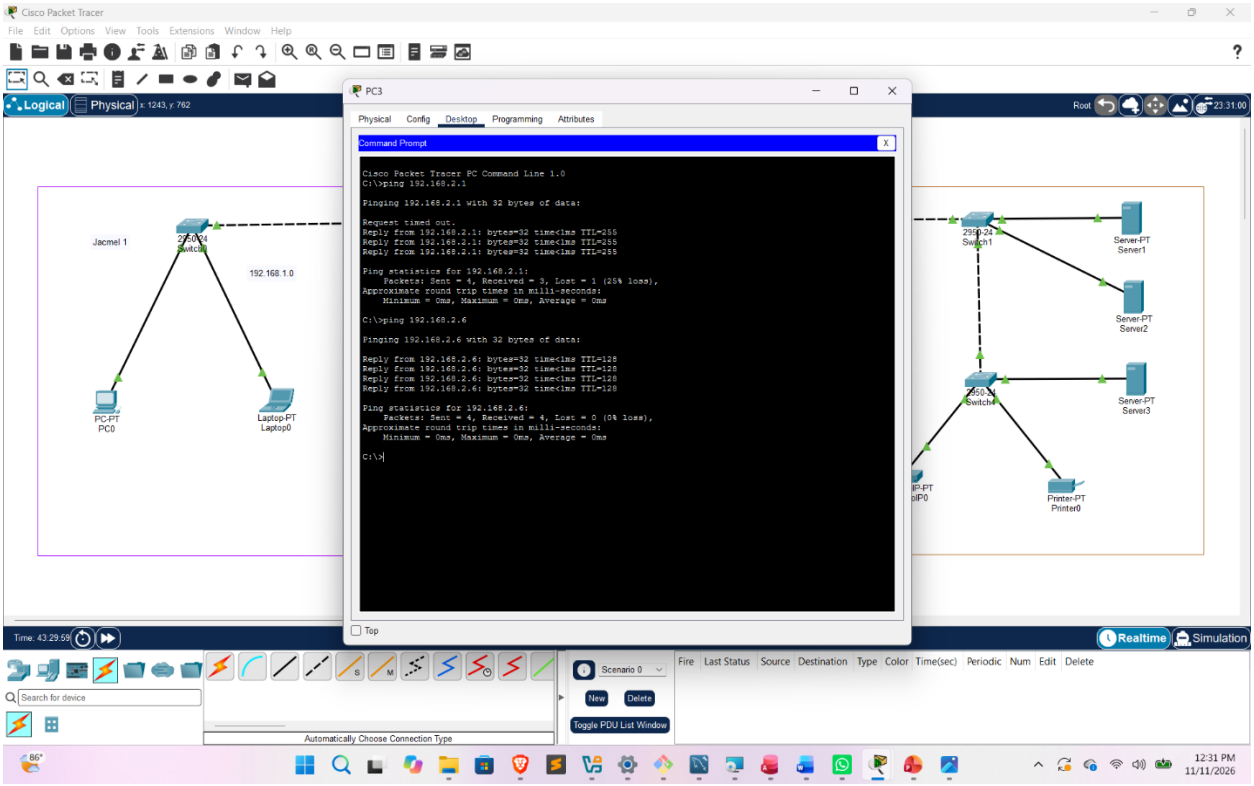

Cisco Packet Tracer
Switch3
Physical
Config
CLI
Attributes
IOS Command Line Interface
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/4, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/4, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/5, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/5, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
%SPANTREE-2-RECV_PVID_ERR: Received 802.1Q BPDU on non trunk FastEthernet0/3 VLAN1.
%SPANTREE-2-BLOCK_PVID_LOCAL: Blocking FastEthernet0/3 on VLAN0001. Inconsistent port type.
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
Switch>enable
Switch#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#hostname SW-Jacmel-2.1
SW-Jacmel-2.1(config)#interface vlan 1
SW-Jacmel-2.1(config-if)#ip address 192.168.2.2 255.255.255.0
SW-Jacmel-2.1(config-if)#no shutdown
SW-Jacmel-2.1(config-if)#
%LINK-5-UPDOWN: Interface Vlan1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan1, changed state to up
SW-Jacmel-2.1(config-if)#exit
SW-Jacmel-2.1(config)#end
SW-Jacmel-2.1#
%SYS-5-CONFIG_I: Configured from console by console
Copy
Paste
Top
Jacmel 1
192.168.1.0
PC-PT PC0
Laptop-PT Laptop0
Server-PT Server1
Server-PT Server2
Server-PT Server3
Printer-PT Printer0
Realtime
Simulation
Automatically Choose Connection Type
12:21 PM
11/11/2026

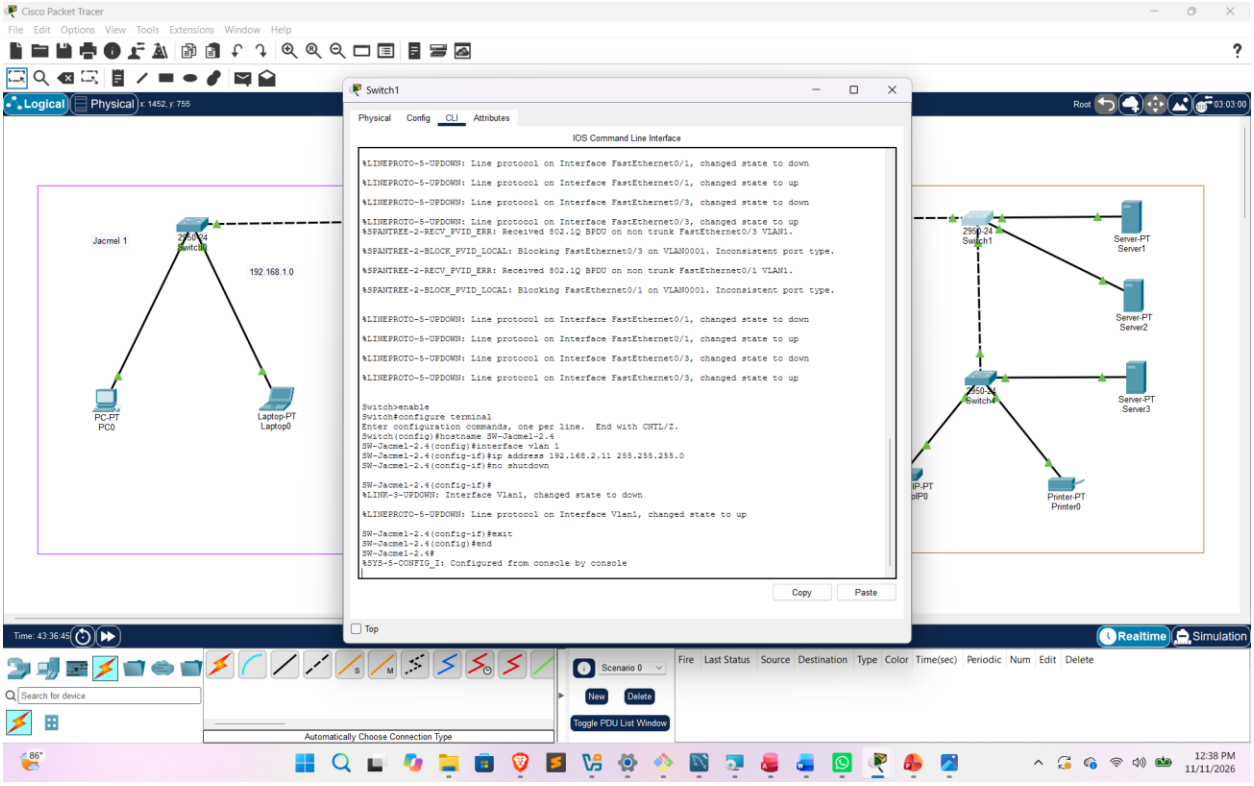

Cisco Packet Tracer
PC3
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.2.1
Pinging 192.168.2.1 with 32 bytes of data:
Request timed out.
Reply from 192.168.2.1: bytes=32 time<1ms TTL=255
Reply from 192.168.2.1: bytes=32 time<1ms TTL=255
Reply from 192.168.2.1: bytes=32 time<1ms TTL=255
Ping statistics for 192.168.2.1:
Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>
Top
Jacmel 1
192.168.1.0
PC-PT PC0
Laptop-PT Laptop0
Server-PT Server1
Server-PT Server2
Server-PT Server3
Printer-PT Printer0
Realtime
Simulation
Automatically Choose Connection Type
12:24 PM
11/11/2026

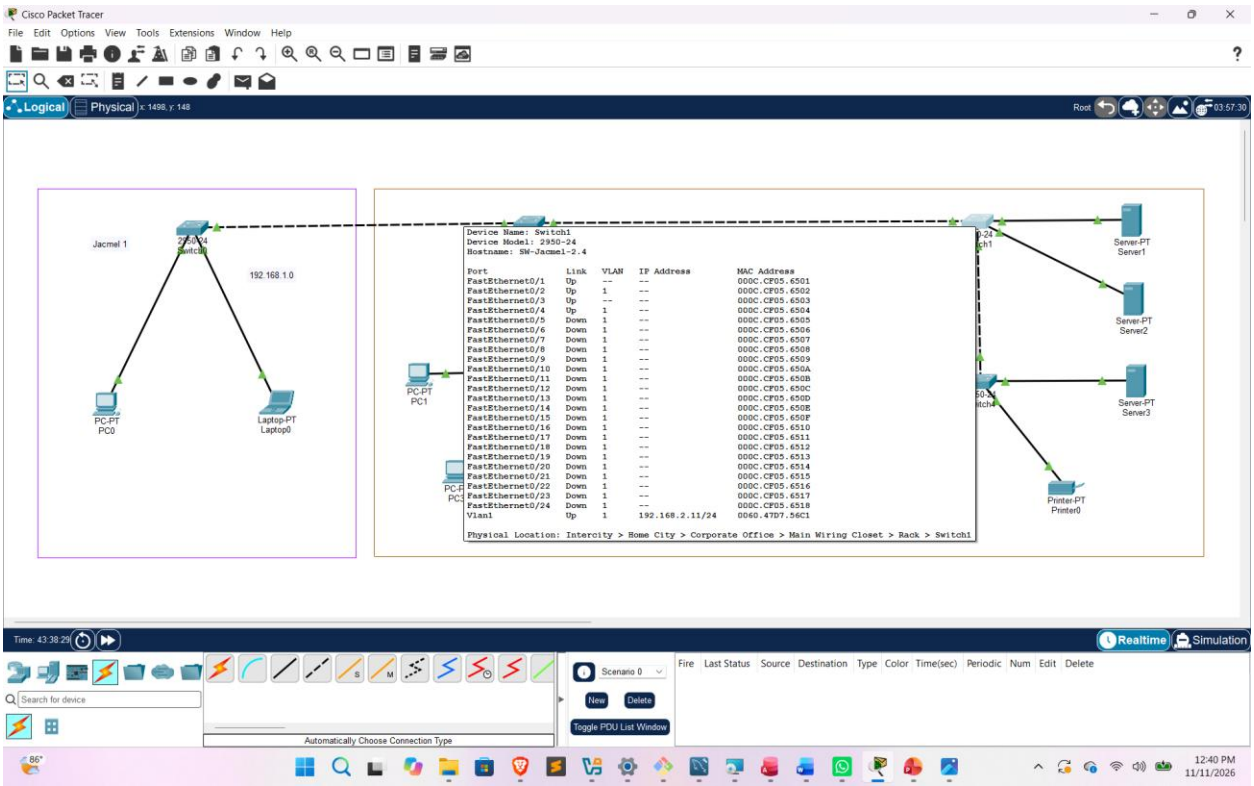

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
Jacmel 1
192.168.1.0
192.168.2.0
PC-PT PC0
Laptop-PT Laptop0
PC-PT PC1
PC-PT PC3
Server-PT Server1
Server-PT Server2
Server-PT Server3
Printer-PT Printer0
Device Name: Switch3
Device Model: 2950-24
Hostname: SW-Jacmel-2.1
Physical Location: Intercity > Home City > Corporate Office > Main Wiring Closet > Rack > Switch3
Realtime Simulation
Automatically Choose Connection Type
12:24 PM
11/11/2026

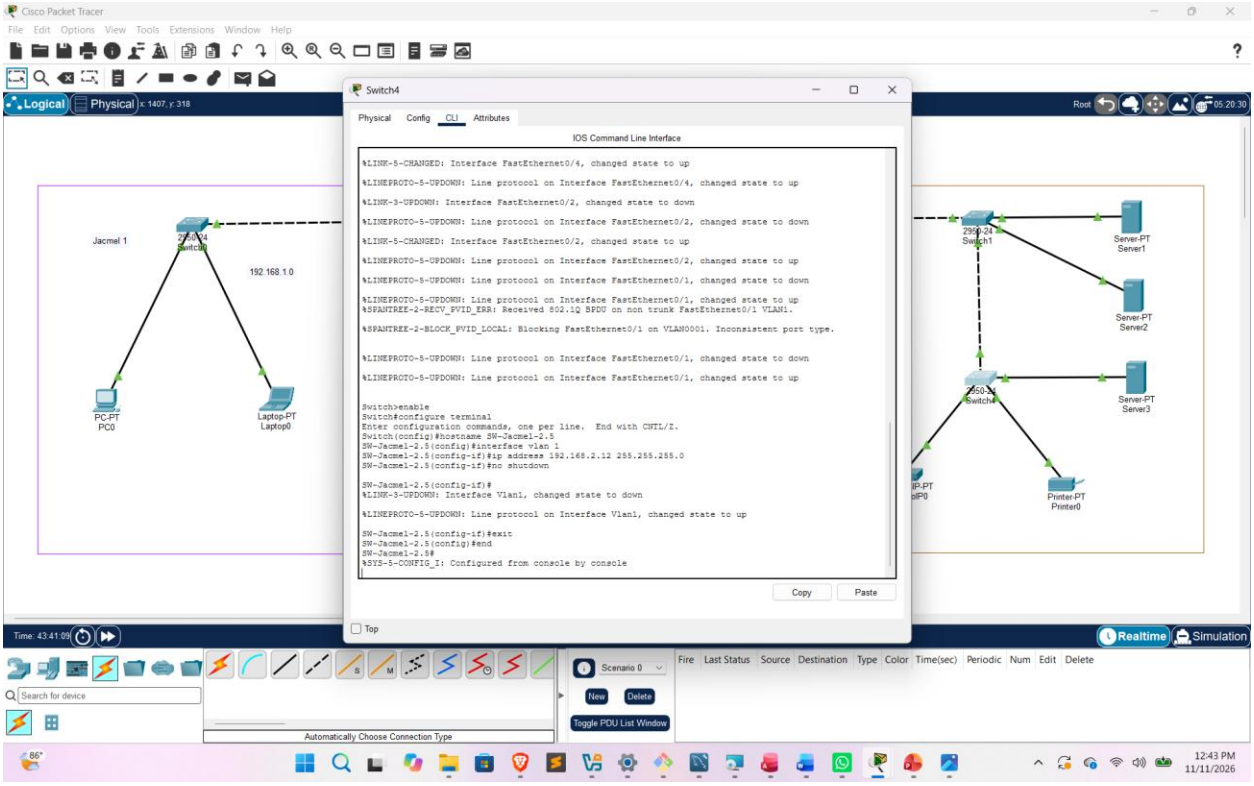

Cisco Packet Tracer
Server1
Physical Config Services Desktop Programming Attributes
IP Configuration
DHCP
Static
IPv4 Address 192.168.2.8
Subnet Mask 255.255.255.0
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address FE80::200:CFF:FE89:7874
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top
Jacmel 1
192.168.1.0
PC-PT PC0
Laptop-PT Laptop0
Server-PT Server1
Server-PT Server2
Server-PT Server3
Printer-PT Printer0
Realtime Simulation
Automatically Choose Connection Type
12:26 PM
11/11/2026

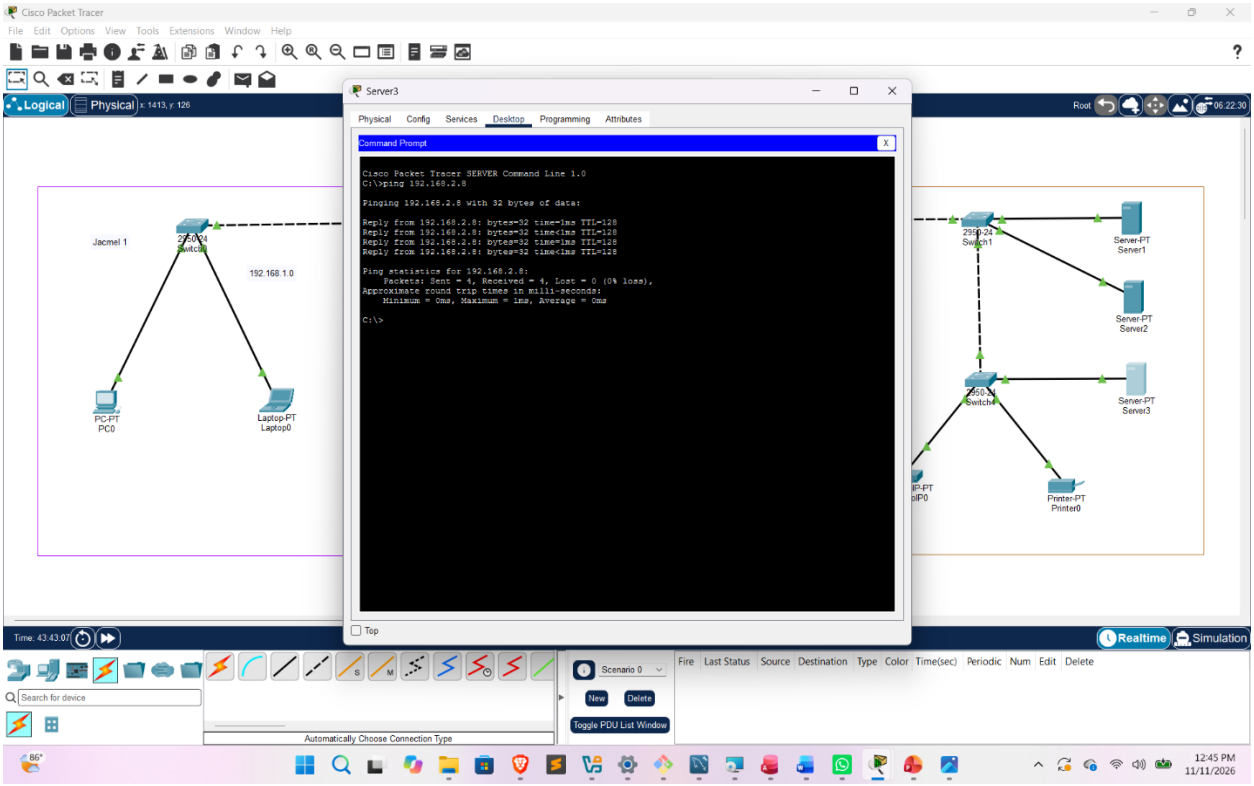

Cisco Packet Tracer
PC0
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.1
Pinging 192.168.1.1 with 32 bytes of data:
Request timed out.
Reply from 192.168.1.1: bytes=32 time<1ms TTL=255
Reply from 192.168.1.1: bytes=32 time<1ms TTL=255
Reply from 192.168.1.1: bytes=32 time<1ms TTL=255
Ping statistics for 192.168.1.1:
Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>ping 192.168.1.3
Pinging 192.168.1.3 with 32 bytes of data:
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Ping statistics for 192.168.1.3:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>
Physical
Config
Desktop
Programming
Attributes
Top
Jacmel 1
192.168.1.0
PC-PT PC0
Laptop-PT Laptop0
Server-PT Server1
Server-PT Server2
Server-PT Server3
Printer-PT Printer0
Logical
Physical
Realtime
Simulation
Fire
Last Status
Source
Destination
Type
Color
Time(sec)
Periodic
Num
Edit
Delete
Scenario 0
New
Delete
Toggle PDU List Window
Automatically Choose Connection Type
12:30 PM
11/11/2026

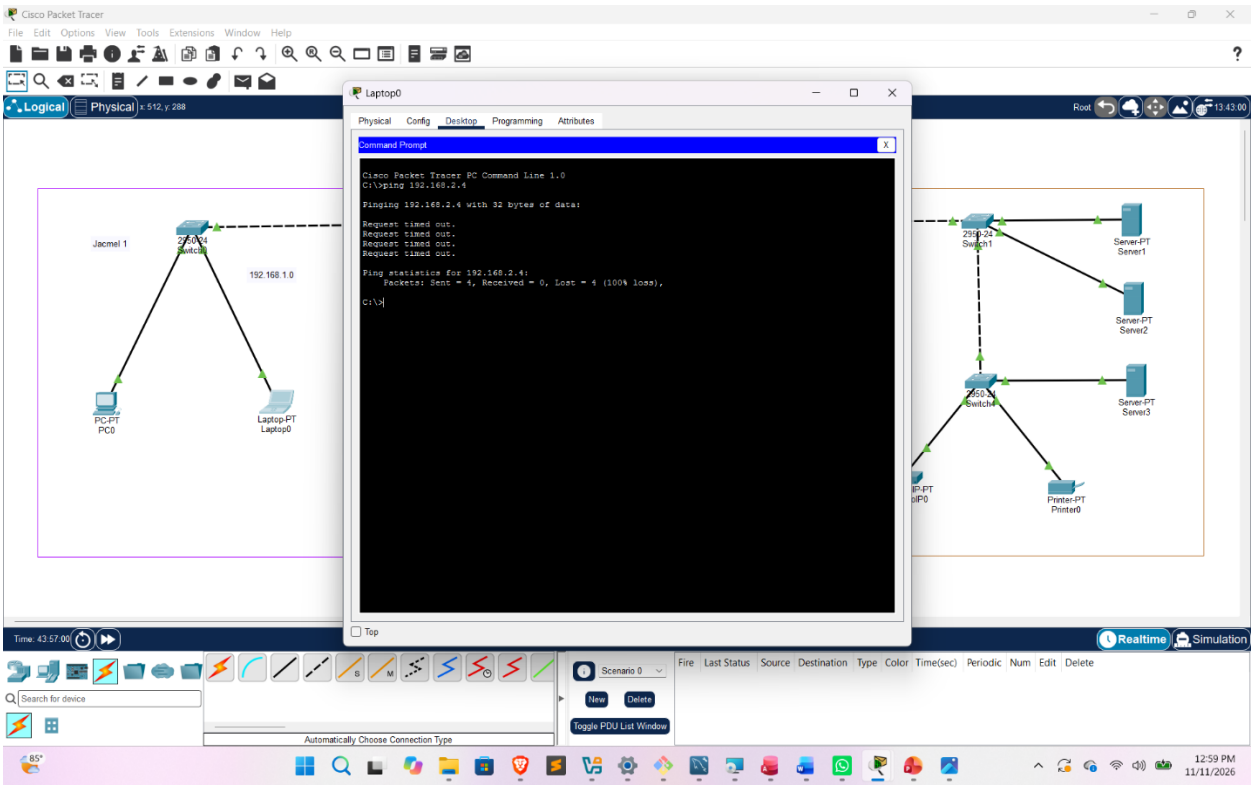

Cisco Packet Tracer
PC3
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.2.1
Pinging 192.168.2.1 with 32 bytes of data:
Request timed out.
Reply from 192.168.2.1: bytes=32 time<1ms TTL=255
Reply from 192.168.2.1: bytes=32 time<1ms TTL=255
Reply from 192.168.2.1: bytes=32 time<1ms TTL=255
Ping statistics for 192.168.2.1:
Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>ping 192.168.2.6
Pinging 192.168.2.6 with 32 bytes of data:
Reply from 192.168.2.6: bytes=32 time<1ms TTL=128
Reply from 192.168.2.6: bytes=32 time<1ms TTL=128
Reply from 192.168.2.6: bytes=32 time<1ms TTL=128
Reply from 192.168.2.6: bytes=32 time<1ms TTL=128
Ping statistics for 192.168.2.6:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>
Physical
Config
Desktop
Programming
Attributes
Top
Jacmel 1
192.168.1.0
PC-PT PC0
Laptop-PT Laptop0
Server-PT Server1
Server-PT Server2
Server-PT Server3
Printer-PT Printer0
Logical
Physical
Realtime
Simulation
Fire
Last Status
Source
Destination
Type
Color
Time(sec)
Periodic
Num
Edit
Delete
Scenario 0
New
Delete
Toggle PDU List Window
Automatically Choose Connection Type
12:31 PM
11/11/2026

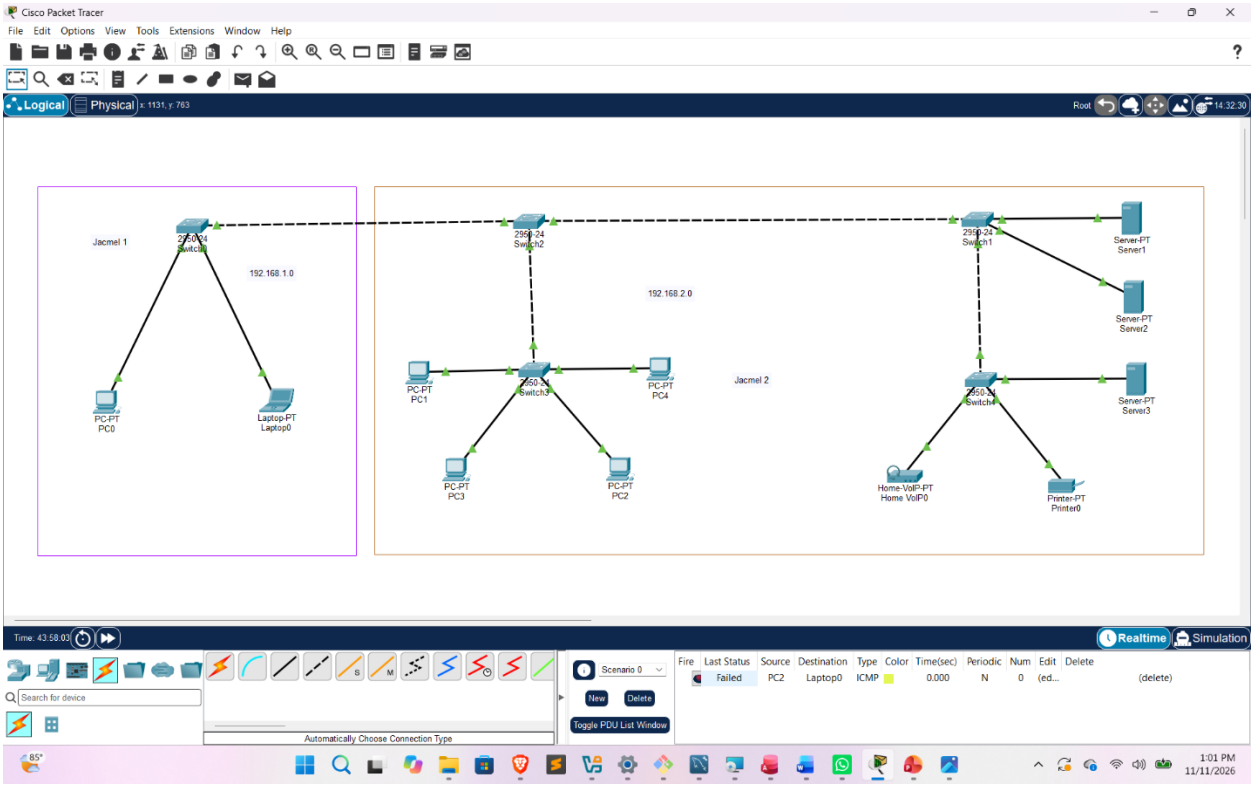

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
Switch1
Physical Config CLI Attributes
IOS Command Line Interface
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
%SPANTREE-2-RECV_PVID_ERR: Received 802.1Q BPDU on non trunk FastEthernet0/3 VLAN1.
%SPANTREE-2-BLOCK_PVID_LOCAL: Blocking FastEthernet0/3 on VLAN0001. Inconsistent port type.
%SPANTREE-2-RECV_PVID_ERR: Received 802.1Q BPDU on non trunk FastEthernet0/1 VLAN1.
%SPANTREE-2-BLOCK_PVID_LOCAL: Blocking FastEthernet0/1 on VLAN0001. Inconsistent port type.
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
Switch>enable
Switch#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#hostname SW-Jacmel-2.4
SW-Jacmel-2.4(config)#interface vlan 1
SW-Jacmel-2.4(config-if)#ip address 192.168.2.11 255.255.255.0
SW-Jacmel-2.4(config-if)#no shutdown
SW-Jacmel-2.4(config-if)#
%LINK-5-UPDOWN: Interface Vlan1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan1, changed state to up
SW-Jacmel-2.4(config-if)#exit
SW-Jacmel-2.4(config)#end
SW-Jacmel-2.4#
%SYS-5-CONFIG_I: Configured from console by console
Copy Paste
Top
Jacmel 1
192.168.1.0
PC-PT PC0
Laptop-PT Laptop0
Server-PT Server1
Server-PT Server2
Server-PT Server3
Printer-PT Printer0
Realtime Simulation
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
Scenario 0
New Delete
Toggle PDU List Window
Automatically Choose Connection Type
12:38 PM
11/11/2026

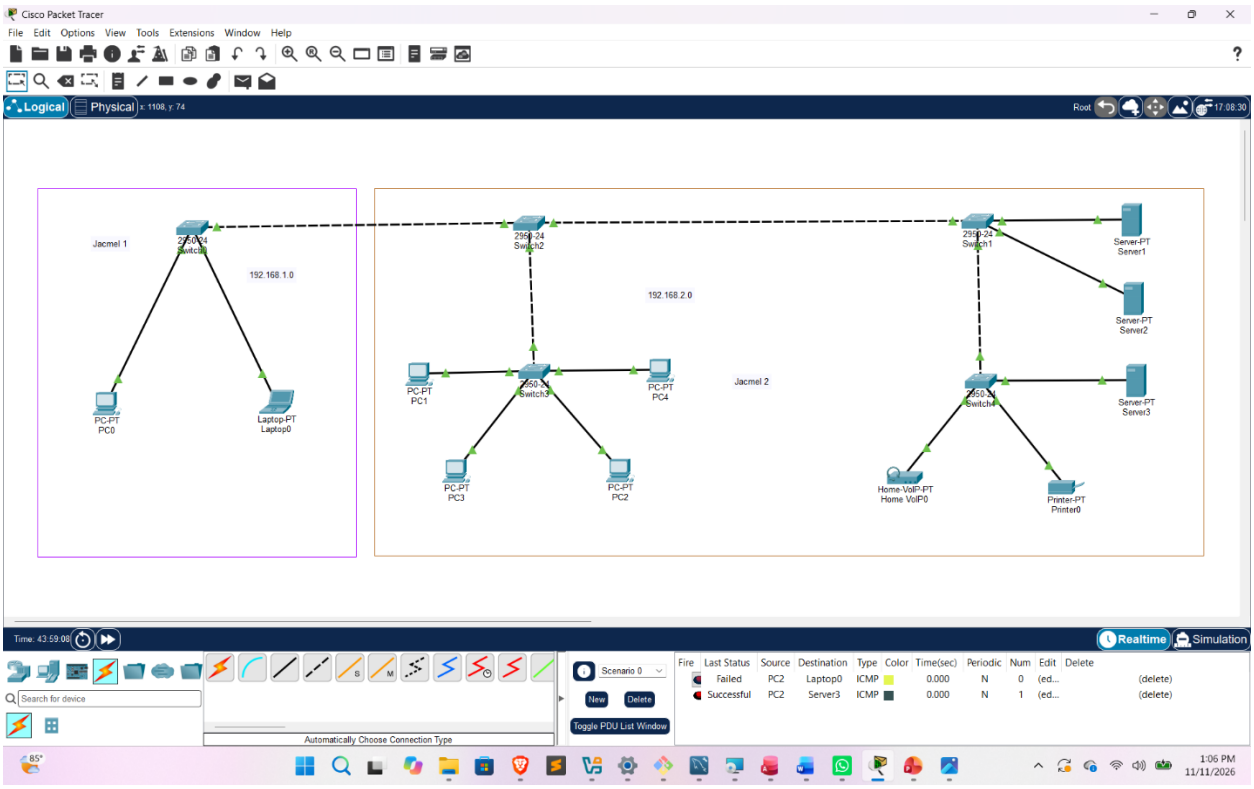

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
Device Name: Switch1
Device Model: 2950-24
Hostname: SW-Jacmel-2.4
Port Link VLAN IP Address MAC Address
FastEthernet0/1 Up -- -- 000C.CF05.6501
FastEthernet0/2 Up 1 -- 000C.CF05.6502
FastEthernet0/3 Up -- -- 000C.CF05.6503
FastEthernet0/4 Up 1 -- 000C.CF05.6504
FastEthernet0/5 Down 1 -- 000C.CF05.6505
FastEthernet0/6 Down 1 -- 000C.CF05.6506
FastEthernet0/7 Down 1 -- 000C.CF05.6507
FastEthernet0/8 Down 1 -- 000C.CF05.6508
FastEthernet0/9 Down 1 -- 000C.CF05.6509
FastEthernet0/10 Down 1 -- 000C.CF05.650A
FastEthernet0/11 Down 1 -- 000C.CF05.650B
FastEthernet0/12 Down 1 -- 000C.CF05.650C
FastEthernet0/13 Down 1 -- 000C.CF05.650D
FastEthernet0/14 Down 1 -- 000C.CF05.650E
FastEthernet0/15 Down 1 -- 000C.CF05.650F
FastEthernet0/16 Down 1 -- 000C.CF05.6510
FastEthernet0/17 Down 1 -- 000C.CF05.6511
FastEthernet0/18 Down 1 -- 000C.CF05.6512
FastEthernet0/19 Down 1 -- 000C.CF05.6513
FastEthernet0/20 Down 1 -- 000C.CF05.6514
FastEthernet0/21 Down 1 -- 000C.CF05.6515
FastEthernet0/22 Down 1 -- 000C.CF05.6516
FastEthernet0/23 Down 1 -- 000C.CF05.6517
FastEthernet0/24 Down 1 -- 000C.CF05.6518
Vlan1 Up 1 192.168.2.11/24 0060.47D7.56C1
Physical Location: Intercity > Home City > Corporate Office > Main Wiring Closet > Rack > Switch1
Jacmel 1
192.168.1.0
PC-PT PC0
PC-PT PC1
Laptop-PT Laptop0
Server-PT Server1
Server-PT Server2
Server-PT Server3
Printer-PT Printer0
Realtime Simulation
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
Scenario 0
New Delete
Toggle PDU List Window
Automatically Choose Connection Type
12:40 PM
11/11/2026

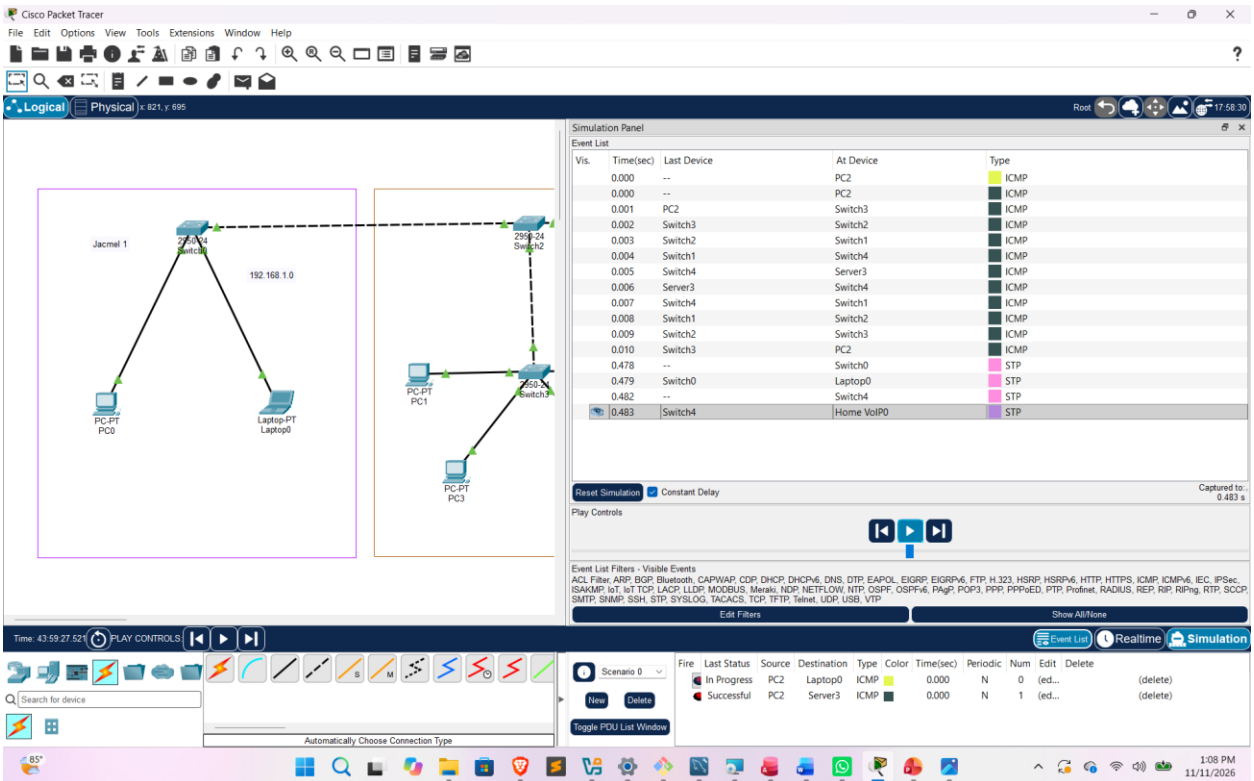

Cisco Packet Tracer
Switch4
Physical Config CLI Attributes
IOS Command Line Interface
%LINK-5-CHANGED: Interface FastEthernet0/4, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/4, changed state to up
%LINK-3-UPDOWN: Interface FastEthernet0/2, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to down
%LINK-5-CHANGED: Interface FastEthernet0/2, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
%SPANTREE-2-RECV_PVID_ERR: Received 802.1Q BPDU on non trunk FastEthernet0/1 VLAN1.
%SPANTREE-2-BLOCK_PVID_LOCAL: Blocking FastEthernet0/1 on VLAN0001. Inconsistent port type.
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
Switch>enable
Switch#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#hostname SW-Jacmel-2.5
SW-Jacmel-2.5(config)#interface vlan 1
SW-Jacmel-2.5(config-if)#ip address 192.168.2.12 255.255.255.0
SW-Jacmel-2.5(config-if)#no shutdown
SW-Jacmel-2.5(config-if)#
%LINK-5-UPDOWN: Interface Vlan1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan1, changed state to up
SW-Jacmel-2.5(config-if)#exit
SW-Jacmel-2.5(config)#end
SW-Jacmel-2.5#
%SYS-5-CONFIG_I: Configured from console by console
Copy Paste
Top
Jacmel 1
192.168.1.0
PC-PT PC0
Laptop-PT Laptop0
Server-PT Server1
Server-PT Server2
Server-PT Server3
Printer-PT Printer0
Realtime Simulation
Automatically Choose Connection Type
12:43 PM 11/11/2026


Cisco Packet Tracer
Server3
Physical Config Services Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer SERVER Command Line 1.0
C:\>ping 192.168.2.8
Pinging 192.168.2.8 with 32 bytes of data:
Reply from 192.168.2.8: bytes=32 time=1ms TTL=128
Reply from 192.168.2.8: bytes=32 time<1ms TTL=128
Reply from 192.168.2.8: bytes=32 time<1ms TTL=128
Reply from 192.168.2.8: bytes=32 time<1ms TTL=128
Ping statistics for 192.168.2.8:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 1ms, Average = 0ms
C:\>
Top
Jacmel 1
192.168.1.0
PC-PT PC0
Laptop-PT Laptop0
Server-PT Server1
Server-PT Server2
Server-PT Server3
Printer-PT Printer0
Realtime Simulation
Automatically Choose Connection Type
12:45 PM 11/11/2026


Cisco Packet Tracer
Laptop0
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.2.4
Pinging 192.168.2.4 with 32 bytes of data:
Request timed out.
Request timed out.
Request timed out.
Request timed out.
Ping statistics for 192.168.2.4:
Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
C:\>
Top
Jacmel 1
192.168.1.0
PC-PT PC0
Laptop-PT Laptop0
Server-PT Server1
Server-PT Server2
Server-PT Server3
Printer-PT Printer0
Realtime
Simulation
Automatically Choose Connection Type


Cisco Packet Tracer
Jacmel 1
192.168.1.0
192.168.2.0
Jacmel 2
PC-PT PC0
Laptop-PT Laptop0
PC-PT PC1
PC-PT PC2
PC-PT PC3
PC-PT PC4
Server-PT Server1
Server-PT Server2
Server-PT Server3
Printer-PT Printer0
Home-VoIP-PT Home VoIP0
Realtime
Simulation
Automatically Choose Connection Type

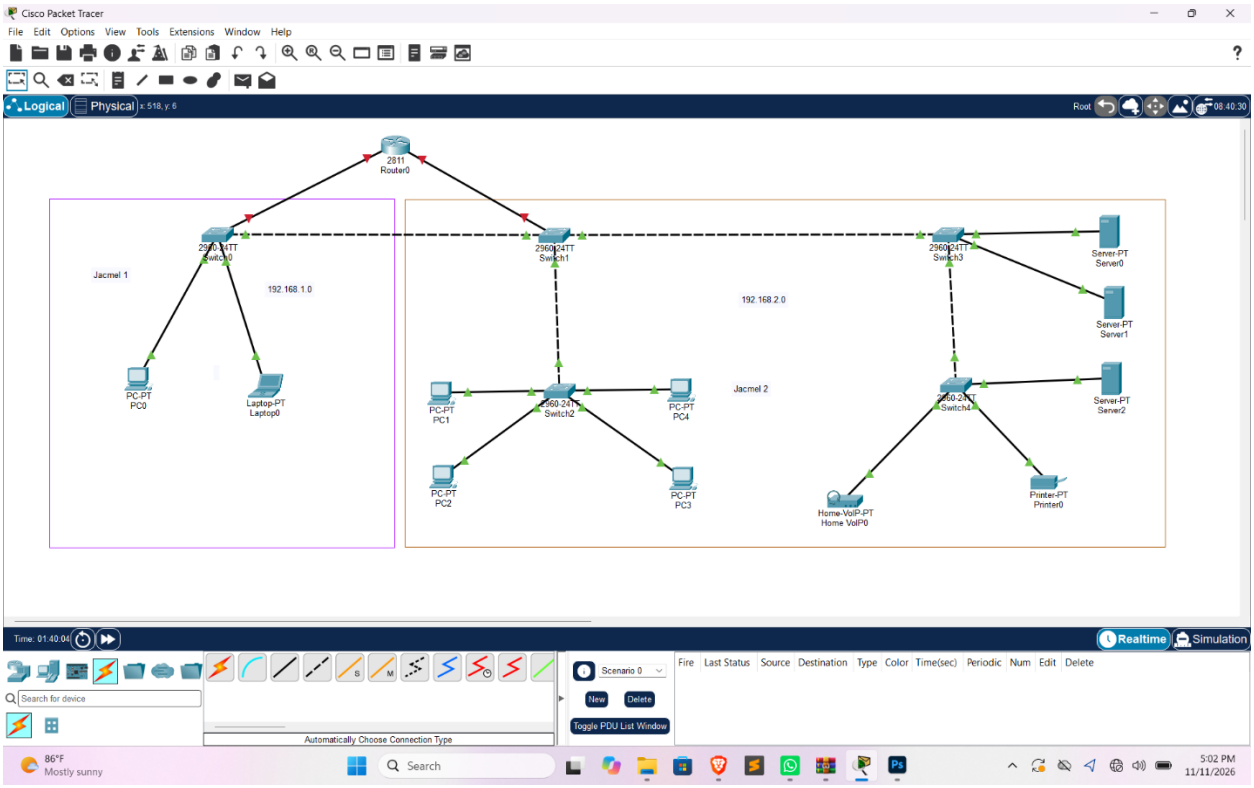

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
Jacmel 1
192.168.1.0
192.168.2.0
Jacmel 2
2950-24 Switch0
2950-24 Switch2
2950-24 Switch1
2950-24 Switch3
2950-24 Switch4
Server-PT Server1
Server-PT Server2
Server-PT Server3
PC-PT PC0
PC-PT PC1
PC-PT PC2
PC-PT PC3
PC-PT PC4
Laptop-PT Laptop0
Home-VoIP-PT Home VoIP0
Printer-PT Printer0
Realtime
Simulation
Scenario 0
New
Delete
Toggle PDU List Window
Automatically Choose Connection Type
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
Failed PC2 Laptop0 ICMP 0.000 N 0 (ed... (delete)
Successful PC2 Server3 ICMP 0.000 N 1 (ed... (delete)

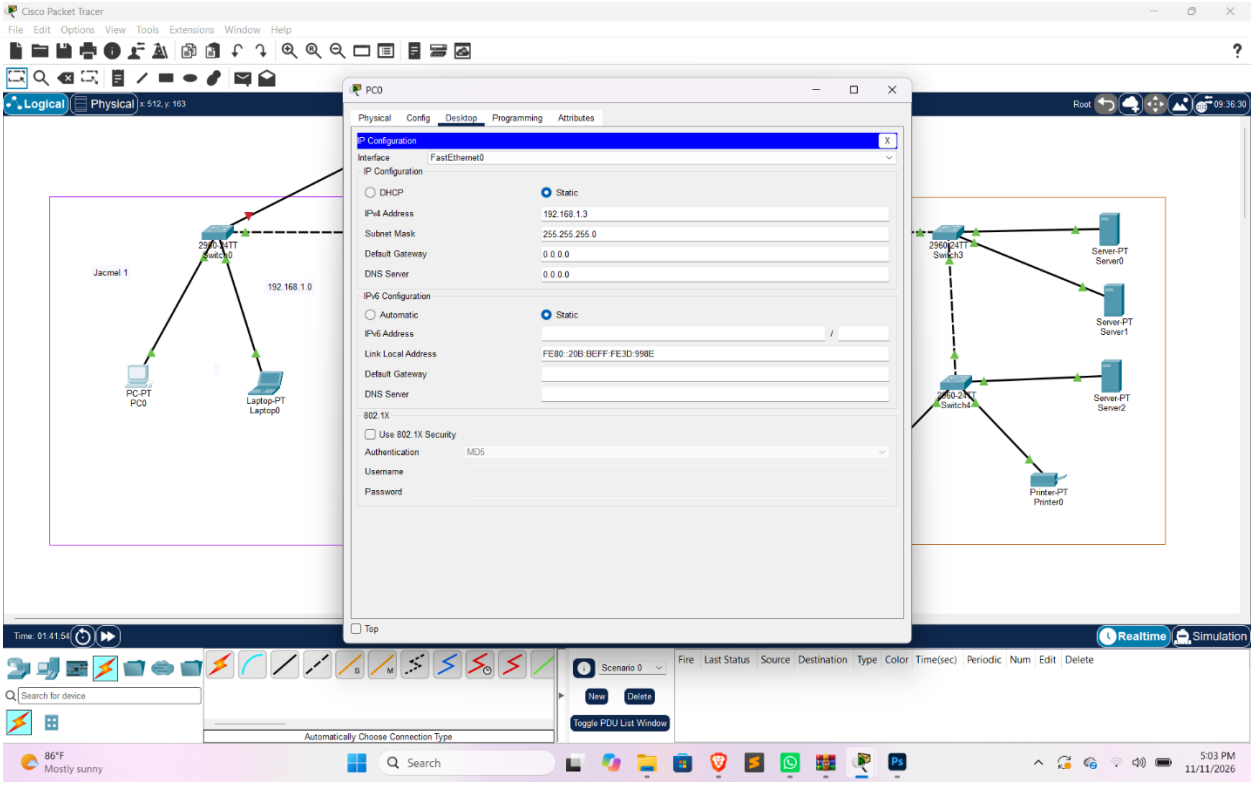

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
Simulation Panel
Event List
Vis. Time(sec) Last Device At Device Type
0.000 -- PC2 ICMP
0.000 -- PC2 ICMP
0.001 PC2 Switch3 ICMP
0.002 Switch3 Switch2 ICMP
0.003 Switch2 Switch1 ICMP
0.004 Switch1 Switch4 ICMP
0.005 Switch4 Server3 ICMP
0.006 Server3 Switch4 ICMP
0.007 Switch4 Switch1 ICMP
0.008 Switch1 Switch2 ICMP
0.009 Switch2 Switch3 ICMP
0.010 Switch3 PC2 ICMP
0.478 -- Switch0 STP
0.479 Switch0 Laptop0 STP
0.482 -- Switch4 STP
0.483 Switch4 Home VoIP0 STP
Reset Simulation
Constant Delay
Play Controls
Edit Filters
Show All/None
Jacmel 1
192.168.1.0
PC-PT PC0
PC-PT PC1
PC-PT PC3
Laptop-PT Laptop0
Realtime
Simulation
Scenario 0
New
Delete
Toggle PDU List Window
Automatically Choose Connection Type
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
In Progress PC2 Laptop0 ICMP 0.000 N 0 (ed... (delete)
Successful PC2 Server3 ICMP 0.000 N 1 (ed... (delete)

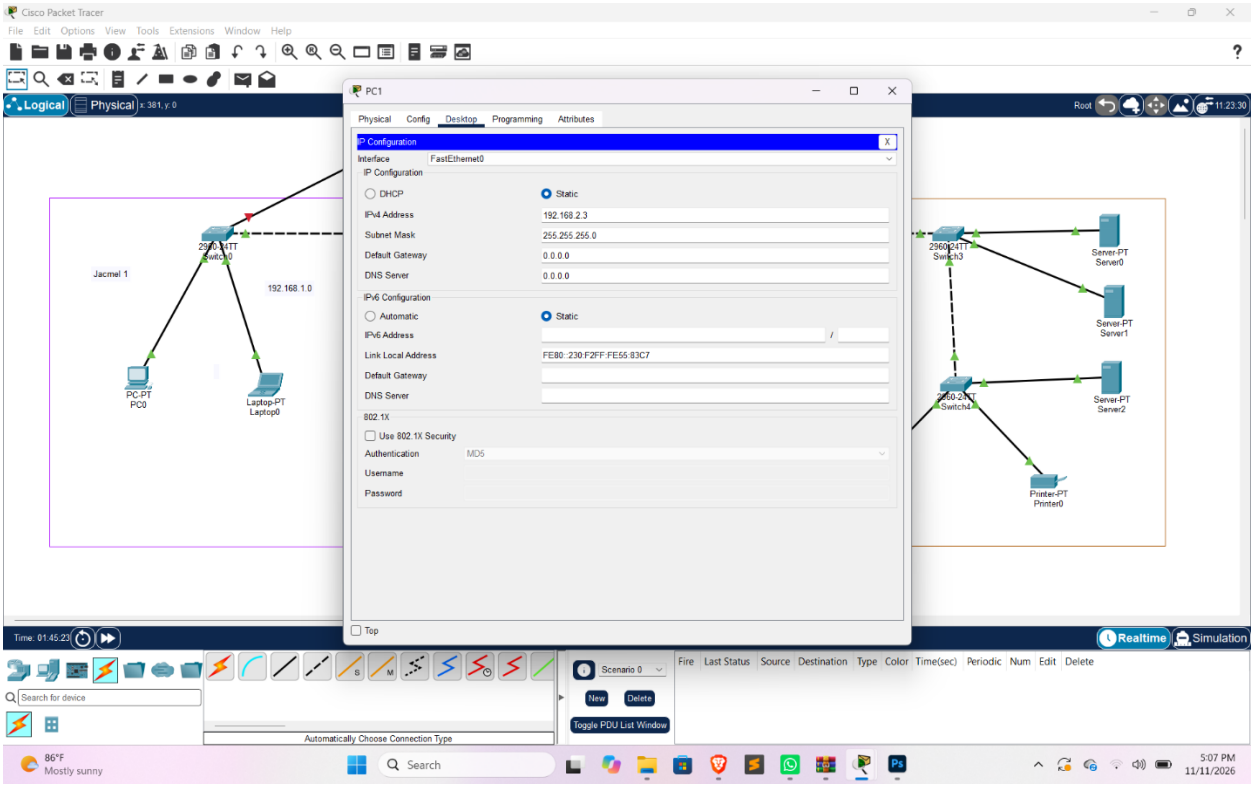
On remarque que lorsque les appareils ne peuvent pas se connecté lorsqu'ils sont sur deux Vlan différents ou  qu'ils sont sur deux réseaux differents et qu'il n'y a pas de passerelle.

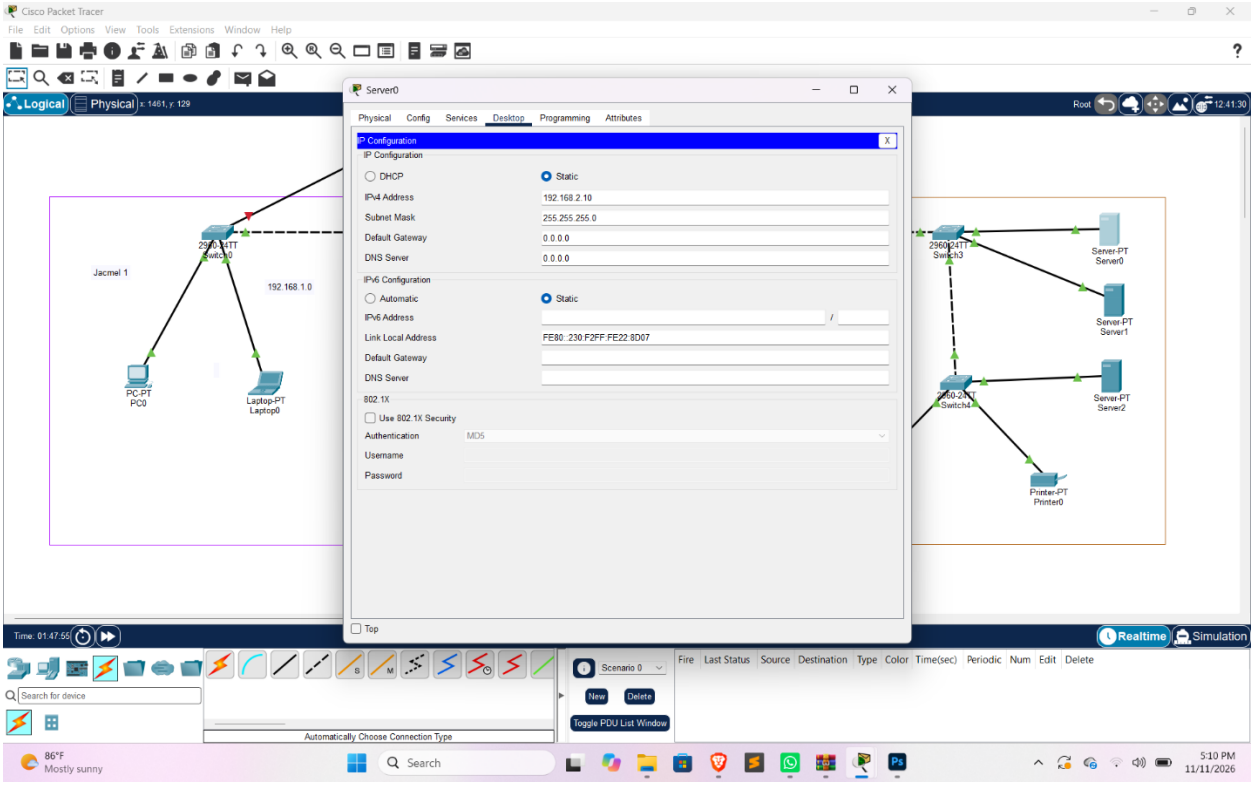
## Exercice 2

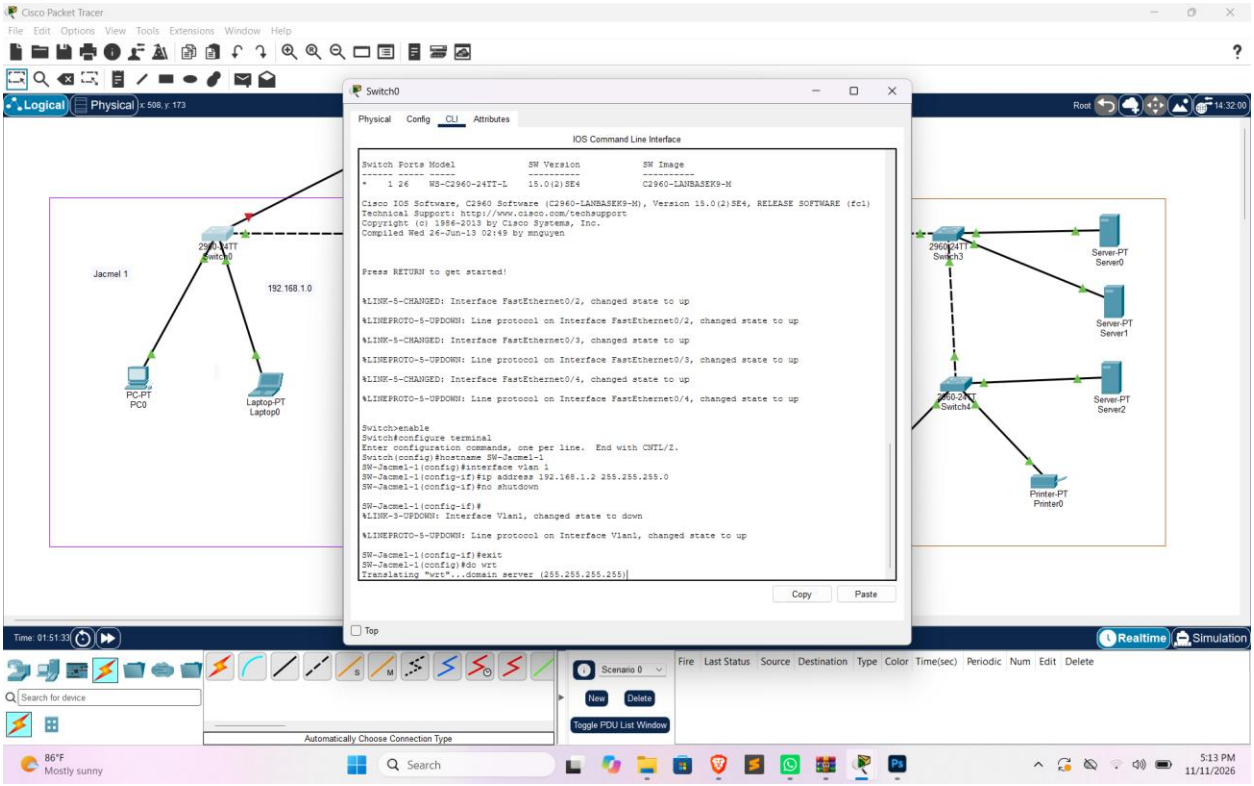
Reproduisez cette topologie en configurant le routeur et les switchs, puis en attribuant les adresses IP aux dispositifs. Utilisez soit IPv4, soit IPv6, et testez la connectivité des deux VLAN à l'aide de la commande ping et du mode de simulation.

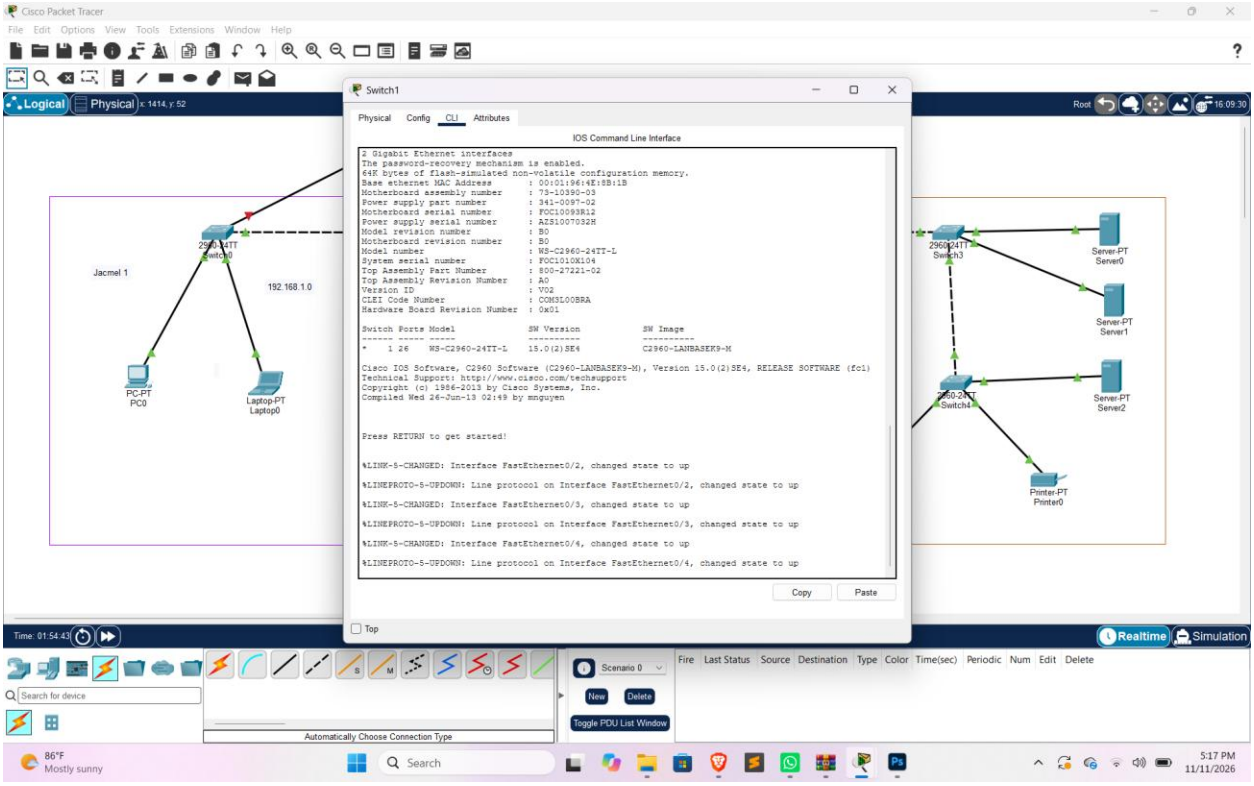


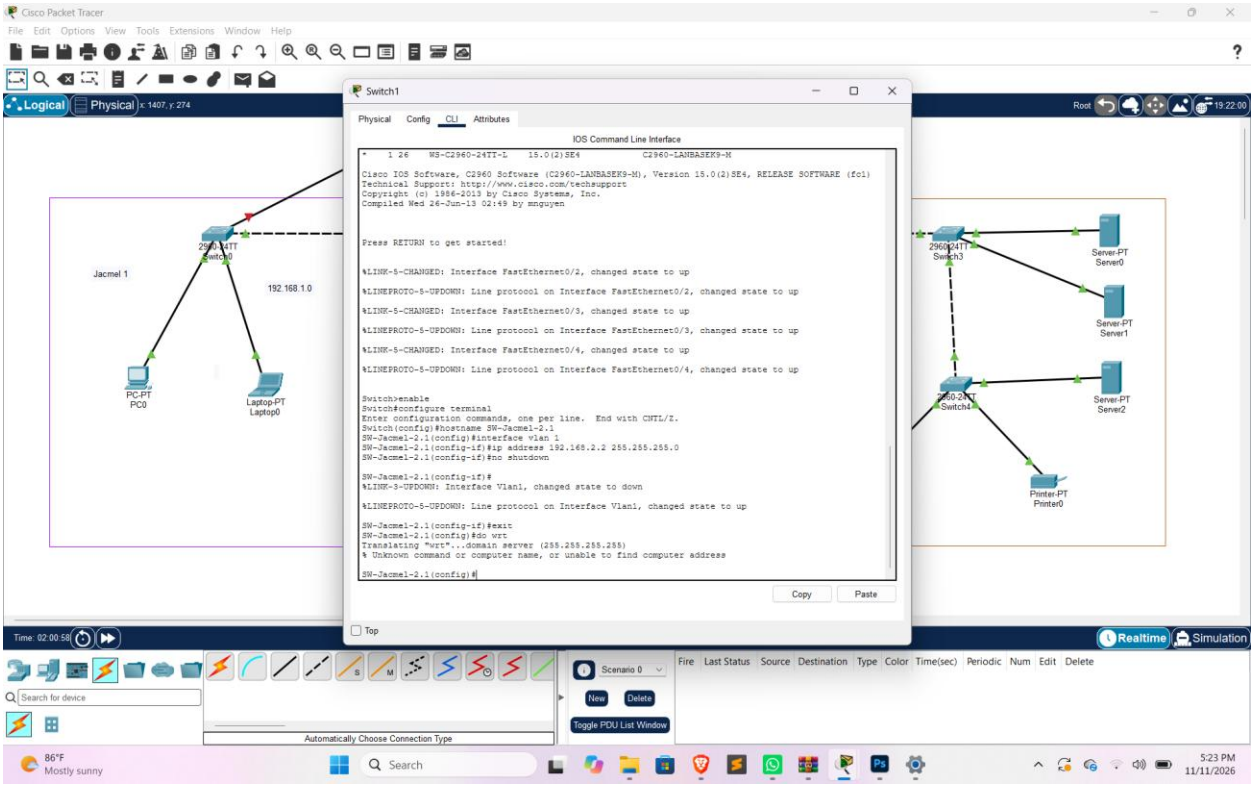

Cisco Packet Tracer
PC0
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
DHCP
Static
IPv4 Address 192.168.1.3
Subnet Mask 255.255.255.0
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address FE80::20B:BEFF:FE3D:998E
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top
Jacmel 1
192.168.1.0
PC-PT PC0
Laptop-PT Laptop0
Server-PT Server0
Server-PT Server1
Server-PT Server2
Printer-PT Printer0
Realtime
Simulation
Scenario 0
New
Delete
Toggle PDU List Window
Automatically Choose Connection Type
Search
86°F Mostly sunny
5:03 PM 11/11/2026

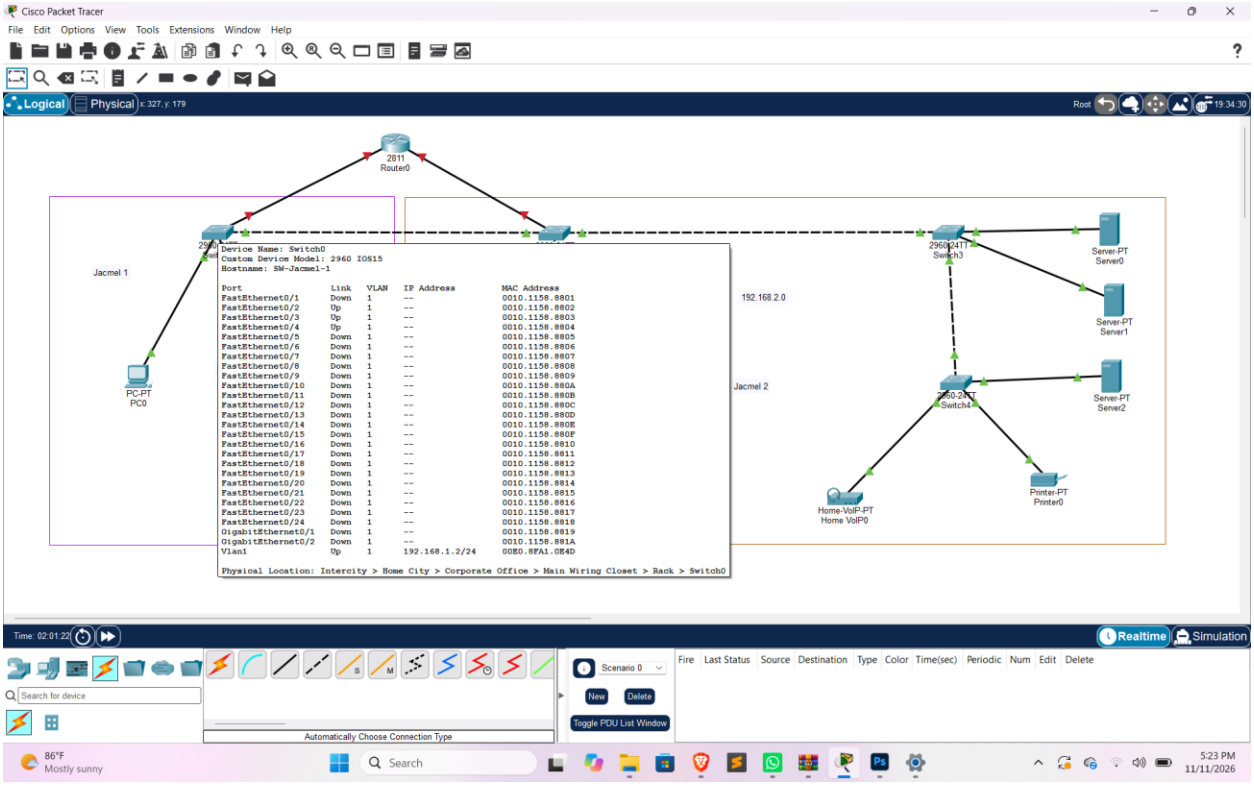

Cisco Packet Tracer
PC1
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
DHCP
Static
IPv4 Address 192.168.2.3
Subnet Mask 255.255.255.0
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address FE80::230:F2FF:FE55:83C7
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top
Jacmel 1
192.168.1.0
PC-PT PC0
Laptop-PT Laptop0
Server-PT Server0
Server-PT Server1
Server-PT Server2
Printer-PT Printer0
Realtime
Simulation
Scenario 0
New
Delete
Toggle PDU List Window
Automatically Choose Connection Type
Search
86°F Mostly sunny
5:07 PM 11/11/2026

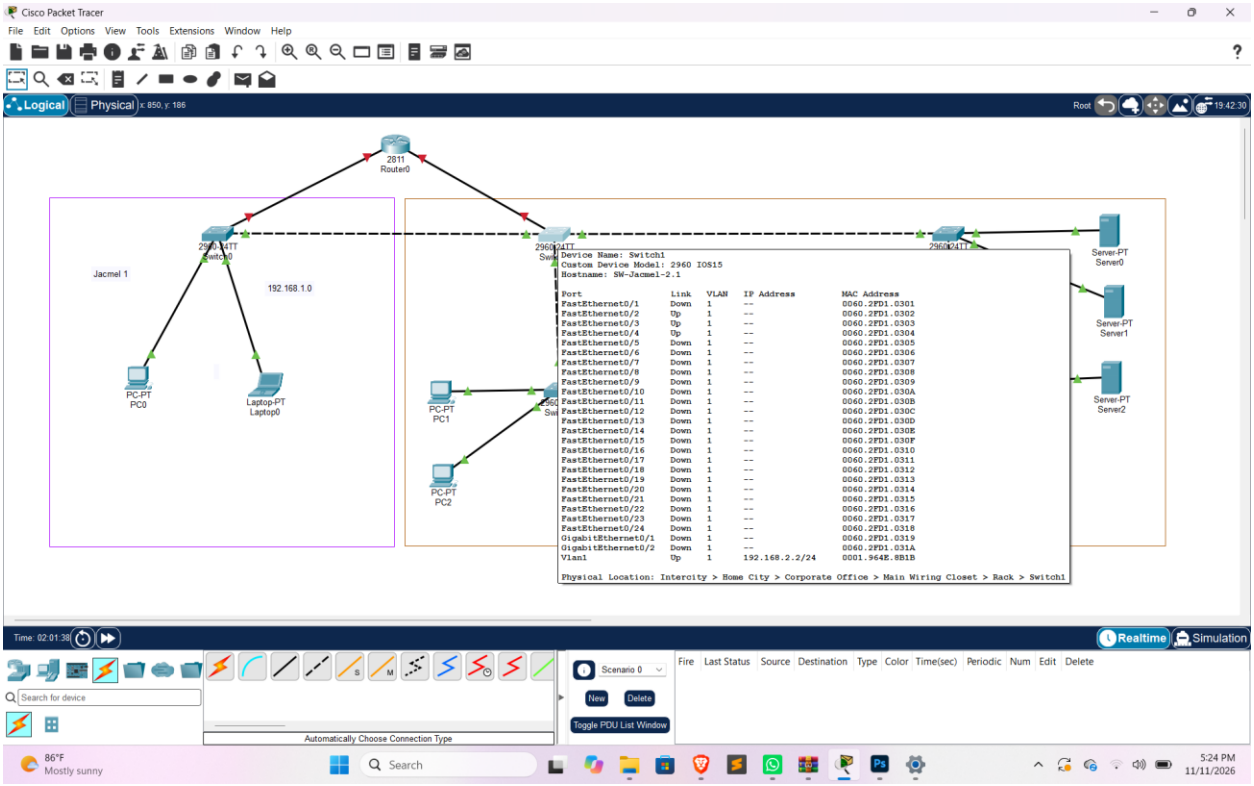

Cisco Packet Tracer
Server0
Physical
Config
Services
Desktop
Programming
Attributes
IP Configuration
DHCP
Static
IPv4 Address
192.168.2.10
Subnet Mask
255.255.255.0
Default Gateway
0.0.0.0
DNS Server
0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address
FE80::230:F2FF:FE22:8D07
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top
Jacmel 1
192.168.1.0
PC-PT PC0
Laptop-PT Laptop0
Server-PT Server0
Server-PT Server1
Server-PT Server2
Printer-PT Printer0
Realtime
Simulation
Fire
Last Status
Source
Destination
Type
Color
Time(sec)
Periodic
Num
Edit
Delete
Scenario 0
New
Delete
Toggle PDU List Window
Automatically Choose Connection Type
86°F
Mostly sunny
Search
5:10 PM
11/11/2026

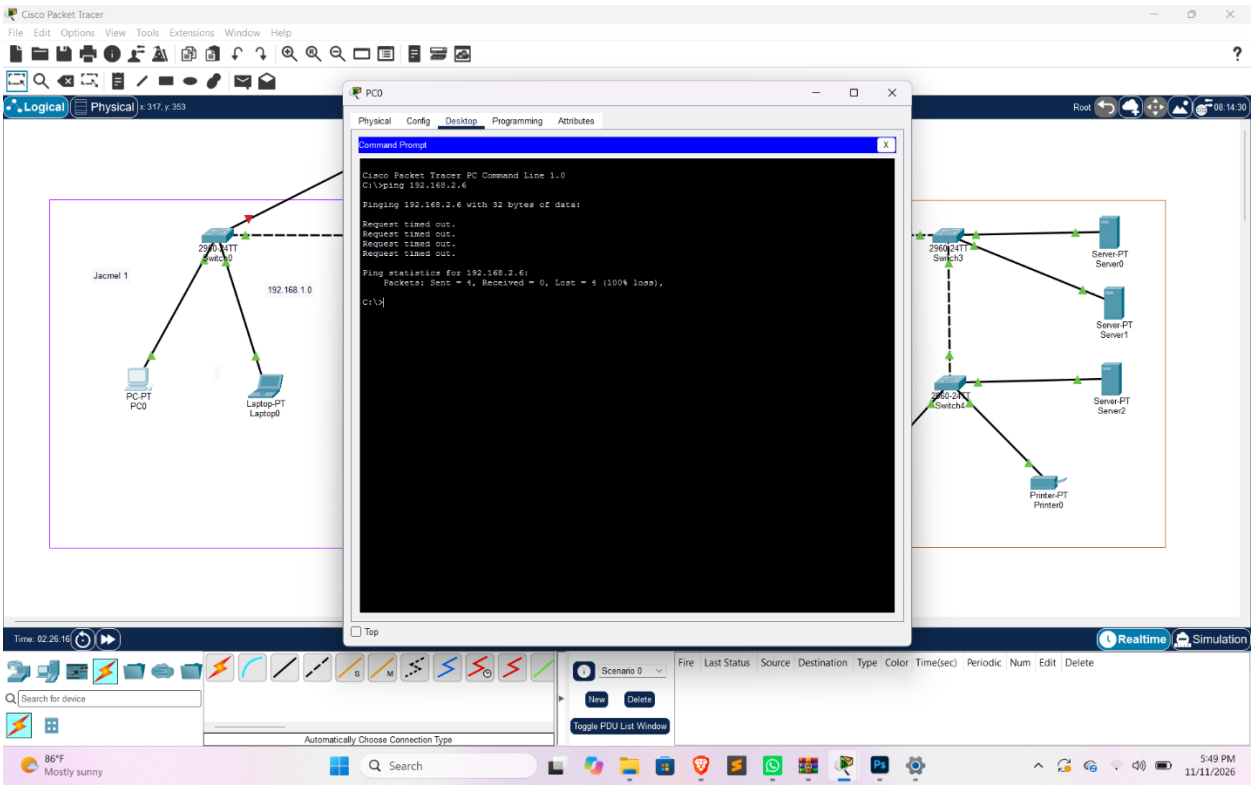

Cisco Packet Tracer
Switch0
Physical
Config
CLI
Attributes
IOS Command Line Interface
Switch Ports Model SW Version SW Image
1 26 WS-C2960-24TT-L 15.0(2)SE4 C2960-LANBASEK9-M
Cisco IOS Software, C2960 Software (C2960-LANBASEK9-M), Version 15.0(2)SE4, RELEASE SOFTWARE (fc1)
Technical Support: http://www.cisco.com/techsupport
Copyright (c) 1986-2013 by Cisco Systems, Inc.
Compiled Wed 26-Jun-13 02:49 by mnguyen
Press RETURN to get started!
%LINK-5-CHANGED: Interface FastEthernet0/2, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/3, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/4, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/4, changed state to up
Switch>enable
Switch#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#hostname SW-Jacmel-1
SW-Jacmel-1(config)#interface vlan 1
SW-Jacmel-1(config-if)#ip address 192.168.1.2 255.255.255.0
SW-Jacmel-1(config-if)#no shutdown
SW-Jacmel-1(config-if)#
%LINK-5-UPDOWN: Interface Vlan1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan1, changed state to up
SW-Jacmel-1(config-if)#exit
SW-Jacmel-1(config)#do wrt
Translating "wrt"...domain server (255.255.255.255)
Copy
Paste
Top
Jacmel 1
192.168.1.0
PC-PT PC0
Laptop-PT Laptop0
Server-PT Server0
Server-PT Server1
Server-PT Server2
Printer-PT Printer0
Realtime
Simulation
Scenario 0
New
Delete
Toggle PDU List Window
Automatically Choose Connection Type
86°F
Mostly sunny
Search
5:13 PM
11/11/2026

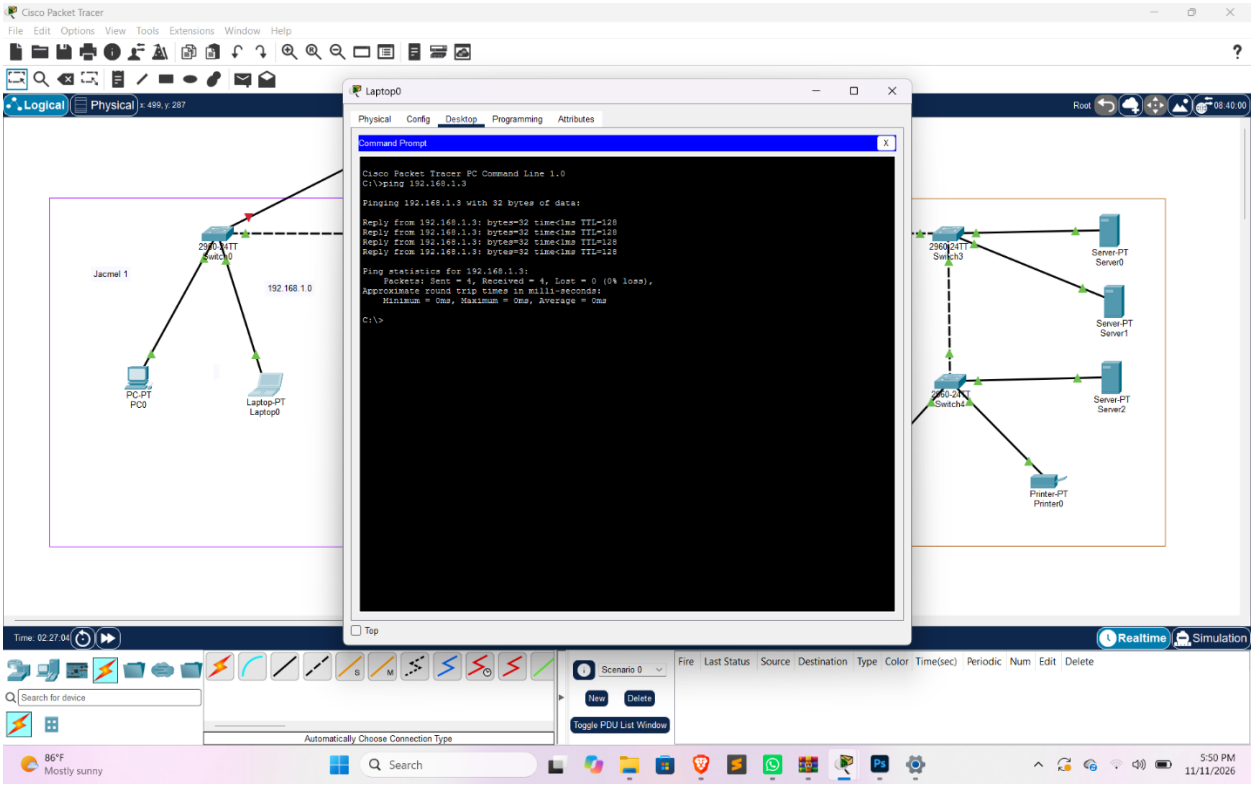

Cisco Packet Tracer
Switch1
Physical Config CLI Attributes
IOS Command Line Interface
2 Gigabit Ethernet interfaces
The password-recovery mechanism is enabled.
64K bytes of flash-simulated non-volatile configuration memory.
Base ethernet MAC Address : 00:01:96:4E:8B:1B
Motherboard assembly number : 73-10390-03
Power supply part number : 341-0097-02
Motherboard serial number : FOC10093R12
Power supply serial number : AZS1007032M
Model revision number : B0
Motherboard revision number : B0
Model number : WS-C2960-24TT-L
System serial number : FOC1010X104
Top Assembly Part Number : 800-27221-02
Top Assembly Revision Number : A0
Version ID : V02
CLEI Code Number : COM5L00BRA
Hardware Board Revision Number : 0x01
Switch Ports Model SW Version SW Image
* 1 26 WS-C2960-24TT-L 15.0(2)SE4 C2960-LANBASEK9-M
Cisco IOS Software, C2960 Software (C2960-LANBASEK9-M), Version 15.0(2)SE4, RELEASE SOFTWARE (fc1)
Technical Support: http://www.cisco.com/techsupport
Copyright (c) 1986-2013 by Cisco Systems, Inc.
Compiled Wed 26-Jun-13 02:49 by mnguyen
Press RETURN to get started!
%LINK-5-CHANGED: Interface FastEthernet0/2, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/3, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/4, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/4, changed state to up
Copy
Paste
Top
Jacmel 1
192.168.1.0
PC-PT PC0
Laptop-PT Laptop0
Server-PT Server0
Server-PT Server1
Server-PT Server2
Printer-PT Printer0
Realtime
Simulation
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
Scenario 0
New
Delete
Toggle PDU List Window
Automatically Choose Connection Type
86°F Mostly sunny
Search
5:17 PM 11/11/2026

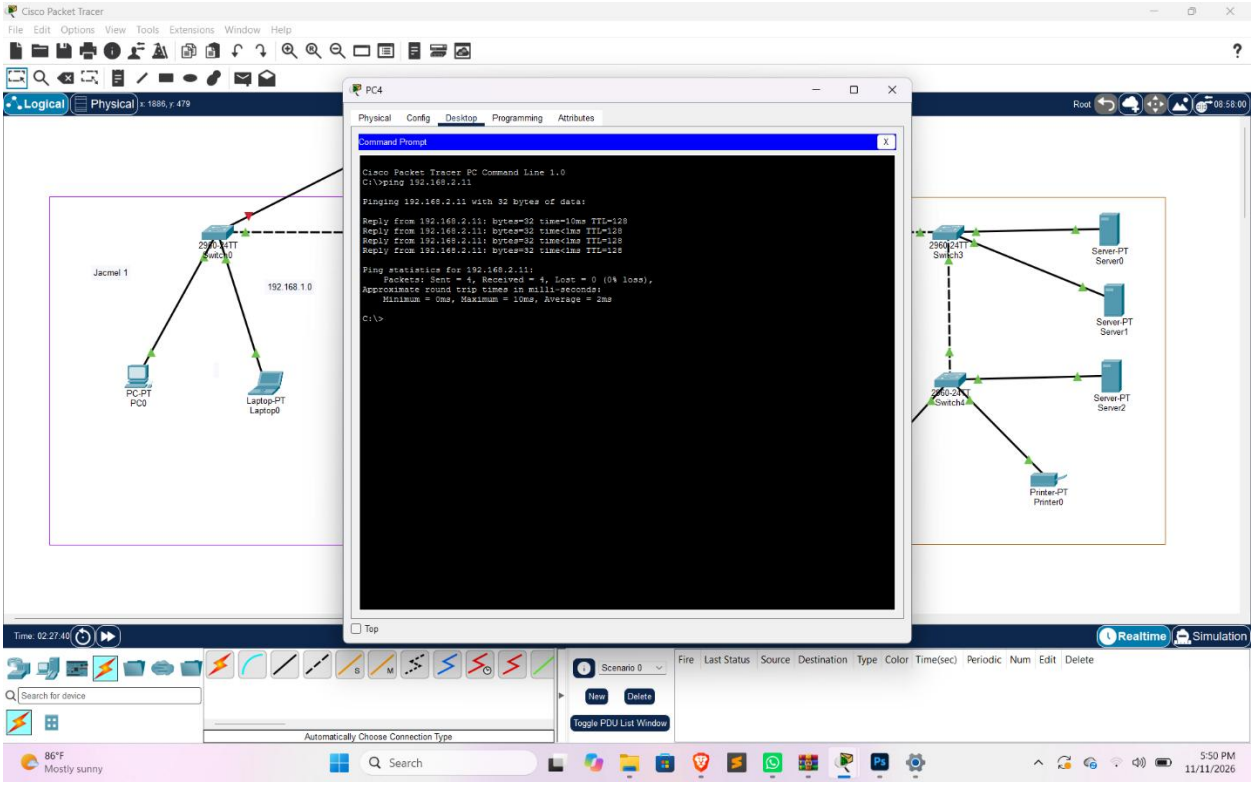

Cisco Packet Tracer
Switch1
Physical Config CLI Attributes
IOS Command Line Interface
* 1 26 WS-C2960-24TT-L 15.0(2)SE4 C2960-LANBASEK9-M
Cisco IOS Software, C2960 Software (C2960-LANBASEK9-M), Version 15.0(2)SE4, RELEASE SOFTWARE (fc1)
Technical Support: http://www.cisco.com/techsupport
Copyright (c) 1986-2013 by Cisco Systems, Inc.
Compiled Wed 26-Jun-13 02:49 by mnguyen
Press RETURN to get started!
%LINK-5-CHANGED: Interface FastEthernet0/2, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/3, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/4, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/4, changed state to up
Switch>enable
Switch#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#hostname SW-Jacmel-2.1
SW-Jacmel-2.1(config)#interface vlan 1
SW-Jacmel-2.1(config-if)#ip address 192.168.2.2 255.255.255.0
SW-Jacmel-2.1(config-if)#no shutdown
SW-Jacmel-2.1(config-if)#
%LINK-5-CHANGED: Interface Vlan1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan1, changed state to up
SW-Jacmel-2.1(config-if)#exit
SW-Jacmel-2.1(config)#do wrt
Translating "wrt"...domain server (255.255.255.255)
% Unknown command or computer name, or unable to find computer address
SW-Jacmel-2.1(config)#
Copy
Paste
Top
Jacmel 1
192.168.1.0
PC-PT PC0
Laptop-PT Laptop0
Server-PT Server0
Server-PT Server1
Server-PT Server2
Printer-PT Printer0
Realtime
Simulation
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
Scenario 0
New
Delete
Toggle PDU List Window
Automatically Choose Connection Type
86°F Mostly sunny
Search
5:23 PM 11/11/2026

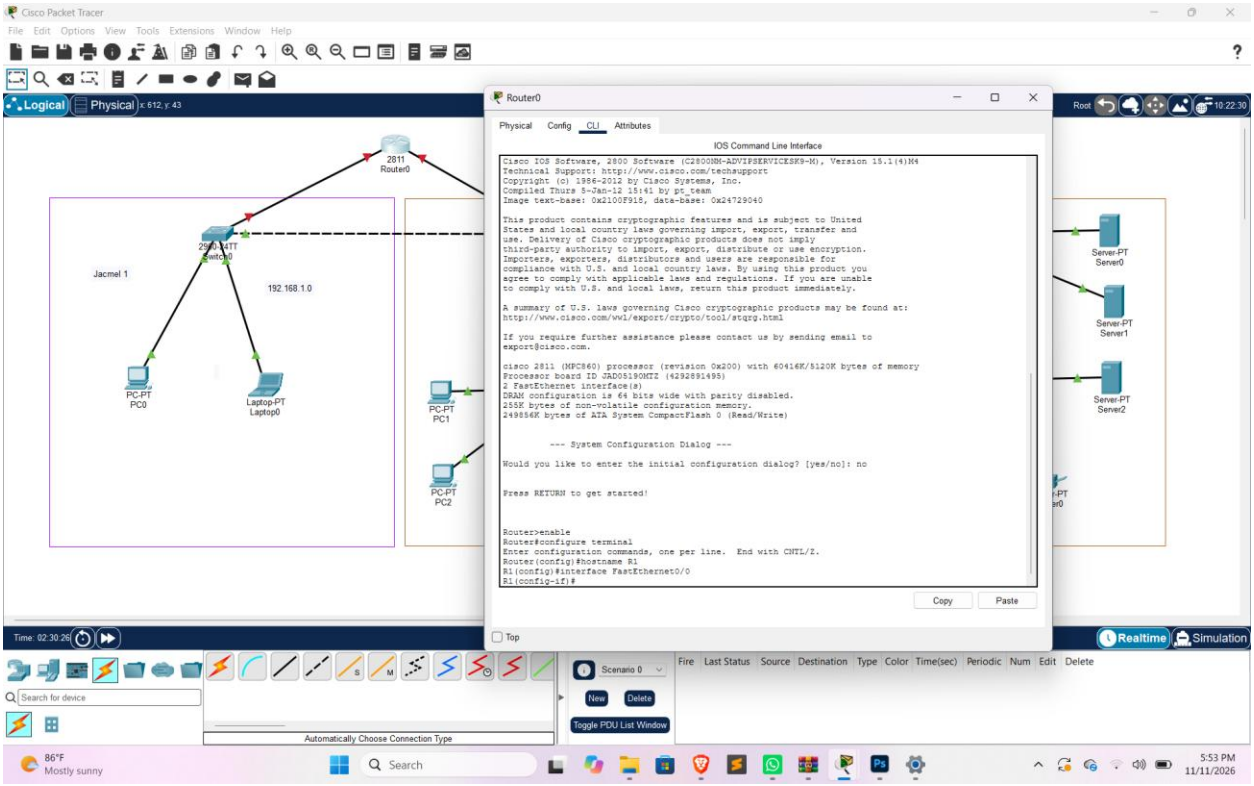

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical x: 327, y: 179
Root 19:34:30
2811 Router0
Jacmel 1
PC-PT PC0
Device Name: Switch0
Custom Device Model: 2960 IOS15
Hostname: SW-Jacmel-1
Port Link VLAN IP Address MAC Address
FastEthernet0/1 Down 1 -- 0010.1158.8801
FastEthernet0/2 Up 1 -- 0010.1158.8802
FastEthernet0/3 Up 1 -- 0010.1158.8803
FastEthernet0/4 Up 1 -- 0010.1158.8804
FastEthernet0/5 Down 1 -- 0010.1158.8805
FastEthernet0/6 Down 1 -- 0010.1158.8806
FastEthernet0/7 Down 1 -- 0010.1158.8807
FastEthernet0/8 Down 1 -- 0010.1158.8808
FastEthernet0/9 Down 1 -- 0010.1158.8809
FastEthernet0/10 Down 1 -- 0010.1158.880A
FastEthernet0/11 Down 1 -- 0010.1158.880B
FastEthernet0/12 Down 1 -- 0010.1158.880C
FastEthernet0/13 Down 1 -- 0010.1158.880D
FastEthernet0/14 Down 1 -- 0010.1158.880E
FastEthernet0/15 Down 1 -- 0010.1158.880F
FastEthernet0/16 Down 1 -- 0010.1158.8810
FastEthernet0/17 Down 1 -- 0010.1158.8811
FastEthernet0/18 Down 1 -- 0010.1158.8812
FastEthernet0/19 Down 1 -- 0010.1158.8813
FastEthernet0/20 Down 1 -- 0010.1158.8814
FastEthernet0/21 Down 1 -- 0010.1158.8815
FastEthernet0/22 Down 1 -- 0010.1158.8816
FastEthernet0/23 Down 1 -- 0010.1158.8817
FastEthernet0/24 Down 1 -- 0010.1158.8818
GigabitEthernet0/1 Down 1 -- 0010.1158.8819
GigabitEthernet0/2 Down 1 -- 0010.1158.881A
Vlan1 Up 1 192.168.1.2/24 00E0.8FA1.0E4D
Physical Location: Intercity > Home City > Corporate Office > Main Wiring Closet > Rack > Switch0
192.168.2.0
Jacmel 2
2960-24TT Switch3
Server-PT Server0
Server-PT Server1
Server-PT Server2
2960-24TT Switch4
Printer-PT Printer0
Home-VoIP-PT Home VoIP0
Time: 02:01:22
Realtime Simulation
Scenario 0
New Delete
Toggle PDU List Window
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
Automatically Choose Connection Type
86°F Mostly sunny
Search
5:23 PM 11/11/2026

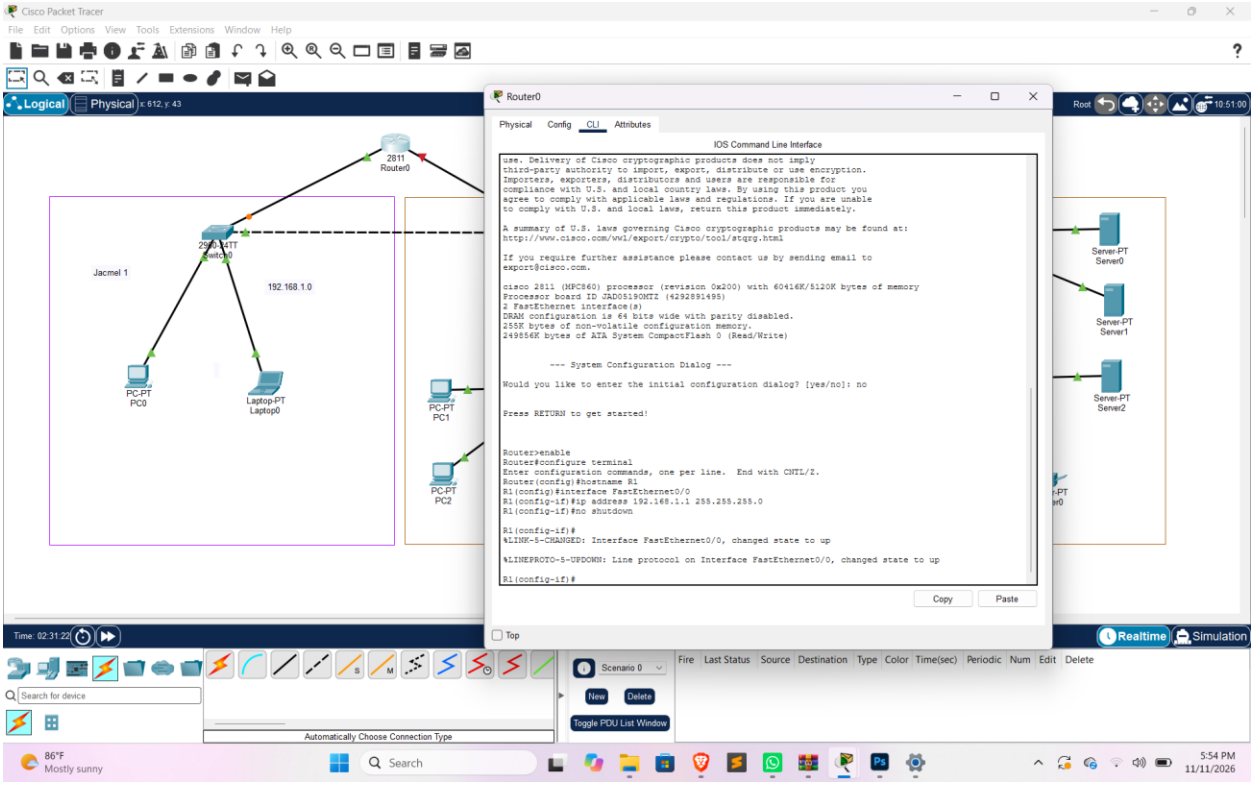

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical x: 850, y: 186
Root 19:42:30
2811 Router0
Jacmel 1
192.168.1.0
PC-PT PC0
Laptop-PT Laptop0
PC-PT PC1
PC-PT PC2
Device Name: Switch1
Custom Device Model: 2960 IOS15
Hostname: SW-Jacmel-2.1
Port Link VLAN IP Address MAC Address
FastEthernet0/1 Down 1 -- 0060.2FD1.0301
FastEthernet0/2 Up 1 -- 0060.2FD1.0302
FastEthernet0/3 Up 1 -- 0060.2FD1.0303
FastEthernet0/4 Up 1 -- 0060.2FD1.0304
FastEthernet0/5 Down 1 -- 0060.2FD1.0305
FastEthernet0/6 Down 1 -- 0060.2FD1.0306
FastEthernet0/7 Down 1 -- 0060.2FD1.0307
FastEthernet0/8 Down 1 -- 0060.2FD1.0308
FastEthernet0/9 Down 1 -- 0060.2FD1.0309
FastEthernet0/10 Down 1 -- 0060.2FD1.030A
FastEthernet0/11 Down 1 -- 0060.2FD1.030B
FastEthernet0/12 Down 1 -- 0060.2FD1.030C
FastEthernet0/13 Down 1 -- 0060.2FD1.030D
FastEthernet0/14 Down 1 -- 0060.2FD1.030E
FastEthernet0/15 Down 1 -- 0060.2FD1.030F
FastEthernet0/16 Down 1 -- 0060.2FD1.0310
FastEthernet0/17 Down 1 -- 0060.2FD1.0311
FastEthernet0/18 Down 1 -- 0060.2FD1.0312
FastEthernet0/19 Down 1 -- 0060.2FD1.0313
FastEthernet0/20 Down 1 -- 0060.2FD1.0314
FastEthernet0/21 Down 1 -- 0060.2FD1.0315
FastEthernet0/22 Down 1 -- 0060.2FD1.0316
FastEthernet0/23 Down 1 -- 0060.2FD1.0317
FastEthernet0/24 Down 1 -- 0060.2FD1.0318
GigabitEthernet0/1 Down 1 -- 0060.2FD1.0319
GigabitEthernet0/2 Down 1 -- 0060.2FD1.031A
Vlan1 Up 1 192.168.2.2/24 0001.964E.8B1B
Physical Location: Intercity > Home City > Corporate Office > Main Wiring Closet > Rack > Switch1
Server-PT Server0
Server-PT Server1
Server-PT Server2
Time: 02:01:38
Realtime Simulation
Scenario 0
New Delete
Toggle PDU List Window
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
Automatically Choose Connection Type
86°F Mostly sunny
Search
5:24 PM 11/11/2026

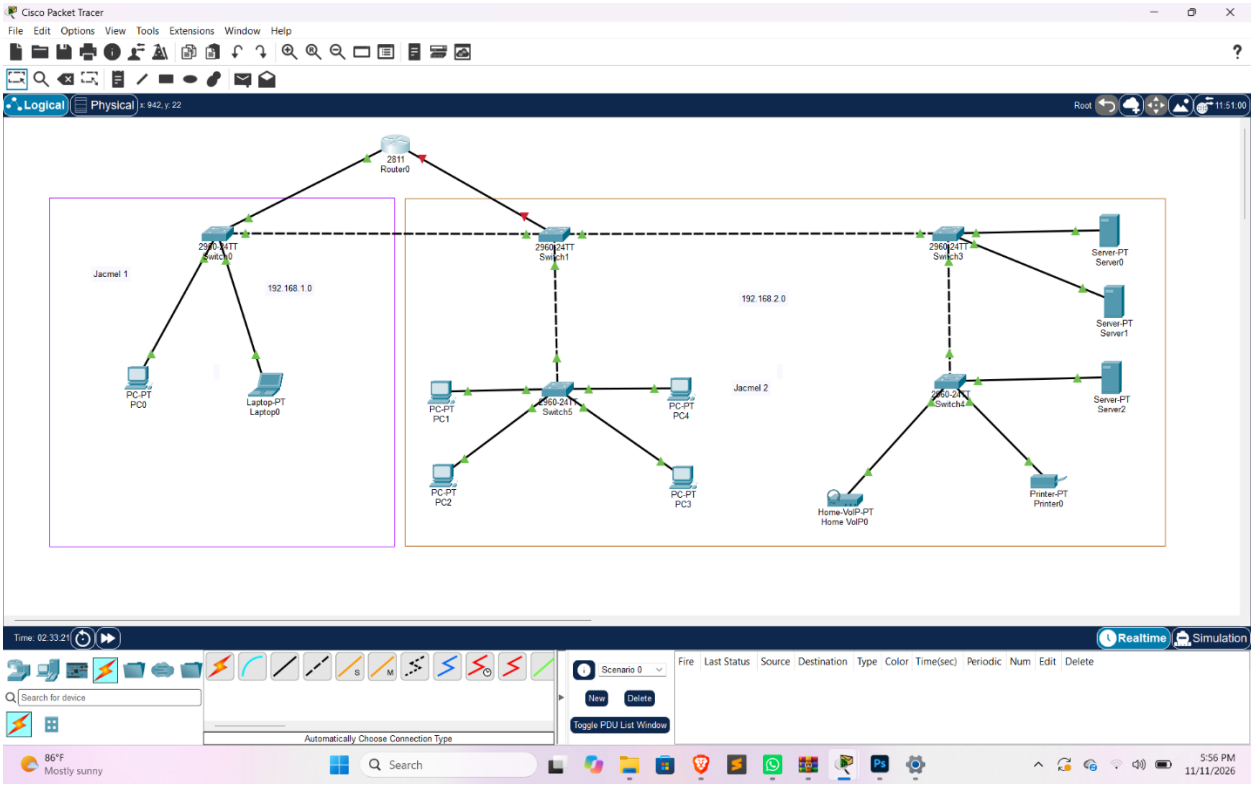

Cisco Packet Tracer
PC0
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.2.6
Pinging 192.168.2.6 with 32 bytes of data:
Request timed out.
Request timed out.
Request timed out.
Request timed out.
Ping statistics for 192.168.2.6:
Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
C:\>
Top
Jacmel 1
192.168.1.0
PC-PT PC0
Laptop-PT Laptop0
Server-PT Server0
Server-PT Server1
Server-PT Server2
Printer-PT Printer0
Realtime
Simulation
Automatically Choose Connection Type
86°F Mostly sunny
Search
5:49 PM 11/11/2026

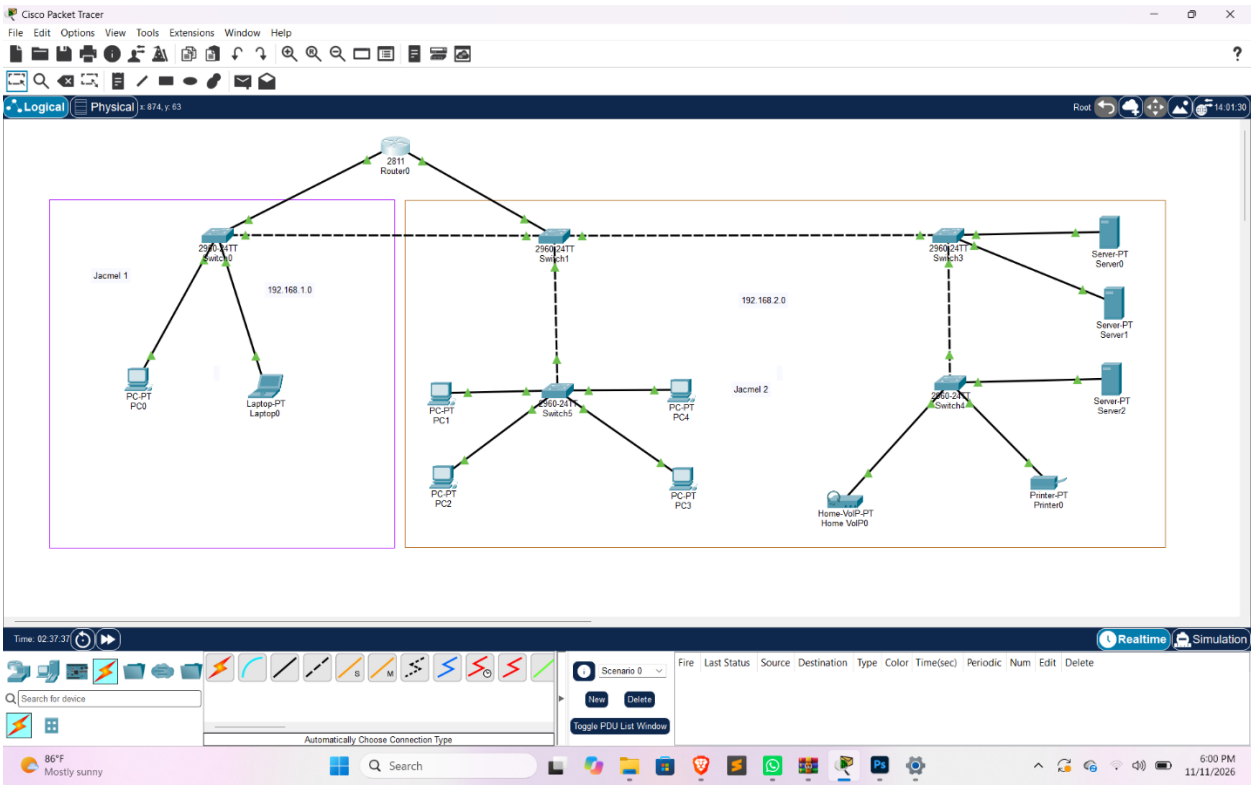

Cisco Packet Tracer
Laptop0
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.3
Pinging 192.168.1.3 with 32 bytes of data:
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Ping statistics for 192.168.1.3:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>
Top
Jacmel 1
192.168.1.0
PC-PT PC0
Laptop-PT Laptop0
Server-PT Server0
Server-PT Server1
Server-PT Server2
Printer-PT Printer0
Realtime
Simulation
Automatically Choose Connection Type
86°F Mostly sunny
Search
5:50 PM 11/11/2026

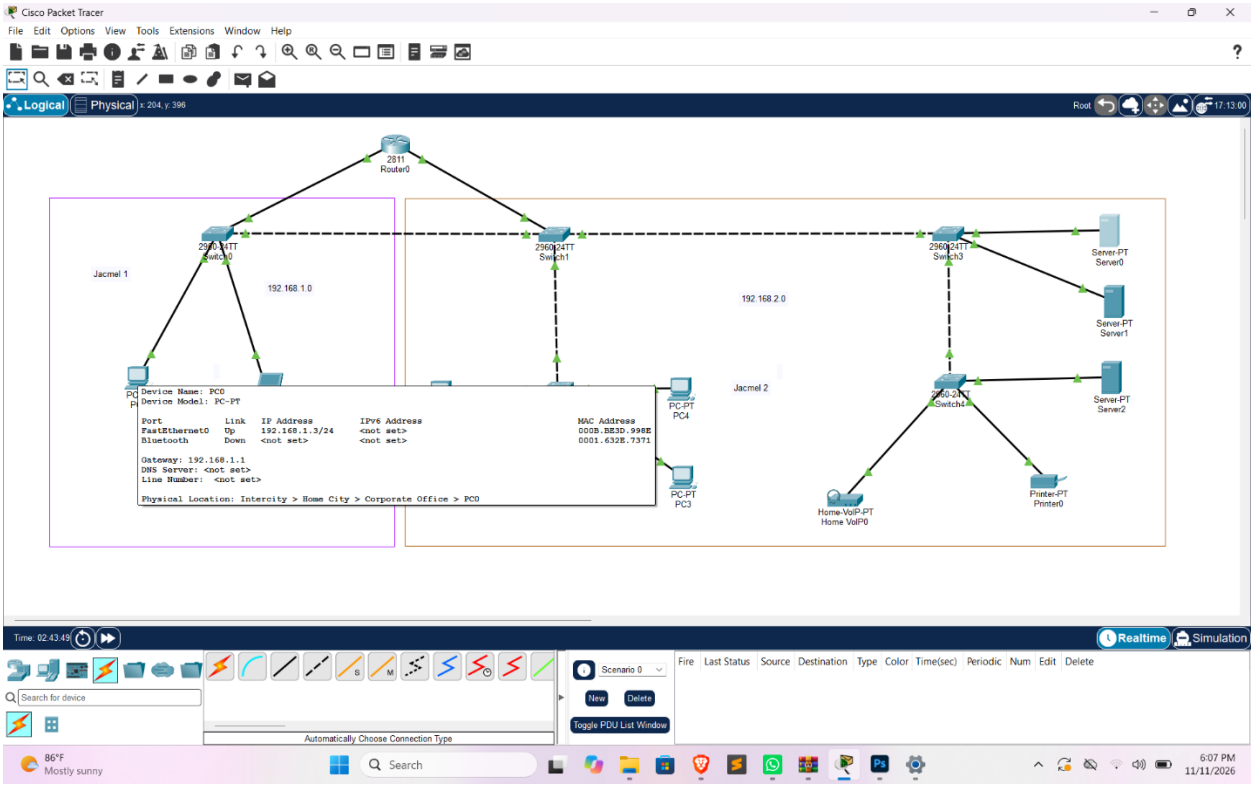

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
PC4
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.2.11
Pinging 192.168.2.11 with 32 bytes of data:
Reply from 192.168.2.11: bytes=32 time=10ms TTL=128
Reply from 192.168.2.11: bytes=32 time<1ms TTL=128
Reply from 192.168.2.11: bytes=32 time<1ms TTL=128
Reply from 192.168.2.11: bytes=32 time<1ms TTL=128
Ping statistics for 192.168.2.11:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 10ms, Average = 2ms
C:\>
Top
Jacmel 1
192.168.1.0
PC-PT PC0
Laptop-PT Laptop0
Server-PT Server0
Server-PT Server1
Server-PT Server2
Printer-PT Printer0
Realtime Simulation
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
Scenario 0
New Delete
Toggle PDU List Window
Automatically Choose Connection Type
86°F Mostly sunny
Search
5:50 PM 11/11/2026

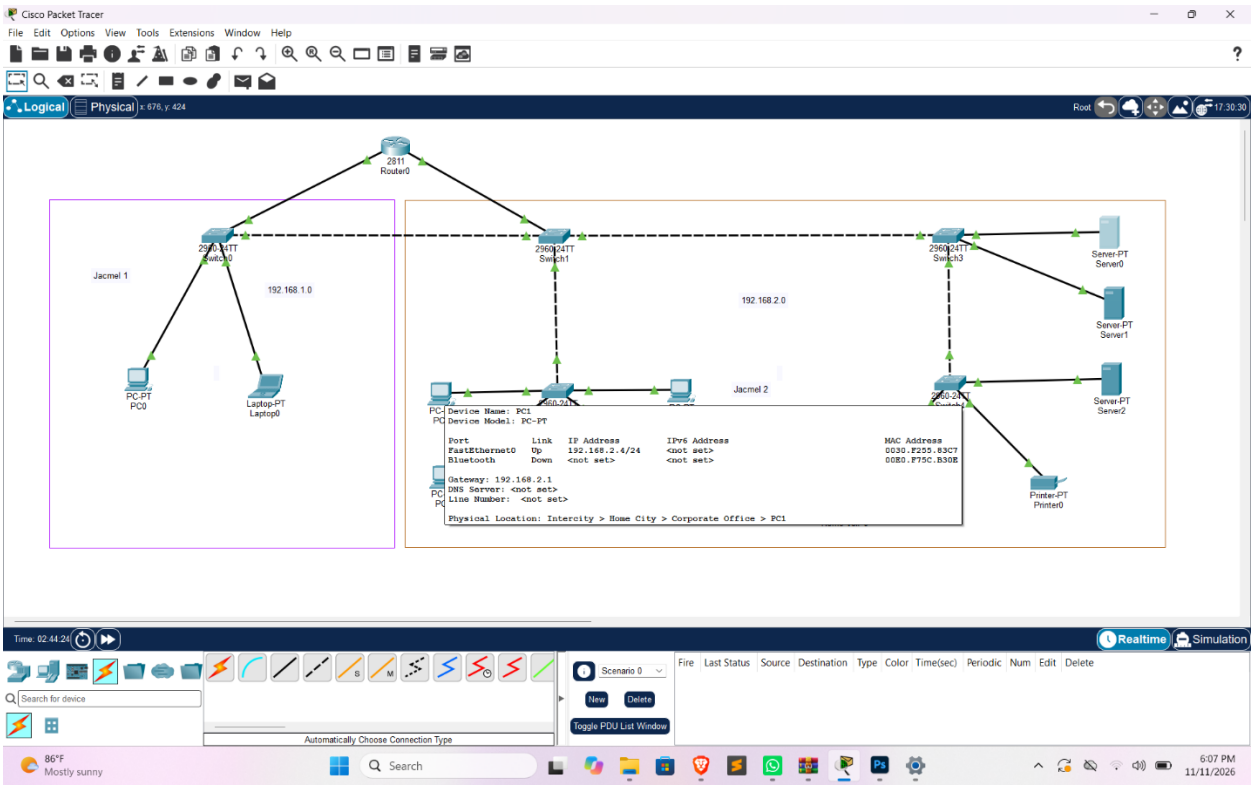

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
Router0
Physical Config CLI Attributes
IOS Command Line Interface
Cisco IOS Software, 2800 Software (C2800NM-ADVIPSERVICESK9-M), Version 15.1(4)M4
Technical Support: http://www.cisco.com/techsupport
Copyright (c) 1986-2012 by Cisco Systems, Inc.
Compiled Thurs 5-Jan-12 15:41 by pt_team
Image text-base: 0x2100F918, data-base: 0x24729040
This product contains cryptographic features and is subject to United
States and local country laws governing import, export, transfer and
use. Delivery of Cisco cryptographic products does not imply
third-party authority to import, export, distribute or use encryption.
Importers, exporters, distributors and users are responsible for
compliance with U.S. and local country laws. By using this product you
agree to comply with applicable laws and regulations. If you are unable
to comply with U.S. and local laws, return this product immediately.
A summary of U.S. laws governing Cisco cryptographic products may be found at:
http://www.cisco.com/wwl/export/crypto/tool/stqrg.html
If you require further assistance please contact us by sending email to
export@cisco.com.
cisco 2811 (MPC860) processor (revision 0x200) with 60416K/5120K bytes of memory
Processor board ID JAD05190MTZ (4292891495)
2 FastEthernet interface(s)
DRAM configuration is 64 bits wide with parity disabled.
255K bytes of non-volatile configuration memory.
249856K bytes of ATA System CompactFlash 0 (Read/Write)
--- System Configuration Dialog ---
Would you like to enter the initial configuration dialog? [yes/no]: no
Press RETURN to get started!
Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#hostname R1
R1(config)#interface FastEthernet0/0
R1(config-if)#
Copy Paste
Top
2811 Router0
Jacmel 1
192.168.1.0
PC-PT PC0
Laptop-PT Laptop0
PC-PT PC1
PC-PT PC2
Server-PT Server0
Server-PT Server1
Server-PT Server2
Realtime Simulation
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
Scenario 0
New Delete
Toggle PDU List Window
Automatically Choose Connection Type
86°F Mostly sunny
Search
5:53 PM 11/11/2026

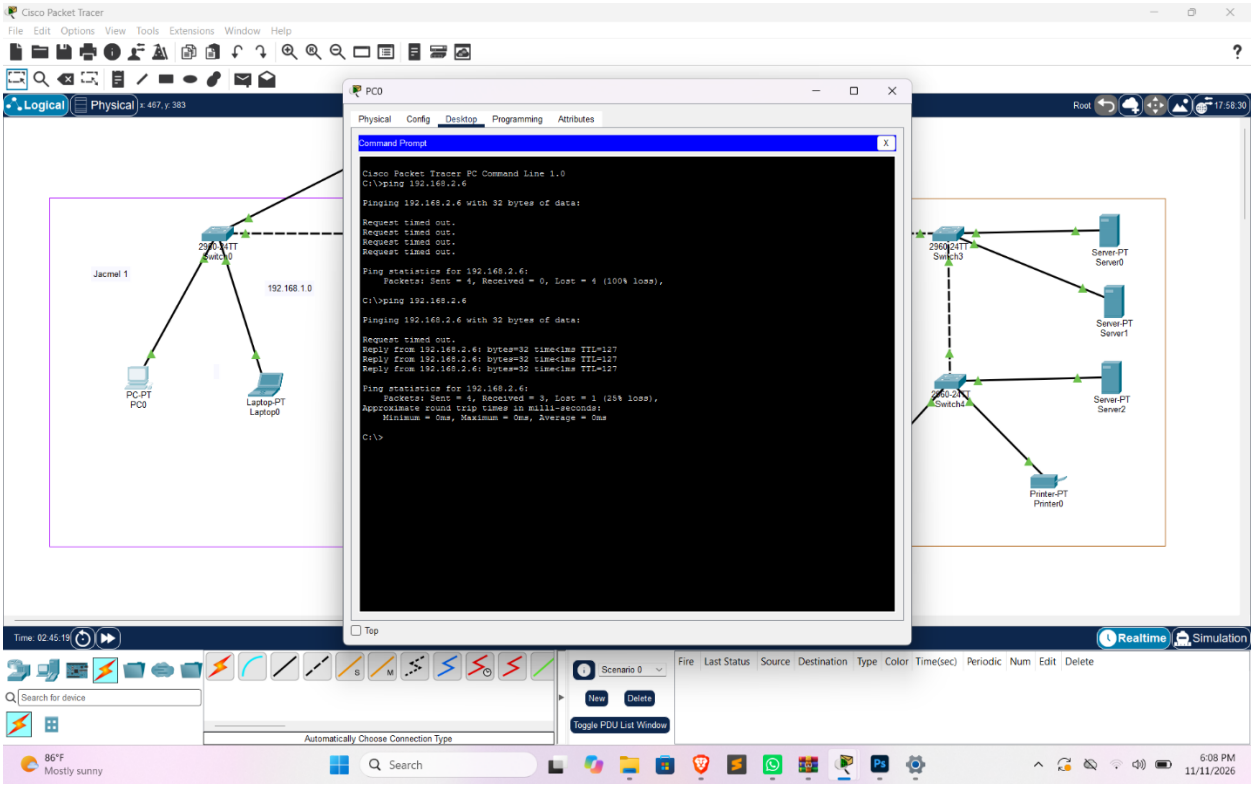

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
Router0
Physical Config CLI Attributes
IOS Command Line Interface
use. Delivery of Cisco cryptographic products does not imply
third-party authority to import, export, distribute or use encryption.
Importers, exporters, distributors and users are responsible for
compliance with U.S. and local country laws. By using this product you
agree to comply with applicable laws and regulations. If you are unable
to comply with U.S. and local laws, return this product immediately.
A summary of U.S. laws governing Cisco cryptographic products may be found at:
http://www.cisco.com/wwl/export/crypto/tool/stqrg.html
If you require further assistance please contact us by sending email to
export@cisco.com.
cisco 2811 (MPC860) processor (revision 0x200) with 60416K/5120K bytes of memory
Processor board ID JAD05190MTZ (4292891495)
2 FastEthernet interface(s)
DRAM configuration is 64 bits wide with parity disabled.
255K bytes of non-volatile configuration memory.
249856K bytes of ATA System CompactFlash 0 (Read/Write)
--- System Configuration Dialog ---
Would you like to enter the initial configuration dialog? [yes/no]: no
Press RETURN to get started!
Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#hostname R1
R1(config)#interface FastEthernet0/0
R1(config-if)#ip address 192.168.1.1 255.255.255.0
R1(config-if)#no shutdown
R1(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
R1(config-if)#
Copy Paste
Top
2811 Router0
2960-24TT Switch0
Jacmel 1
192.168.1.0
PC-PT PC0
Laptop-PT Laptop0
PC-PT PC1
PC-PT PC2
Server-PT Server0
Server-PT Server1
Server-PT Server2
Realtime Simulation
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
Scenario 0
New Delete
Toggle PDU List Window
Automatically Choose Connection Type
86°F Mostly sunny
Search
5:54 PM 11/11/2026

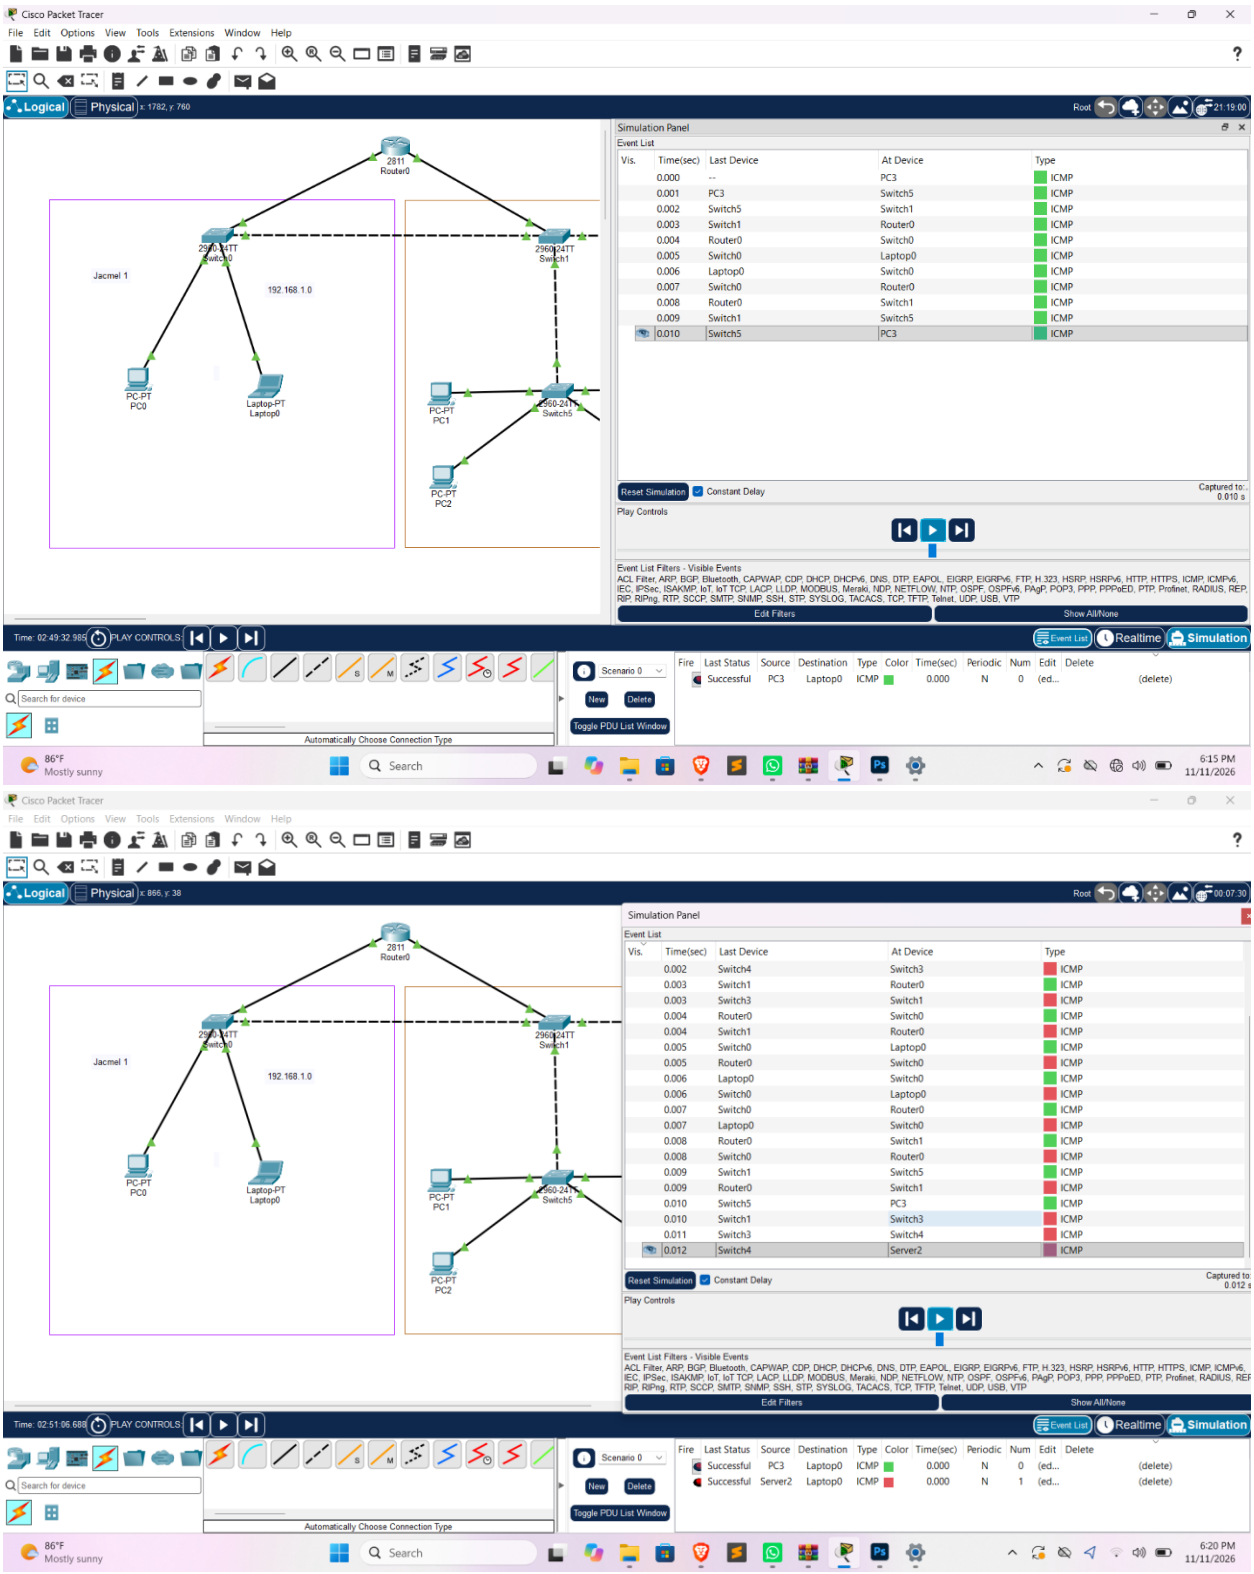

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
2811 Router0
2960-24TT Switch0
2960-24TT Switch1
2960-24TT Switch3
Jacmel 1
192.168.1.0
192.168.2.0
Jacmel 2
PC-PT PC0
Laptop-PT Laptop0
PC-PT PC1
PC-PT PC2
2960-24TT Switch5
PC-PT PC3
PC-PT PC4
2960-24TT Switch4
Server-PT Server0
Server-PT Server1
Server-PT Server2
Home-VoIP-PT Home VoIP0
Printer-PT Printer0
Realtime Simulation
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
Scenario 0
New Delete
Toggle PDU List Window
Automatically Choose Connection Type
86°F Mostly sunny
Search
5:56 PM 11/11/2026


Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
Root
2811
Router0
2960-24TT
Switch0
2960-24TT
Switch1
2960-24TT
Switch3
Server-PT
Server0
Server-PT
Server1
Jacmel 1
192.168.1.0
192.168.2.0
PC-PT
PC0
Laptop-PT
Laptop0
2960-24TT
Switch5
PC-PT
PC1
PC-PT
PC4
Jacmel 2
2960-24TT
Switch4
Server-PT
Server2
PC-PT
PC2
PC-PT
PC3
Home-VoIP-PT
Home VoIP0
Printer-PT
Printer0
Realtime
Simulation
Scenario 0
New
Delete
Toggle PDU List Window
Fire
Last Status
Source
Destination
Type
Color
Time(sec)
Periodic
Num
Edit
Delete
Automatically Choose Connection Type
Search for device
86°F
Mostly sunny
Search
6:00 PM
11/11/2026


Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
Root
2811
Router0
2960-24TT
Switch0
2960-24TT
Switch1
2960-24TT
Switch3
Server-PT
Server0
Server-PT
Server1
Jacmel 1
192.168.1.0
192.168.2.0
Device Name: PC0
Device Model: PC-PT
Port Link IP Address IPv6 Address MAC Address
FastEthernet0 Up 192.168.1.3/24 <not set> 000B.BE3D.998E
Bluetooth Down <not set> <not set> 0001.632E.7371
Gateway: 192.168.1.1
DNS Server: <not set>
Line Number: <not set>
Physical Location: Intercity > Home City > Corporate Office > PC0
PC-PT
PC4
PC-PT
PC3
Jacmel 2
2960-24TT
Switch4
Server-PT
Server2
Home-VoIP-PT
Home VoIP0
Printer-PT
Printer0
Realtime
Simulation
Scenario 0
New
Delete
Toggle PDU List Window
Fire
Last Status
Source
Destination
Type
Color
Time(sec)
Periodic
Num
Edit
Delete
Automatically Choose Connection Type
Search for device
86°F
Mostly sunny
Search
6:07 PM
11/11/2026


Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
2811 Router0
2960-24TT Switch0
2960-24TT Switch1
2960-24TT Switch3
Server-PT Server0
Server-PT Server1
Server-PT Server2
Jacmel 1
192.168.1.0
192.168.2.0
Jacmel 2
PC-PT PC0
Laptop-PT Laptop0
Printer-PT Printer0
Device Name: PC1
Device Model: PC-PT
Port Link IP Address IPv6 Address MAC Address
FastEthernet0 Up 192.168.2.4/24 <not set> 0030.F255.83C7
Bluetooth Down <not set> <not set> 00E0.F75C.B30E
Gateway: 192.168.2.1
DNS Server: <not set>
Line Number: <not set>
Physical Location: Intercity > Home City > Corporate Office > PC1
Realtime Simulation
Scenario 0 New Delete Toggle PDU List Window
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
Automatically Choose Connection Type
86°F Mostly sunny
Search
6:07 PM 11/11/2026


Cisco Packet Tracer
PC0
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.2.6
Pinging 192.168.2.6 with 32 bytes of data:
Request timed out.
Request timed out.
Request timed out.
Request timed out.
Ping statistics for 192.168.2.6:
Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
C:\>ping 192.168.2.6
Pinging 192.168.2.6 with 32 bytes of data:
Request timed out.
Reply from 192.168.2.6: bytes=32 time<1ms TTL=127
Reply from 192.168.2.6: bytes=32 time<1ms TTL=127
Reply from 192.168.2.6: bytes=32 time<1ms TTL=127
Ping statistics for 192.168.2.6:
Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>
Top
Jacmel 1
192.168.1.0
Realtime Simulation
Scenario 0 New Delete Toggle PDU List Window
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
Automatically Choose Connection Type
86°F Mostly sunny
Search
6:08 PM 11/11/2026







Ici on remarque que les appareils de deux Vlan différents peuvent se connecter sans aucun problème et cette connexion s'est fait grâce aux passerelles du routeur.

## Conclusion

Ce TD m’a permis de me familiariser avec la configuration de base des switchs et du routeur dans Cisco Packet Tracer. Il met en pratique l’attribution des adresses IPv4 et IPv6, la configuration des interfaces, la definition d’une passerelle et la vérification de la connectivité avec ping. Le Mode Simulation aide à visualiser le parcours des paquets et à mieux comprendre les échanges sur le réseau. La réussite effective des tests et les difficultés rencontrées doivent être confirmées à partir des captures et des manipulations réalisées.