




INSTRUMENTS

- OSCILLOSCOPE
- LOGIC ANALYSER
- COUNTER TIMER
- VIRTUAL TERMINAL**
- SPI DEBUGGER
- I2C DEBUGGER
- SIGNAL GENERATOR
- PATTERN GENERATOR
- DC VOLTMETER
- DC AMMETER
- AC VOLTMETER
- AC AMMETER
- WATTMETER

```

Virtual Terminal
0 Motion absent!
1 Motion detected!
1 Motion detected!
1 Motion detected!
0 Motion absent!
0 Motion absent!
0 Motion absent!
    
```

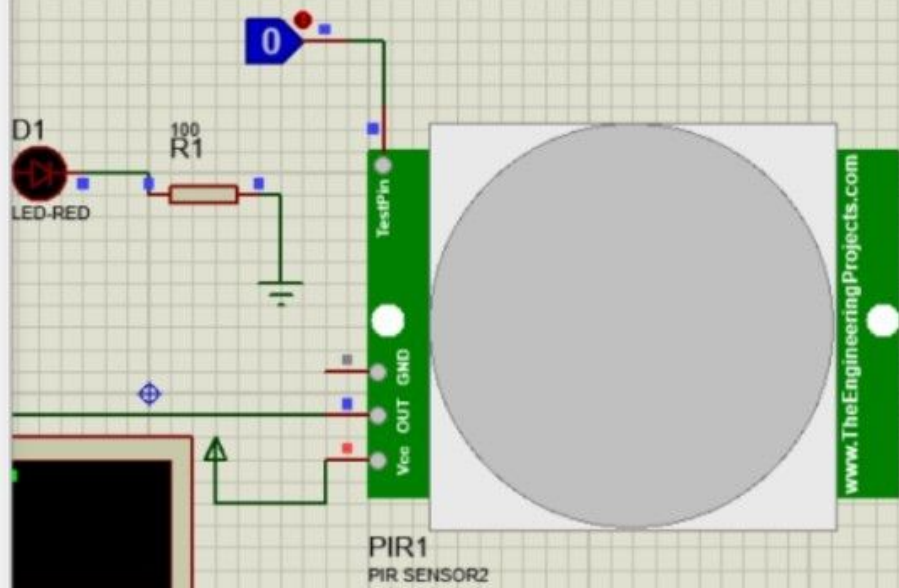



sketch_aug04a

```
int Status = 13; // Digital pin D6
int sensor = 12; // Digital pin D7
void setup() {
  Serial.begin(9600);
  pinMode(sensor, INPUT); // declare sensor as input
  pinMode(Status, OUTPUT); // declare LED as output
}

void loop() {
  long state = digitalRead(sensor);
  Serial.println(state);
  if(state == HIGH) {
    digitalWrite (Status, HIGH);
    Serial.println("Motion detected!");
    delay(1000);
  }
  else {
    digitalWrite (Status, LOW);
    Serial.println("Motion absent!");
    delay(1000);
  }
}
```

Done compiling.

Sketch uses 2246 bytes (6%) of program storage space. Maximum is 32256 bytes.

Global variables use 220 bytes (10%) of dynamic memory, leaving 1828 bytes for local variables. Maximum is 2048 bytes.