


About: With over 35 years of industry experience, SS Airtech Solutions provides reliable and energy-efficient compressed air and energy management solutions that improve productivity, reduce operating costs, and enhance equipment performance.

Our SOLLANT Partnership: Shanghai SOLLANT Energy Saving Technology Co., Ltd. is a leading manufacturer of energy-efficient compressed air systems, offering high-performance solutions for diverse industrial applications.

SOLLANT Product Range

- Fixed Speed & PM VSD Screw Compressors | Two-Stage PM VSD Compressors | Air Dryers, Filters & Air Treatment Systems | Genuine Spare Parts | Complete Compressed Air System Solutions | Reliable Air—Lower Energy. Better Performance.

4 -IN-1 AIR COMPRESSOR

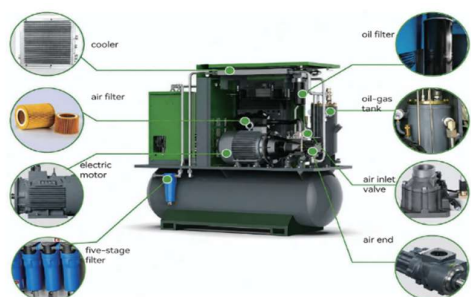

WHY CHOOSE A 4-IN-1 AIR COMPRESSOR?

1. Integrated design with beautiful appearance, fewer parts, and connectors reduce the possibility of unit failure and leakage; direct discharge of dry compressed air, fully guarantee the quality of user terminal gas; greatly save customer installation costs and use space.
2. With new modular design structure, compact layout, ready to install and work.
3. After strict testing of the unit, the vibration value of the unit is far lower than the international standard.
4. The integrated and optimized pipeline design reduces the length and number of pipelines, thereby reducing the incidence of pipeline leakage and internal losses caused by the pipeline system.
5. Adopting a freeze dryer with excellent performance, a compact rotary refrigeration compressor, and a high cooling capacity configuration scheme to ensure reliable operation under high-temperature conditions.

Model	Power		Capacity		Working pressure (Bar)	AIR TANK CAPACITY(L)	Air outlet diameter	Noise level (db)	Lubricant oil volume (L)	Drive Method	Start Method	External Dimensions (L*W*H (mm))	Weight kg
	Kw	Hp	M3/min	Cfm									
SLT-7.5F	7.5	10	1.1	39	8	285	G/3/4	60 ± 2	10	DD/BD	Star delta	1560*710*1450	370
			0.9	32	10								370
			0.63	22	12								370
SLT-11F	11	15	1.75	62	8	325	G/3/4	62 ± 2	16	DD/BD	Star delta	1780*740*1610	550
			1.65	58	10								550
			1.1	39	12								550
SLT-15F	15	20	0.88	31	16	325	G/3/4	62 ± 2	16	Direct Drive	Star delta	1780*740*1610	550
			2.44	86	8								550
			2.2	78	10								550
SLT-18F	18.5	25	1.87	66	12	325	G/3/4	62 ± 2	16	DD/BD	Star delta	1780*740*1611	550
			1.1	39	16								550
			3	106	8								900
SLT-22F	22	30	2.7	95	10	800	G/3/4	64 ± 2	16	DD/BD	Star delta	2200*1030*1830	900
			2.3	81	12								900
			1.85	65	16								900
SLT-22F	22	30	3.6	127	8	800	G1	64 ± 2	20	DD/BD	Star delta	2200*1030*1830	900
			3.2	113	10								900
			2.6	92	12								900
SLT-22F	22	30	2.3	81.21	16	800	G1	64 ± 2	20	Direct Drive	Star delta	2200*1030*1830	900

Model	Power		Capacity		Working pressure (Bar)	AIR TANK CAPACITY(L)	Air outlet diameter	Noise level (db)	Lubricant oil volume (L)	Drive Method	Start Method	External Dimensions (L*W*H (mm))	Weight kg
	Kw	Hp	M3/min	Cfm									
SLT-7.5F	7.5	10	0.49	1.1	17	285	G/3/4	60 ± 2	10	DD	Y/Δ	1560*710*1540	370
			0.4	0.9	14								370
			0.28	0.63	10								370
SLT-11F	11	15	0.78	1.75	28	325	G/3/4	62 ± 2	16	DD	Y/Δ	1780*740*1610	550
			0.74	1.65	26								550
			0.49	1.1	17								550
SLT-15F	15	20	0.39	0.88	13.77	325	G/3/4	62 ± 2	16	DD	Y/Δ	1780*740*1610	550
			1.1	2.44	39								550
			0.99	2.2	35								550
SLT-18F	18.5	25	0.84	1.87	30	325	G/3/4	62 ± 2	16	DD	Y/Δ	1780*740*1611	550
			0.49	1.1	17.30								550
			1.35	3.0	48								900
SLT-22F	22	30	1.21	2.7	43	800	G/3/4	64 ± 2	16	DD	Y/Δ	2200*1030*1830	900
			1.03	2.3	36								900
			0.83	1.85	29.31								900
SLT-22F	22	30	1.62	3.6	57	800	G1	64 ± 2	20	DD	Y/Δ	2200*1030*1830	900
			1.44	3.2	51								900
			1.17	2.6	41								900
SLT-22F	22	30	1.03	2.3	36.37	800	G1	64 ± 2	20	DD	Y/Δ	2200*1030*1830	900

SS AIRTECH SOLUTIONS

📍 No.8/1, Gandhi Nagar, Megarali Street, Vellalore, Coimbatore - 641 111.


☎ +91 97900 29225 | +91 80722 92336 | +91 97900 29316 | +91 97872 69916

support@ssairtechsolutions.com

com



FIXED & PM VSD SCREW AIR COMPRESSOR

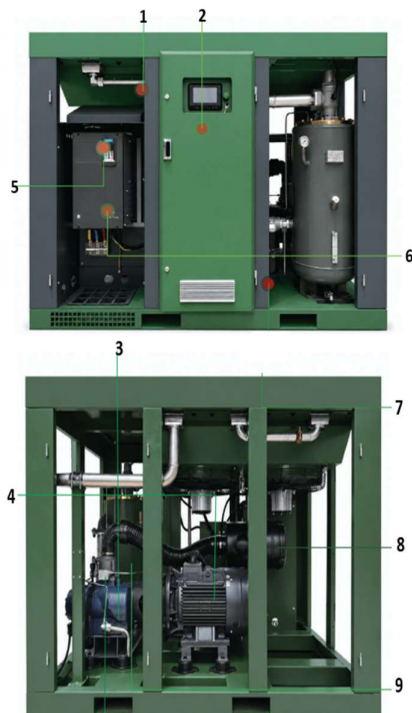

COOLER

1. The heat exchanger uses high-quality raw materials and a unique internal channel design, which increases the heat exchange area and can effectively dissipate heat for the air compressor.
2. The inner wall of the heat exchanger is treated with corrosion protection to increase the service life of the heat exchanger and increase the heat transfer effect.
3. The radiator has passed the strict factory test, and the quality is reliable, which effectively prevents the high temperature of the air compressor and increases the service life of the machine.



CONTROLLER

1. Adopts PLC multilingual control system, beautiful and intuitive interface, easy to operate function, operators can quickly and easily adjust the compressor.
2. 14 protection functions such as overload protection, short circuit protection, reverse protection, low temperature protection, high voltage protection, etc. to fully protect the unit.
3. The advanced microcomputer control drive system realizes intelligent control, air volume variable speed control, automatic adjustment of load start and soft start. Intelligent dynamic control, dynamic display of the working status of each component of the compressor, visual pressure, temperature, current working curve, etc.
4. Large memory and equipped with printer interface; It can use computer remote monitoring or multiple linkage control between air compressors.



AIR-END

1. Adopts the international top-level third-generation asymmetric wire twin-screw air end adheres to the exquisite manufacturing process adopts the peak high efficiency low-pressure, high-efficiency tooth shape and the axial air inlet design.
2. Optimized flow channel design, with a large rotor, low speed and high efficiency. Increased energy efficiency by 5% -15% compared to the second generation.
3. Uses Swedish SKF heavy-duty bearings, double-lip lip shaft seal, durable and reliable. The bearing design life is 80,000-100,000 hours and the air end design life is about 200,000 hours.



OIL FILTER

1. Adopts high-density filter material, the surface is treated with nano-electroplating.
2. The filter element has uniform pore size, small filter resistance, large flux, strong interception ability and long service life.
3. High filtration accuracy effectively filters impurities in lubricating oil, prolongs the service life of the equipment.



FAN

1. The fan uses a large fan design to effectively enhance the fan's heat dissipation effect. The motor adopts a special internal design to adapt to harsh working conditions.
2. The fan motor adopts special winding and high protection grade design to adapt to harsh working conditions.
3. The fan is controlled by the controller to realize the automatic start and stop function, which effectively maintains the normal working temperature of the air compressor lubricant.



INVERTER

1. The standard is equipped with high frequency reactor, effectively reducing the frequency converter and the external magnetic field dry reactance.
2. Reliably reduces peak current when it is started, realizes stable starting.
3. With high-performance current vector technology, it can easily drive induction motors.
4. High performance, high quality and high power density design, as well as significant improvements in usability, maintainability, environmental protection, installation space, and design standards, can further optimize the user experience.
5. Independent air duct design, resistance to all kinds of severe environmental pollution.
6. Rapidly track the change of pressure and control pressure fluctuation within $\pm 0.01\text{Mpa}$, optimal power is used to accurately provide necessary air.



MOTOR

1. The motor uses high-performance motors of well-known brands. Permanent magnet synchronous motors (PM motors) use high-performance NdFeB permanent magnets which will not lose magnetism under 200 ° and its service life reaches as long as 15 years.
2. The stator coil uses the frequency converter's special halo proof enameled wire, the insulation is outstanding and the service life is longer.
3. The motor has the function of temperature protection. It also has a wide range of motor speed regulation, high precision and wide range of volume regulation. The reliability is significantly improved with a small size, low noise and large excess current.
4. Protection grade IP55, insulation grade F, effectively protects the motor and increases the service life of the motor, the efficiency is 5%-7% higher than similar products.



AIR FILTER

Adopting a design with high dust holding capacity and low flow resistance, which can filter out tiny fixed particles in the air. The dust removal effect can reach 99.5%, ensuring the normal operation of the components of the system and extending the service life.



AIR-OIL SEPARATOR CORE

The high-quality air-oil separation element and gas-liquid filter element is equipped with advanced three-stage air-oil separation to keep the oil content below 3ppm to ensure the output of high-quality compressed air.



FIXED & PM VFD SPEED SCREW AIR

Model	Power		Capacity		Working pressure (Bar)	Air outlet diameter	Noise level (db)	Drive Method	Start Method	External Dimensions (L*W*H (mm))	Weight kg
	Kw	Hp	M3/min	Cfm							
SLT-7.5F	7.5	10	1.1	38.84	8	DN20	60 ± 2	Direct Drive	Star delta	950*687*930	213
			0.9	31.78	10						207
			0.63	22.25	13						207
SLT-11F	11	15	1.75	61.79	8	DN20	62 ± 2	Direct Drive	Star delta	1090*740*1065	317
			1.65	58.26	10						317
			1.1	38.84	13						317
			0.88	31.07	16						317
			2.44	86.16	8						356
SLT-15F	15	20	2.2	77.68	10	DN20	62 ± 2	Direct Drive	Star delta	1090*740*1065	317
			1.87	66.03	13						317
			1.1	38.84	16						317
			3	105.93	8						470
SLT-18F	18.5	25	2.7	95.34	10	DN25	64 ± 2	Direct Drive	Star delta	1335*900*1170	470
			2.3	81.21	13						470
			1.85	65.32	16						470
			3.6	127.12	8						470
SLT-22F	22	30	3.2	112.99	10	DN25	64 ± 2	Direct Drive	Star delta	1335*900*1170	470
			2.6	91.81	13						470
			2.3	81.21	16						470
			5	176.55	8						645
SLT-30F	30	40	4.5	158.90	10	DN40	66 ± 2	Direct Drive	Star delta	1510*1037*1275	645
			3.6	127.12	13						615
			2.94	103.81	16						615
			6.3	222.45	8						685
SLT-37F	37	50	5.6	197.74	10	DN40	66 ± 2	Direct Drive	Star delta	1510*1037*1275	685
			4.61	162.78	13						685
			3.4	120.05	16						685
			7.46	263.41	8						712
SLT-45F	45	60	6.25	220.69	10	DN40	66 ± 2	Direct Drive	Star delta	1510*1037*1275	712
			5.51	194.56	13						712
			5.22	184.32	16						712
			11.2	396.67	8						712