



FIXED SPEED SCREW AIR COMPRESSOR

COOLER

1. The heat exchanger uses high-quality raw materials and a unique internal channel design, which increases the heat exchange area and can effectively dissipate heat for the air compressor.
2. The inner wall of the heat exchanger is treated with corrosion protection to increase the service life of the heat exchanger and increase the heat transfer effect.
3. The radiator has passed the strict factory test, and the quality is reliable, which effectively prevents the high temperature of the air compressor and increases the service life of the machine.



AIR-END

1. Adopts the international top-level third-generation asymmetric wire twin-screw air end, adheres to the exquisite manufacturing process, adopts the peak high efficiency low-pressure, high-efficiency tooth shape and the axial air inlet design.
2. Optimized flow channel design, with a large rotor, low speed and high efficiency. Increased energy efficiency by 5%~15% compared to the second generation.
3. Uses Swedish SKF heavy-duty bearings, double-lip shaft seal, durable and reliable. The bearing design life is 80,000~100,000 hours and the air end design life is about 200,000 hours.



MOTOR

1. The motor uses high-performance motors of well-known brands. Permanent magnet synchronous motors (PM motors) use high-performance NdFeB permanent magnets which will not lose magnetism under 200° and its service life reaches as long as 15 years.
2. The stator coil uses the frequency converter special halo proof enameled wire, the insulation is outstanding and the service life is longer.
3. The motor has the function of temperature protection. It also has a wide range of motor speed regulation, high precision and wide range of volume regulation. The reliability is significantly improved with small size, low noise and large excess current.
4. Protection grade IP55, insulation grade F, effectively protects the motor and increases the service life of the motor, the efficiency is 5%~7% higher than similar products.



INTAKE VALVE

1. Intake valve is the core component to control the air intake of the air compressor.
2. Adopting the world famous brand air intake valve it can automatically adjust the air volume by 0~100% according to the requirement of the system air quantity. It promotes small pressure loss, stable action and long life consequently reducing operating costs.



CONTROLLER

1. Adopts PLC multilingual control system, beautiful and intuitive interface, easy to operate function, operators can quickly and easily adjust the compressor.
2. 14 protection functions such as overload protection, short circuit protection, reverse protection, low temperature protection, high voltage protection, etc. to fully protect the unit.
3. The advanced microcomputer control drive system realizes intelligent control, air volume variable speed control, automatic adjustment of load start and soft start. Intelligent dynamic control, dynamic display of the working status of each component of the compressor, visual pressure, temperature, current working curve, etc.
4. Large memory and equipped with printer interface, it can use computer remote monitoring or multiple linkage control between air compressors.



FAN

1. The fan uses a large fan design to enhance the fan's heat dissipation effect effectively. The motor adopts a special internal design to adapt to harsh working conditions.
2. The fan motor adopts special winding and high protection grade design to adapt to harsh working conditions.
3. The fan is controlled by the controller to realize the automatic start and stop function, which effectively maintains the normal working temperature of the air compressor lubricant.



OIL FILTER

1. Adopts high-density filter material, the surface is treated with nano-electroplating.
2. The filter element has uniform pore size, small filter resistance, large flux, strong interception ability and long service life.
3. High filtration accuracy effectively filters impurities in lubricating oil, prolongs the service life of the equipment.



AIR FILTER

- Adopting a design with high dust holding capacity and low flow resistance, which can filter out tiny fixed particles in the air. The dust removal effect can reach 99.5%, ensuring the normal operation of the components of the system and extending the service life.



AIR-OIL SEPARATOR CORE

- The high-quality air-oil separation element and gas-liquid filter element are equipped with advanced three-stage air-oil separation to keep the oil content below 3ppm to ensure the output of high-quality compressed air.



Model	Power		Capacity		Working pressure (Bar)	Air outlet diameter	Noise level (db)	Drive Method	Start Method	External Dimensions (L*W*H (mm))	Weight kg
	Kw	Hp	M3/min	Cfm							
SLT-7.5F	7.5	10	1.1	38.84	8	DN20	60 ± 2	Direct Drive	Star delta	950*687*930	213
			0.9	31.78	10						207
			0.63	22.25	13						207
SLT-11F	11	15	1.75	61.79	8	DN20	62 ± 2	Direct Drive	Star delta	1090*740*1065	317
			1.65	58.26	10						317
			1.1	38.84	13						317
			0.88	31.07	16						317
SLT-15F	15	20	2.44	86.16	8	DN20	62 ± 2	Direct Drive	Star delta	1090*740*1065	356
			2.2	77.68	10						317
			1.87	66.03	13						317
			1.1	38.84	16						317
			3	105.93	8						470
SLT-18F	18.5	25	2.7	95.34	10	DN25	64 ± 2	Direct Drive	Star delta	1335*900*1170	470
			2.3	81.21	13						470
			1.85	65.32	16						470
			3.6	127.12	8						470
SLT-22F	22	30	3.2	112.99	10	DN25	64 ± 2	Direct Drive	Star delta	1335*900*1170	470
			2.6	91.81	13						470
			2.3	81.21	16						470
SLT-30F	30	40	5	176.55	8	DN40	66 ± 2	Direct Drive	Star delta	1510*1037*1275	645
			4.5	158.90	10						645
			3.6	127.12	13						615
			2.94	103.81	16						615
SLT-37F	37	50	6.3	222.45	8	DN40	66 ± 2	Direct Drive	Star delta	1510*1037*1275	685
			5.6	197.74	10						685
			4.61	162.78	13						685
			3.4	120.05	16						685
			7.46	263.41	8						712
SLT-45F	45	60	6.25	220.69	10	DN40	66 ± 2	Direct Drive	Star delta	1510*1037*1275	712
			5.51	194.56	13						712
			5.22	184.32	16						712

SS AIRTECH SOLUTIONS

📍 No.8/1, Gandhi Nagar, Megarali Street, Vellalore, Coimbatore - 641 111.

☎ +91 97900 29225 | +91 80722 92336 | +91 97900 29316 | +91 97872 69916

✉ support@ssairtechsolutions.com



PM VSD SCREW AIR COMPRESSOR

COOLER

1. The heat exchanger uses high-quality raw materials and a unique internal channel design, which increases the heat exchange area and can effectively dissipate heat for the air compressor.
2. The inner wall of the heat exchanger is treated with corrosion protection to increase the service life of the heat exchanger and increase the heat transfer effect.
3. The radiator has passed the strict factory test, and the quality is reliable, which effectively prevents the high temperature of the air compressor and increases the service life of the machine.



FAN

1. The fan uses a large fan design to effectively enhance the fan's heat dissipation effect. The motor adopts a special internal design to adapt to harsh working conditions.
2. The fan motor adopts special winding and high protection grade design to adapt to harsh working conditions.
3. The fan is controlled by the controller to realize the automatic start and stop function, which effectively maintains the normal working temperature of the air compressor lubricant.



AIR-END

1. Adopts the international top-level third-generation asymmetric wire twin-screw air end adheres to the exquisite manufacturing process adopts the peak high efficiency low-pressure, high-efficiency tooth shape and the axial air inlet design.
2. Optimized flow channel design, with a large rotor, low speed and high efficiency. Increased energy efficiency by 5%~15% compared to the second generation.
3. Uses Swedish SKF heavy-duty bearings, double-lip lip shaft seal, durable and reliable. The bearing design life is 80,000~100,000 hours and the air end design life is about 200,000 hours.




MOTOR

1. The motor uses high-performance motors of well-known brands. Permanent magnet synchronous motors (PM motors) use high-performance NdFeB permanent magnets which will not lose magnetism under 200 ° and its service life reaches as long as 15 years.
2. The stator coil uses the frequency converter's special halo proof enameled wire, the insulation is outstanding and the service life is longer.
3. The motor has the function of temperature protection. It also has a wide range of motor speed regulation, high precision and wide range of volume regulation. The reliability is significantly improved with a small size, low noise and large excess current.
4. Protection grade IP55, insulation grade F, effectively protects the motor and increases the service life of the motor, the efficiency is 5%~7% higher than similar products.



INTAKE VALVE

1. Intake valve is the core component to control the air intake of the air compressor.
2. Adopting the world famous brand air intake valve, it can automatically adjust the air volume by 0~100% according to the requirement of the system air quantity. It promises small pressure loss, stable action and long life consequently reduced operating costs.

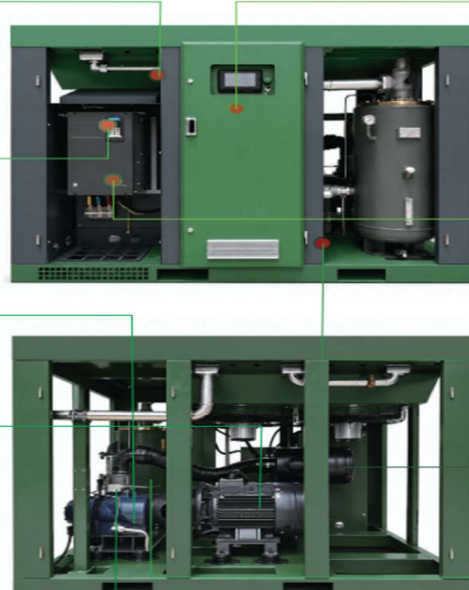

CONTROLLER

1. Adopts PLC multilingual control system, beautiful and intuitive interface, easy to operate function, operators can quickly and easily adjust the compressor.
2. 14 protection functions such as overload protection, short circuit protection, reverse protection, low temperature protection, high voltage protection, etc. to fully protect the unit.
3. The advanced microcomputer control drive system realizes intelligent control, air volume variable speed control, automatic adjustment of load start and soft start, intelligent dynamic control, dynamic display of the working status of each component of the compressor, visual pressure, temperature, current working curve, etc.
4. Large memory and equipped with printer interface; It can use computer remote monitoring or multiple linkage control between air compressors.



INVERTER

1. The standard is equipped with high frequency reactor, effectively reducing the frequency converter and the external magnetic field dry reaction.
2. Reliably reduces peak current when it is started, realizes stable starting.
3. With high-performance current vector technology, it can easily drive induction motors.
4. High performance, high quality and high power density design, as well as significant improvements in usability, maintainability, environmental protection, installation space, and design standards, can further optimize the user experience.
5. Independent air duct design, resistance to all kinds of severe environmental pollution.
6. Rapidly track the change of pressure and control pressure fluctuation within ±0.01Mpa, optimal power is used to accurately provide necessary air.



OIL FILTER

1. Adopts high-density filter material, the surface is treated with nano-electroplating.
2. The filter element has uniform pore size, small filter resistance, large flux, strong interception ability and long service life.
3. High filtration accuracy effectively filters impurities in lubricating oil, prolongs the service life of the equipment.



AIR FILTER

1. Adopting a design with high dust holding capacity and low flow resistance, which can filter out tiny fixed particles in the air. The dust removal effect can reach 99.5%, ensuring the normal operation of the components of the system and extending the service life.



AIR-OIL SEPARATOR CORE

1. The high-quality air-oil separation element and gas-liquid filter element is equipped with advanced three-stage air-oil separation to keep the oil content below 3ppm to ensure the output of high-quality compressed air.



Model	Power		Capacity				Working pressure (Bar)	Air outlet diameter	Noise level (db)	Drive Method	Start Method	External Dimensions (L*W*H (mm))	Weight kg
	Kw	Hp	M3/min	Cfm									
SLT-7.5V	7.5	10	0.49	1.1	17.30	38.84	8	DN20	60 ± 2	Direct Drive	PMVSD	950*687*930	213
			0.4	0.9	14.12	31.78	10						207
			0.28	0.63	9.89	22.25	13						207
SLT-11V	11	15	0.78	1.75	27.54	61.79	8	DN20	62 ± 2	Direct Drive	PMVSD	1090*740*1065	317
			0.74	1.65	26.13	58.26	10						317
			0.49	1.1	17.30	38.84	13						317
SLT-15V	15	20	0.39	0.88	13.77	31.07	16	DN20	62 ± 2	Direct Drive	PMVSD	1090*740*1065	317
			1.1	2.44	38.84	86.16	8						356
			0.99	2.2	34.96	77.68	10						317
SLT-18V	18.5	25	0.84	1.87	29.66	66.03	13	DN25	64 ± 2	Direct Drive	PMVSD	1335*900*1170	317
			0.49	1.1	17.30	38.84	16						470
			1.35	3.0	47.67	105.93	8						470
SLT-22V	22	30	1.21	2.7	42.73	95.34	10	DN25	64 ± 2	Direct Drive	PMVSD	1335*900*1170	470
			1.03	2.3	36.37	81.21	13						470
			0.83	1.85	29.31	65.32	16						470
SLT-30V	30	40	1.62	3.6	57.20	127.12	8	DN40	66 ± 2	Direct Drive	PMVSD	1510*1037*1275	470
			1.44	3.2	50.85	112.99	10						470
			1.17	2.6	41.31	91.81	13						470
SLT-37V	37	50	1.03	2.3	36.37	81.21	16	DN40	66 ± 2	Direct Drive	PMVSD	1510*1037*1275	470
			2.25	5.0	79.45	176.55	8						645
			2.02	4.5	71.33	158.90	10						645
SLT-45V	45	60	1.62	3.6	57.20	127.12	13	DN40	66 ± 2	Direct Drive	PMVSD	1510*1037*1275	615
			1.23	2.94	43.43	103.81	16						615
			2.83	6.3	99.93	222.45	8						685
SLT-45V	45	60	2.52	5.6	88.98	197.74	10	DN40	66 ± 2	Direct Drive	PMVSD	1510*1037*1275	685
			2.07	4.61	73.09	162.78	13						685
			1.53	1.4	54.02	49.43	16						685
SLT-45V	45	60	3.35	7.46	118.29	263.41	8	DN40	66 ± 2	Direct Drive	PMVSD	1510*1037*1275	712
			2.81	6.25	99.22	220.69	10						712
			2.47	5.51	87.22	194.56	12						712
SLT-45V	45	60	2.34	5.22	82.63	184.32	16	DN40	66 ± 2	Direct Drive	PMVSD	1510*1037*1275	712
													712
													712

SS AIRTECH SOLUTIONS

No.8/1, Gandhi Nagar, Megarali Street, Vellalore, Coimbatore - 641 111.

+91 97900 29225 | +91 80722 92336 | +91 97900 29316 | +91 97872 69916



support@ssairtechsolutions.com