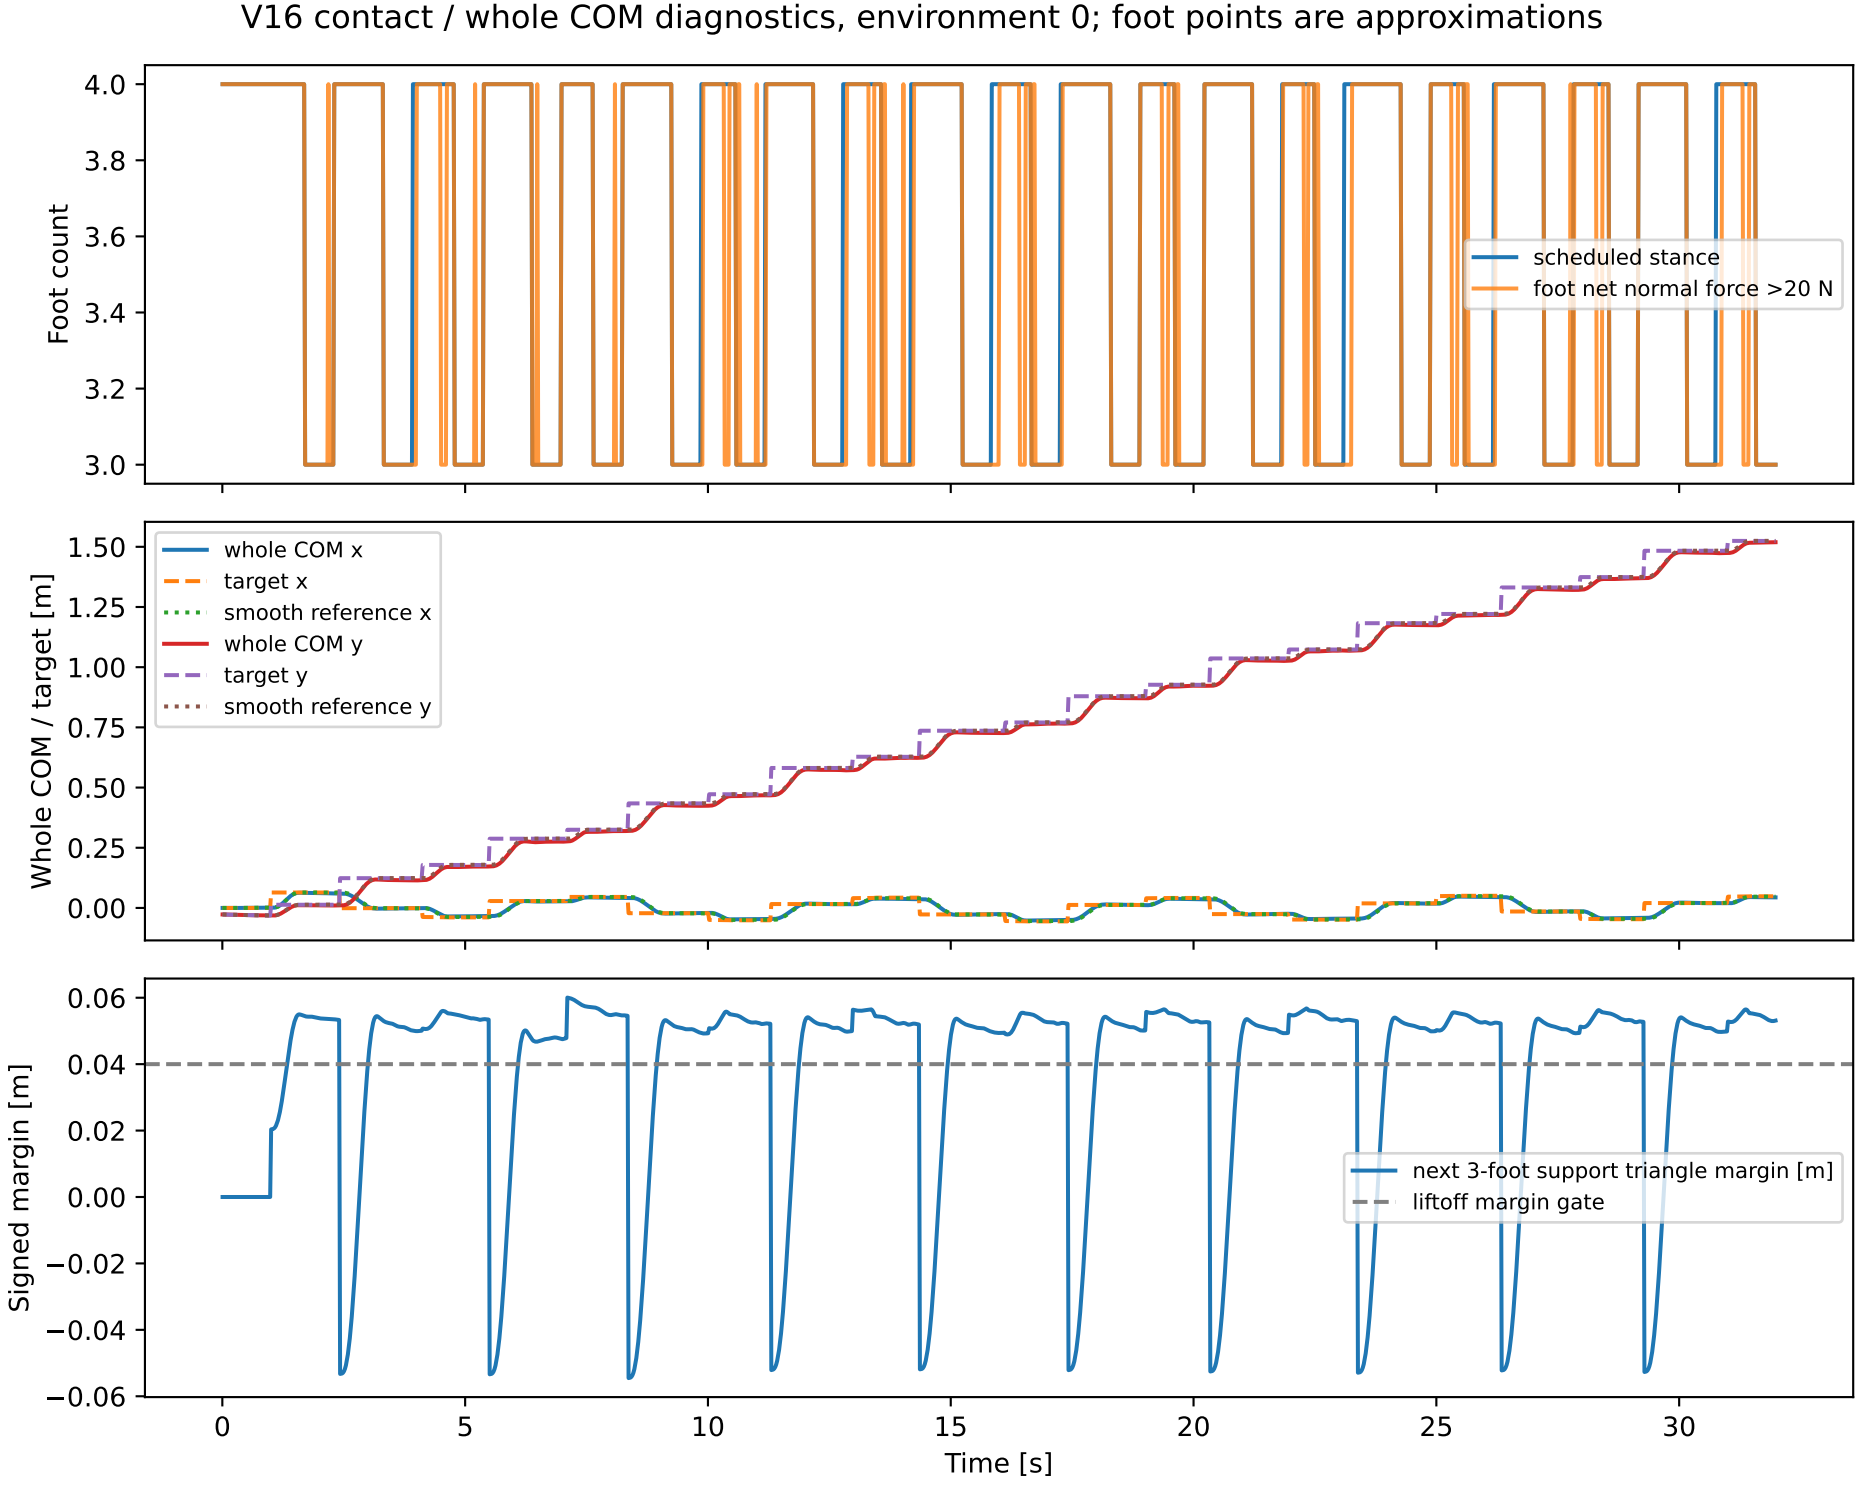
V16 contact / whole COM diagnostics, environment 0; foot points are approximations
Foot count
4.0
3.8
3.6
3.4
3.2
3.0
scheduled stance
foot net normal force >20 N
Whole COM / target [m]
1.50
1.25
1.00
0.75
0.50
0.25
0.00
whole COM x
target x
smooth reference x
whole COM y
target y
smooth reference y
Signed margin [m]
0.06
0.04
0.02
0.00
−0.02
−0.04
−0.06
next 3-foot support triangle margin [m]
liftoff margin gate
0
5
10
15
20
25
30
Time [s]