

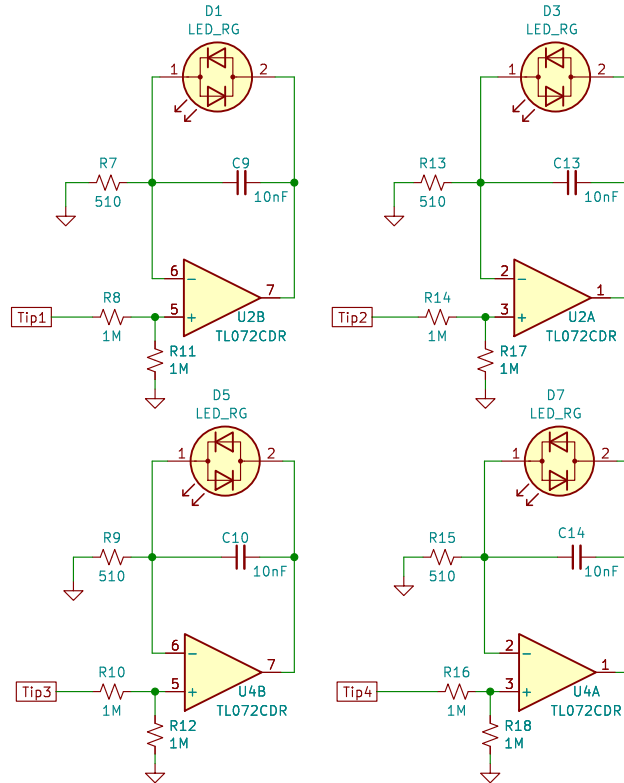
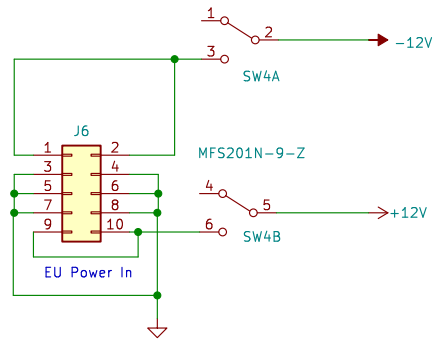
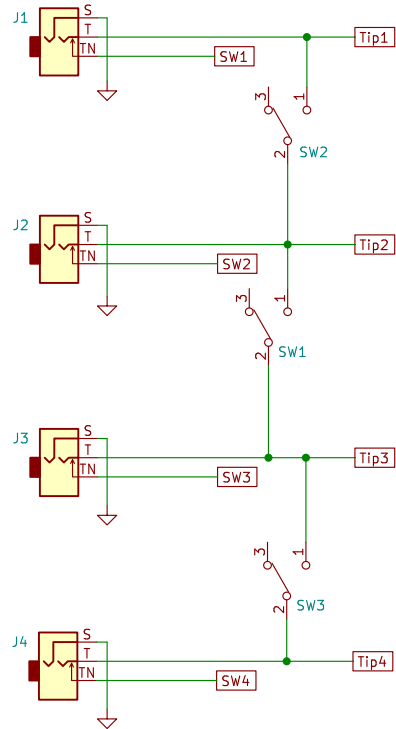


Operating input range: -10V - +10V



Note: Signal indicator LEDs (D1, D3 D5, D7) are installed so that Red indicates positive voltage and Green indicates negative. Switch the polarity of these LEDs to reverse the indication.

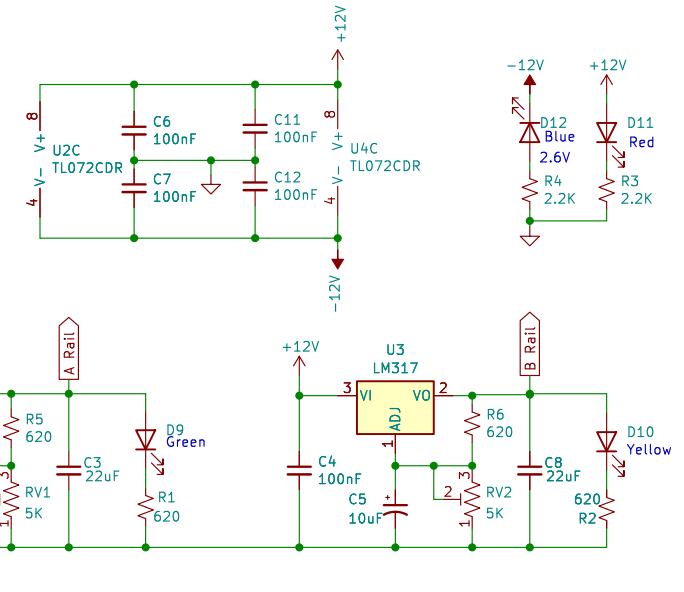

note: the currently spec'd blue LED doesn't fit in the spacer. The spacer is included in case a blue LED is found that fits.

GR2
OSWF_logo

GR1
smallLogo

- S01 LED Spacer
- S02 LED Spacer
- S03 LED Spacer
- S04 LED Spacer
- S05 LED Spacer
- S06 LED Spacer
- S07 LED Spacer
- S08 LED Spacer

Sheet: /
File: sub.kicad_sch

Title:

Size: A4
KiCad E.D.A. 8.0.5

Date:

Rev: 3.2

Id: 1/1