



### ■ Mounting Specifications.



- Recommendable reflow soldering temperature 240 °C

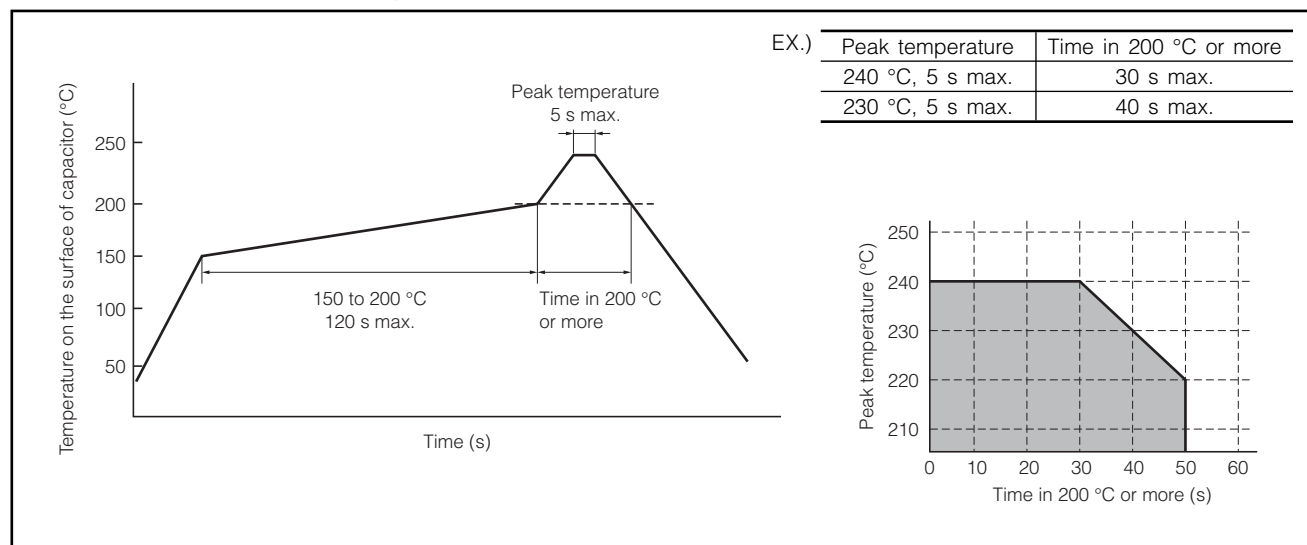

- Recommendable reflow soldering temperature 260 °C

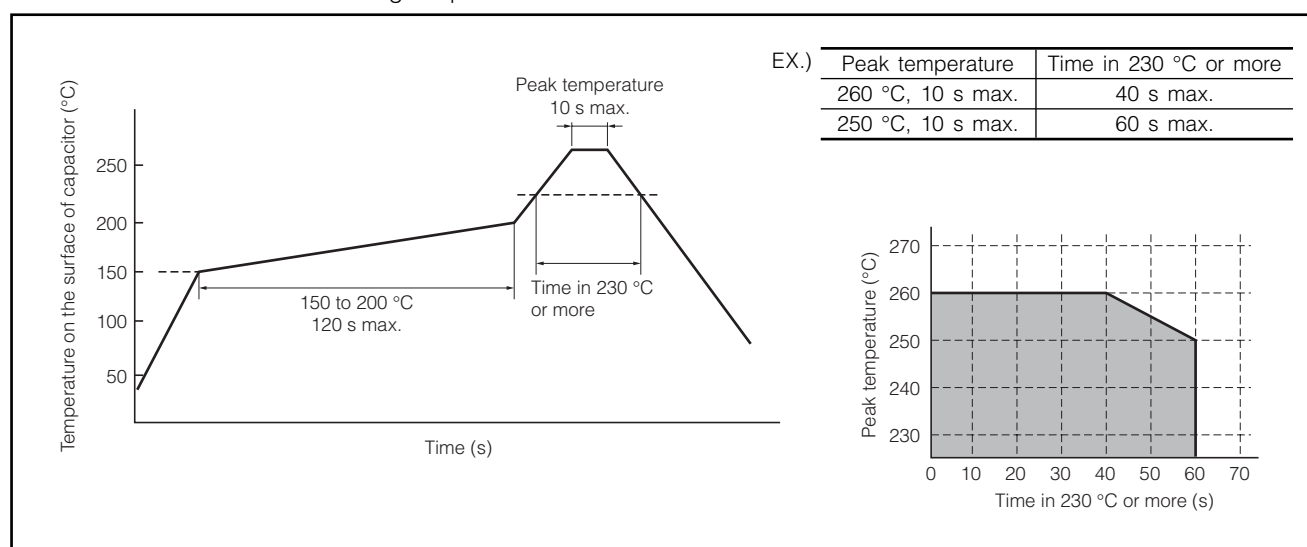


- Typical land pattern (mm)

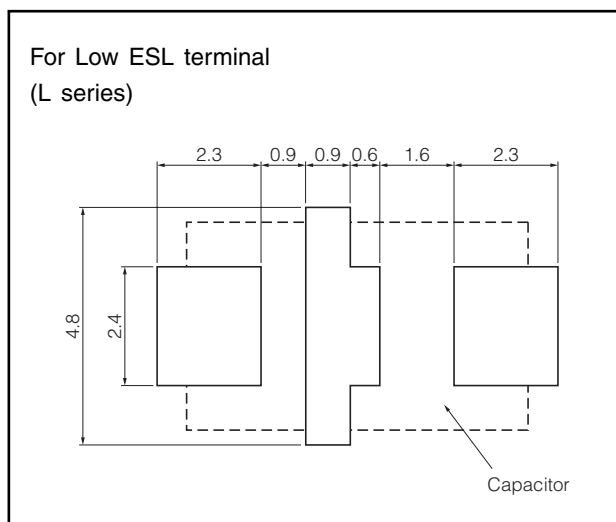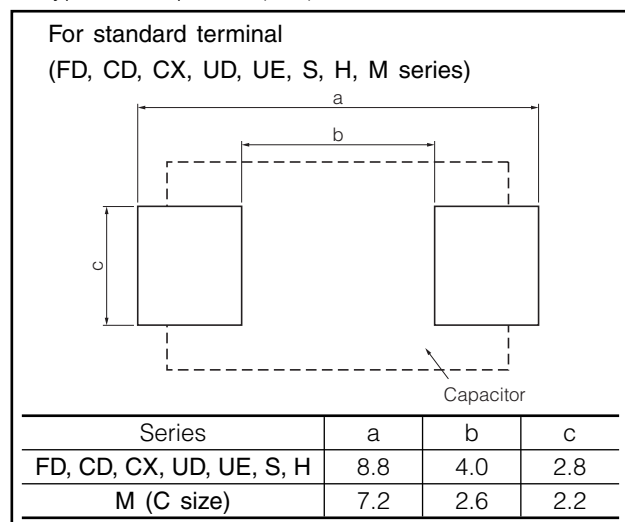


### ■ Packaging Specifications

#### ● Reel Dimensions (mm)

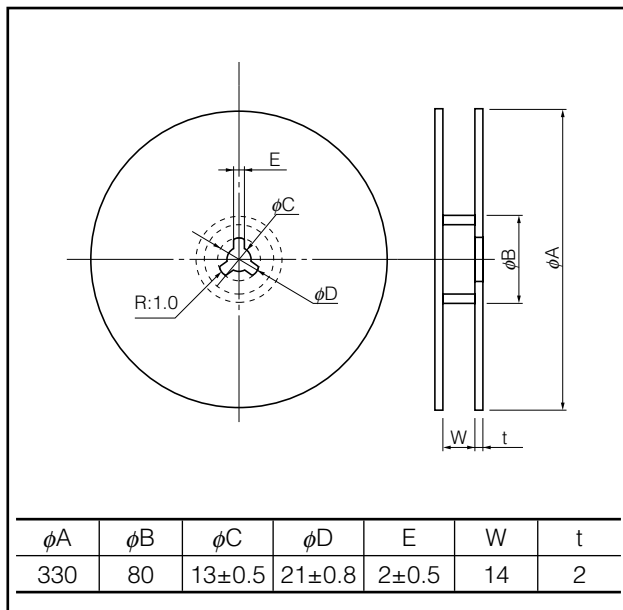

#### ● Embossed Taping (mm)

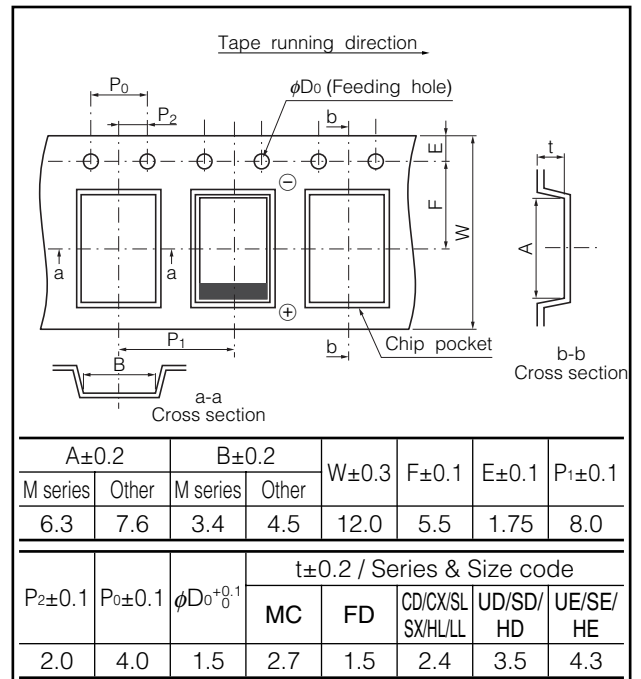

### ■ Packaging Box Dimensions (mm)

