




TD-920
Tag: _____

12" Wide Heavy Duty Trench Drain

SPECIFICATION: Watts Drainage TD-920 12" (305) wide epoxy coated steel trench drain with loose set epoxy coated ductile iron grates, and no hub outlet.

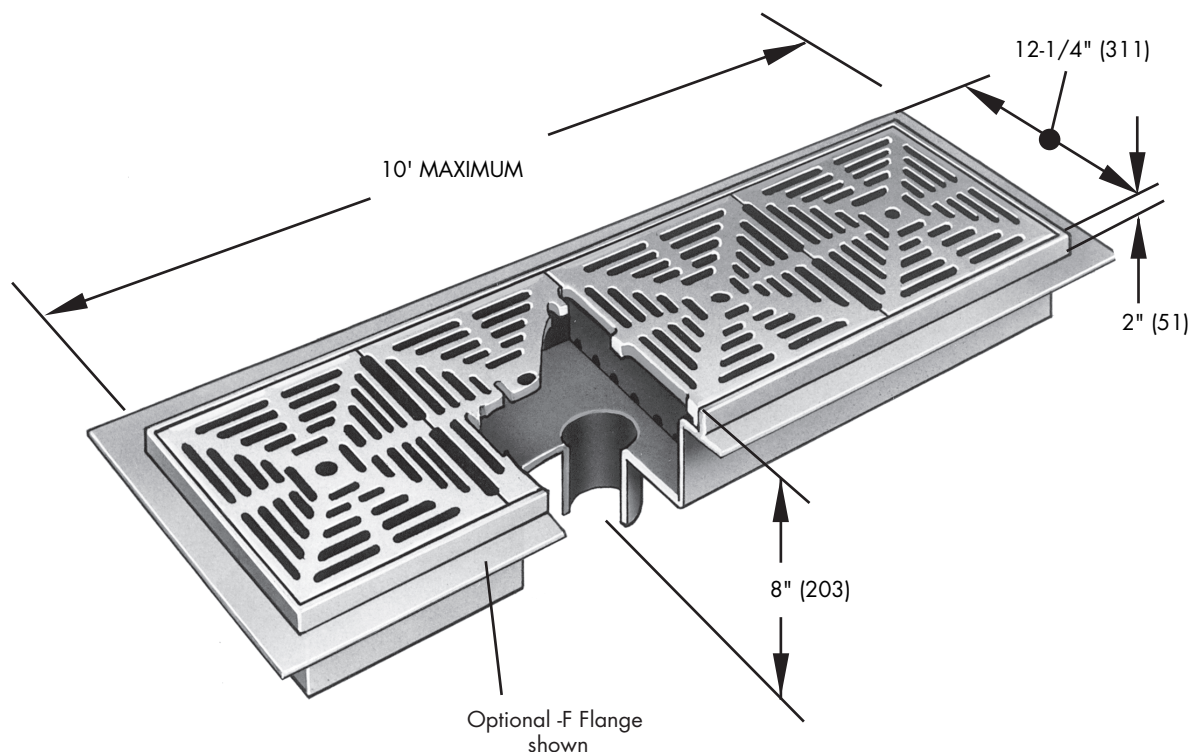

Load Rating & Free Area

Load Rating	Free Area Sq. In.
*XHD	47/ft

* The load classifications are in accordance with the American National Standards ASME A112.21.1M. ASME Ratings are as follows:
XHD - Safe Live Load 7500-10000 lbs.(3375-4500kg)
The above categories are given as a guide only.
Please consult factory.

Pipe Sizing (Select One)		
Suffix	Description	
2	2" (51) Pipe Size	☐
3	3" (76) Pipe Size	☐
4	4" (102) Pipe Size	☐
6	6" (152) Pipe Size	☐

Options (Select One or More)		
Suffix	Description	
-F	Anchor Flange	☐
-FC	Anchor Flange & Clamp	☐
-6	Vandal Proof	☐
-21	Outlet Strainer	☐

Job Name _____ Contractor _____

Job Location _____ Contractor's P.O. No. _____

Engineer _____ Representative _____

WATTS Drainage reserves the right to modify or change product design or construction without prior notice and without incurring any obligation to make similar changes and modifications to products previously or subsequently sold. See your WATTS Drainage representative for any clarification. Dimensions are subject to manufacturing tolerances.



Specification Drainage Products

USA: 100 Watts Road, Spindale, NC, 28160-2298; TEL: 828-288-2179 TOLL-FREE: 1-800-338-2581 www.watts.com